



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!




## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



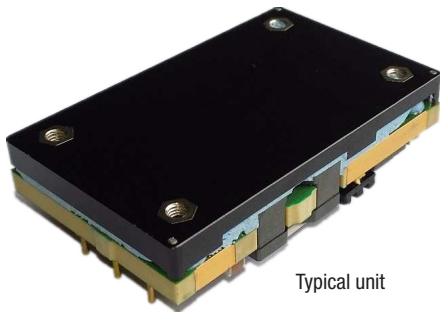

Output (V)	Current (A)	Nominal Input (V)
8.0	100	48

Optimized for distributed power Regulated Intermediate Bus Architectures (RIBA), the DRQ-8/100-L48NBxxxx-C series offer regulated outputs in a quarter brick baseplate package.

### FEATURES

- Regulated Intermediate Bus Architecture (RIBA)
- 95.8% ultra-high efficiency at full load
- 36V-60V DC input range (48V nominal)
- Monotonic startup into pre-bias output conditions
- Over-current & Over-temperature protection
- Synchronous rectifier topology
- Stable no-load operation
- Up to +85° Celsius thermal performance (with derating)
- Remote On/Off enable control
- Fully isolated to 1500VDC
- Extensive protection features- UVLO, OVLO, OC, SC, OT
- Complies with emissions and environmental requirements.
- UL 60950-1, CAN/CSA C22.2 No. 60950-1 Certification

### PRODUCT OVERVIEW

The DRQ-8/100-L48NB-C regulated converter module deliver a 8.0V output @  $V_{in} = 48V_{dc}$  in a quarter brick open frame package at astonishing efficiency. The fully isolated (1500Vdc) DRQ-8/100-L48NBxxxx-C series accept a 36 to 60 Volt DC input voltage range and converts it to a low Vdc output that drives external point-of-load (PoL) DC-DC power converters such as Murata Power Solutions' tiny Okami series which feature precise regulation directly at the load. Applications include datacom and telecom installations, cellular data-phone repeaters, base stations, instruments and embedded systems. Wideband output ripple and noise is a low 100mV, peak-to-peak.

The DRQ's synchronous-rectifier topology and fixed frequency operations means excellent efficiencies up to 95.8 %.

A wealth of electronic protection features include input under voltage lockout, over voltage lockout protection, output current limit, current sharing, short circuit hiccup, Vout overshoot, and over temperature shutdown. Available options include various pin lengths and the baseplate. Assembled using ISO-certified automated surface-mount techniques, the DRQ series is designed to meet the applicable requirements of UL and IEC 60950-1, EN55022/CISPR22 conducted emissions and UL94V-0 flammability.

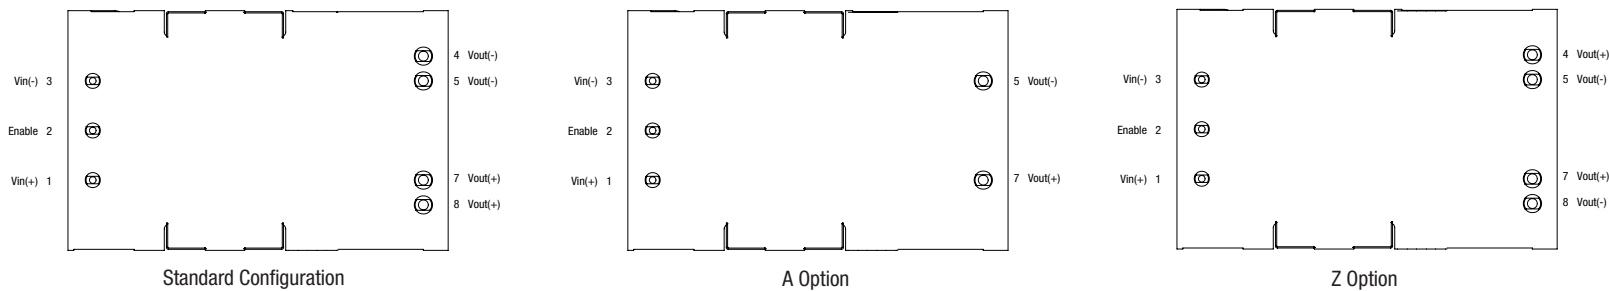


Figure 1. Bottom View of typical unit Pin-out Options




**PERFORMANCE SPECIFICATIONS SUMMARY AND ORDERING GUIDE**

Root Model ①	Output				Input				Efficiency	Dimensions with baseplate	
	V <sub>OUT</sub> (V)	I <sub>OUT</sub> (A, max)	Total Power (W)	Ripple & Noise (mVp-p)	V <sub>IN</sub> Nom. (V)	Range (V)	I <sub>IN</sub> , no load (mA)	I <sub>IN</sub> , full load (A)		Typ.	Case (inches)
	Max.										
<b>DRQ-8/100-L48NB-C</b>	8.0	100	800	150	48	36-60	200	20	95.8%	2.3 x 1.45 x 0.57	58.42 x 36.83 x 14.47

① Please refer to the part number structure for additional options and complete ordering part numbers.

② All specifications are at nominal line voltage and full load, +25 °C, unless otherwise noted. See detailed specifications. Cout = 700µF, approximately 50% ceramic, 50% Oscon or POSCAP. I/O caps are necessary for our test equipment and may not be needed for your application.

**PART NUMBER STRUCTURE**

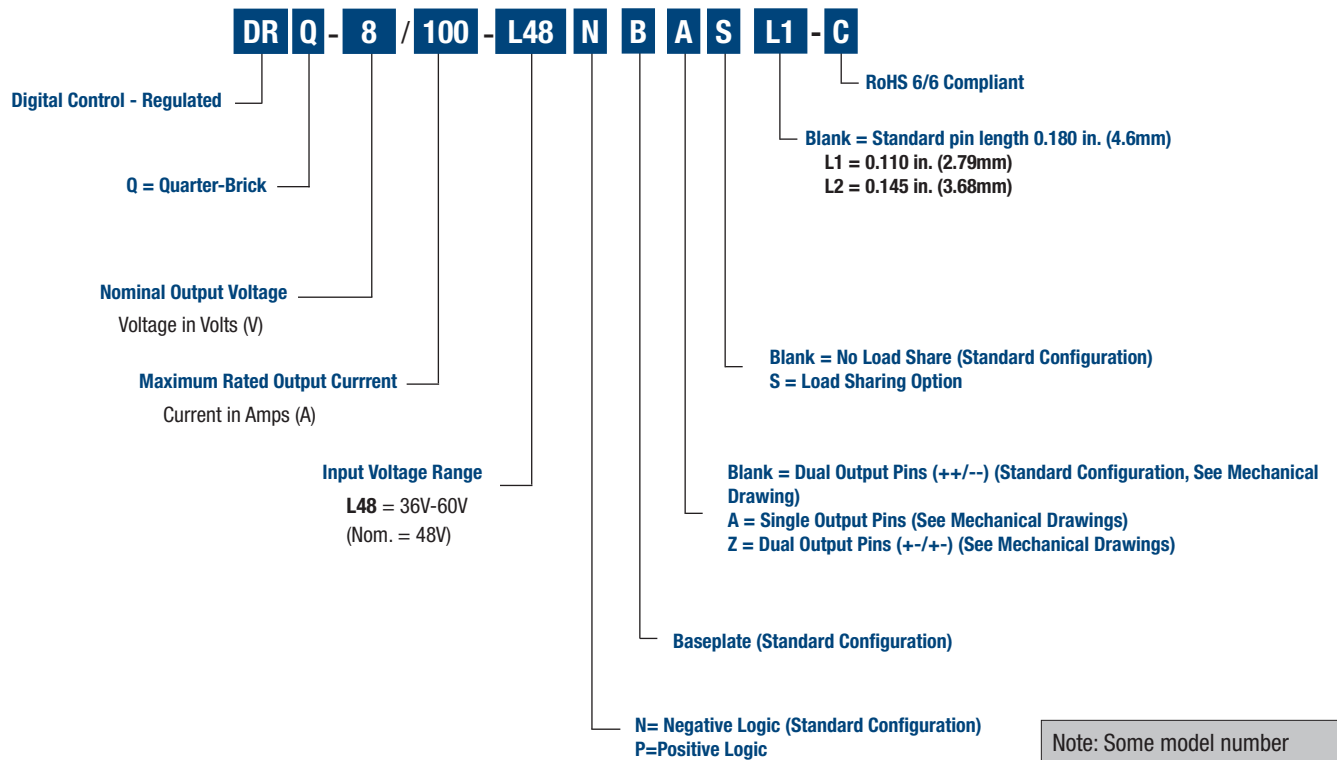

Note: Some model number combinations will be special order only. See website or contact your local Murata sales representative.



### FUNCTIONAL SPECIFICATIONS

ABSOLUTE MAXIMUM RATINGS					
	Conditions	Minimum	Typical/Nominal	Maximum	Units
Input Voltage, Continuous		36	48	60	Vdc
Input Voltage, Transient	100 mS max. duration			75	Vdc
Isolation Voltage	Input to output	1500			Vdc
On/Off Remote Control	Referred to -Vin			20	Vdc
Output Power		0		800	W
Output Current	Current-limited, no damage, short-circuit protected	0		100	A
Storage Temperature Range	Vin = Zero (no power)	-55		125	°C
Absolute maximums are stress ratings. Exposure of devices to greater than any of these conditions may adversely affect long-term reliability. Proper operation under conditions other than those listed in the Performance/Functional Specifications Table is not implied nor recommended.					
INPUT					
Operating Input Voltage Range		36	48	60	Vdc
Start up Voltage		33.0	34.5	36.0	Vdc
Undervoltage Shutdown		31.0	32.5	34.0	Vdc
UVLO Hysteresis		1.50		4.00	Vdc
Overvoltage Shutdown		76.0	80.0	84.0	Vdc
Overvoltage Shutdown Recover	latch				Vdc
Internal Filter Type			Pi		
External Input fuse				35	A
External Input Capacitance		140		800	µF
Input current					
Full Load Conditions	Vin = nominal		17.30	20.00	A
Low Line input current	Vin = minimum		23.20	25.00	A
Inrush Current <sup>Ⓢ</sup>				50	% of lin
Short Circuit input current			0.8		A
No Load input current	Iout = minimum, unit=ON		200	400	mA
Shut-Down input current(Off, UV, OT)			20	50	mA
Back Ripple Current				1000	mArms
GENERAL and SAFETY					
Efficiency	Vin=48V, full load	95.0	95.8		%
Isolation Voltage(Test Voltage)	Input to output	1500			Vdc
	Input to Baseplate	1000			Vdc
	Output to Baseplate	1000			Vdc
Insulation Safety Rating			Operational		
Isolation Capacitance			1000		pF
Safety	Certified to UL-60950-1, CSA-C22.2 No.60950-1, IEC/EN60950-1, 2nd edition				
Flammability	UL94 V-0				
Calculated MTBF	Per Telcordia SR-332, Issue 3, Method 1, Class 1, Ground Fixed, Tcase=+40°C		4800		Hours x 10 <sup>3</sup>
DYNAMIC CHARACTERISTICS					
Switching Frequency			220		KHz
Turn On Time					
Vin Startup Delay	Time from Vin reaching UVLO to Vout reaching 10% of Vout_nominal	20	25	30	mS
Enable Startup Delay	Time from enable edge to Vout reaching 10% of Vout_nominal		2.5	5	mS
Vout Rise Time					
From 0%~100%				15	mS
Dynamic Load Response	50-75-50%, 1A/uS, 4uF/W of external output capacitance, within 1% of Vout			500	µS
Dynamic Load Peak Deviation	same as above			±350	mV
FEATURES and OPTIONS					
	Conditions	Minimum	Typical/Nominal	Maximum	Units
Remote On/Off Control					
Primary On/Off control (designed to be driving with an open collector logic, Voltages referenced to -Vin)					
"N" suffix:					
Negative Logic, ON state	ON = ground pin or external voltage	-0.1		0.8	Vdc
Negative Logic, OFF state	OFF = pin open or external voltage	2.4		20	Vdc
Control Current	open collector/drain			0.2	mA
"P" suffix:					
Positive Logic, OFF state	OFF = ground pin or external voltage	-0.1		0.8	Vdc
Positive Logic, ON state	ON = pin open or external voltage	2.4		20	Vdc
Control Current :	open collector/drain			0.2	mA

### FUNCTIONAL SPECIFICATIONS (CONT.)


OUTPUT	Conditions	Minimum	Typical/Nominal	Maximum	Units
<b>Total Output Power</b>		0	800	800	W
<b>Voltage</b>					
<b>Output Voltage: Standard Option</b>		7.90	8.00	8.10	Vdc
<b>Setting Accuracy</b>	At 0% Load, No Trim, All Conditions	7.97	8.00	8.03	Vdc
<b>Setting Accuracy</b>	At 50% Load, No Trim, All Conditions	7.90	8.00	8.10	Vdc
<b>Setting Accuracy</b>	At 100% Load, No Trim, All Conditions	7.90	8.00	8.10	Vdc
<b>Overvoltage Protection</b>		9.50	10.00	10.50	Vdc
<b>Current</b>					
<b>Output Current Range</b>		0	100	100	A
<b>Minimum Load</b>			No minimum load		
<b>Current Limit Inception</b>	90% of Vout	110	120	130	A
<b>Short Circuit</b>					
<b>Short Circuit Duration (remove short for recovery)</b>	Output shorted to ground, no damage		Continuous		
<b>Short circuit protection method</b>	Hiccup current limiting		Non-latching		
<b>Regulation</b>					
<b>Line Regulation</b>	Vin = 36-60, Vout = nom., full load			±0.5	%
<b>Load Regulation (No droop)</b>	Iout = min. to max., Vin = nom.			±0.5	%
<b>Ripple and Noise</b>	20 MHz BW, Cout=700µF, 50% ceramic, 50% OSCON or POSCAP.		100	150	mV pk-pk
<b>Temperature Coefficient (No droop)</b>	At all outputs			0.02	% of Vnom./°C
<b>Output Capacitance</b>		0		10,000	µF
<b>MECHANICAL</b>					
<b>Outline Dimensions (with baseplate)</b>			2.3 x 1.45 x 0.57		Inches
			58.4 x 36.83 x 14.47		mm
<b>Weight (with baseplate)</b>			3.14		Ounces
			80		Grams
<b>Through Hole Pin Diameter</b>			0.06 & 0.04		Inches
			1.524 & 1.016		mm
<b>Through Hole Pin Material</b>			Copper alloy		
<b>TH Pin Plating Metal and Thickness</b>	Nickel subplate		98.4-299		µ-inches
	Gold overplate		4.7-19.6		µ-inches
<b>ENVIRONMENTAL</b>					
<b>Operating Ambient Temperature Range</b>	with derating	-40		85	°C
<b>Operating Baseplate Temperature</b>	no derating required	-40		120	°C
<b>Storage Temperature</b>	Vin = Zero (no power)	-55		125	°C
<b>Thermal Protection/Shutdown (with "B" Suffix)</b>	Case temperature, measured in the center		130		°C
<b>Electromagnetic Interference Conducted, EN55022/CISPR22</b>	External filter required; see emissions performance test.		B		Class
<b>RoHS rating</b>			RoHS-6		

### Notes


- ① Unless otherwise noted, all specifications apply over the input voltage range, full temperature range, nominal output voltage and full output load. General conditions are near sea level altitude, heat sink installed and natural convection airflow unless otherwise specified. All models are tested and specified with external parallel 1 µF and 10 µF multi-layer ceramic output capacitors. No external input capacitor is used (see Application Notes). All capacitors are low-ESR types wired close to the converter. These capacitors are necessary for our test equipment and may not be needed in the user's application.
- ② Measured at input pin with maximum specified Cin and <500µH inductance between voltage source and Cin
- ③ All models are stable and regulate to specification under no load.
- ④ The Remote On/Off Control is referred to -Vin.
- ⑤ Inrush Current is defined as the peak current drawn by the Unit when Unit is enabled after Vin is present. Iin is defined as the steady-state operating current when Unit is operating at Vin Max and Rated Power. While Vout is rising, Pout is ≤25% of Rated Power with a resistive load.

### PERFORMANCE DATA


Efficiency vs. Line Voltage and Load Current @ +25°C

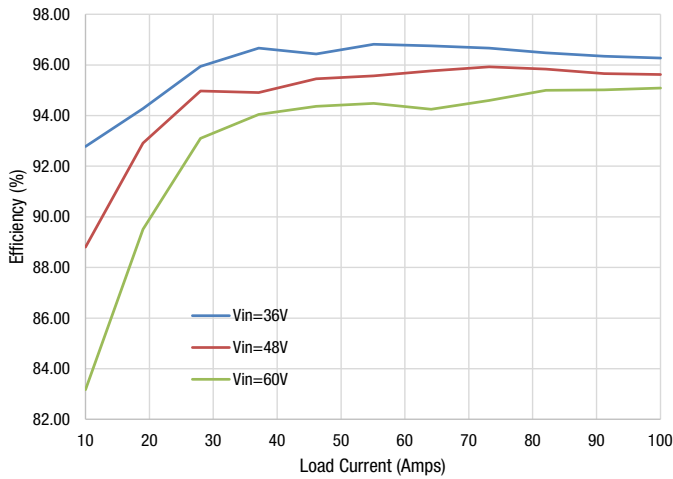


Power Loss vs. Line Voltage and Load Current @ +25°C

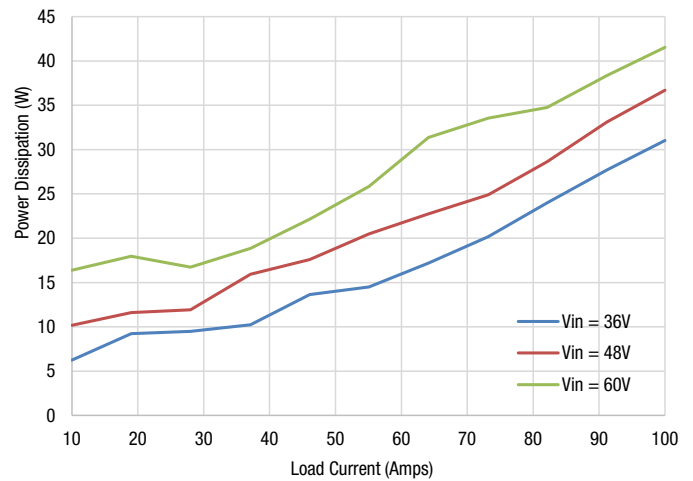


Dual Output Pins Maximum Current Temperature Derating at sea level (Vin = 48V, airflow from Vin to Vout, with heatsink)\*

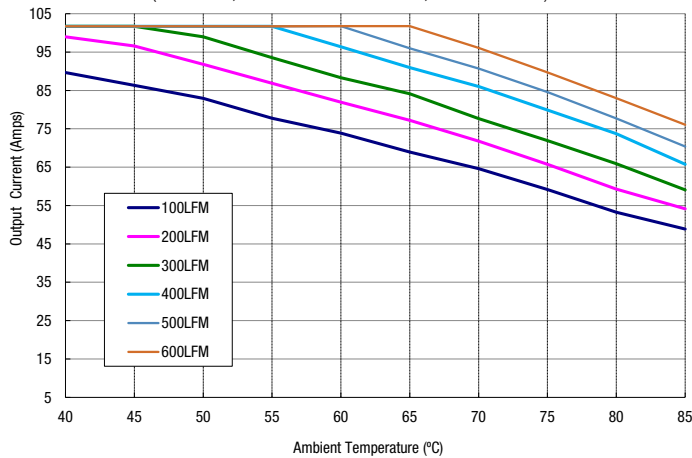


Single Output Pins Maximum Current Temperature Derating at sea level (Vin = 48V, airflow from Vin to Vout, with heatsink)\*

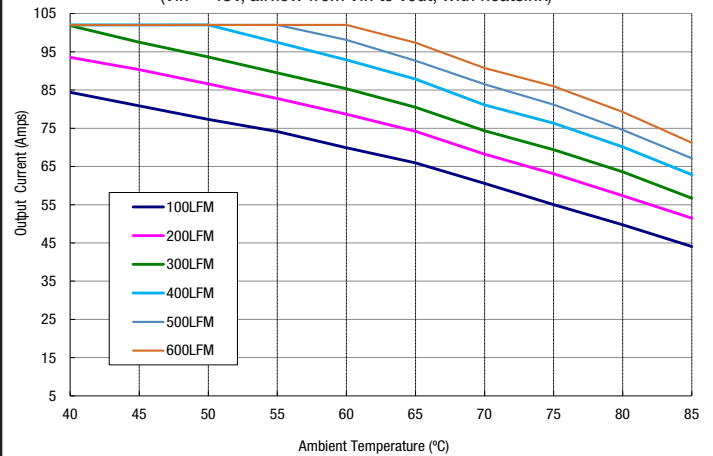

Dual Output Pins Maximum Output Power Temperature Derating at sea level (Vin = 48V, airflow from Vin to Vout, with heatsink)\*

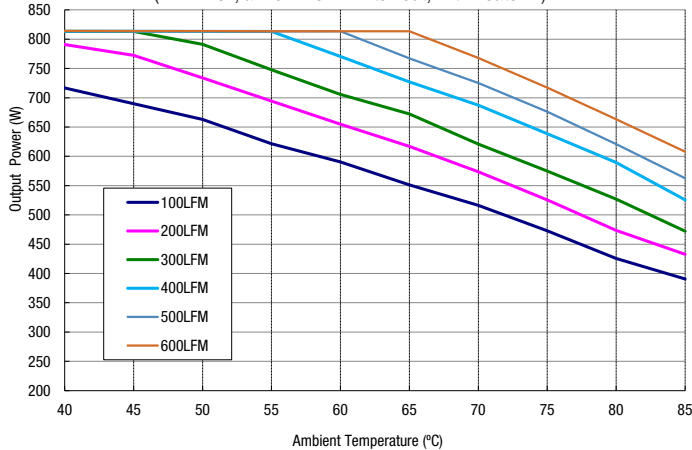

Single Output Pins Maximum Output Power Temperature Derating at sea level (Vin = 48V, airflow from Vin to Vout, with heatsink)\*

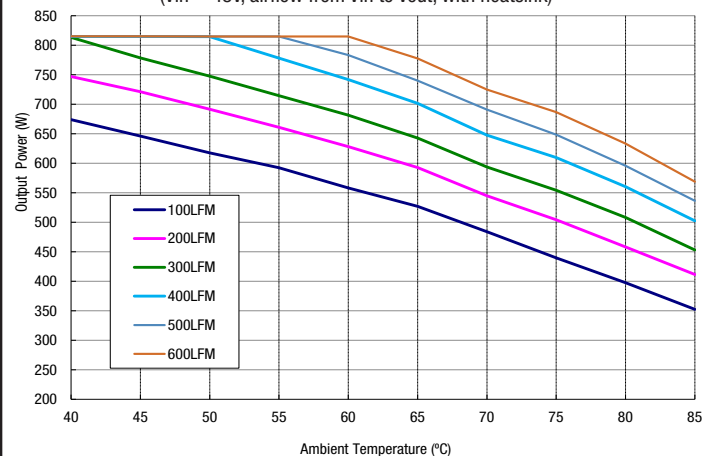

See Page 8 for heatsink information.

NOTE: The heatsink is not available as an option. It is only used in the thermal testing of this device.

## PERFORMANCE DATA

Enable Startup Delay (Vin = 48V, Iout = 100A, Cout = 0μF, Ta = +25°C)  
Top Trace = Vout, Bottom Trace = Enable, 5mS/div




Startup Delay (Vin = 48V, Iout = 100A, Cout = 0μF, Ta = +25°C)  
Top Trace = Vout, Bottom Trace = Vin, 10mS/div




### Stepload Transient Response

(Vin = 48V, Iout = 50-75-50% of Iout, Cload = 3200μF, Ta = +25°C, 2mS/div)

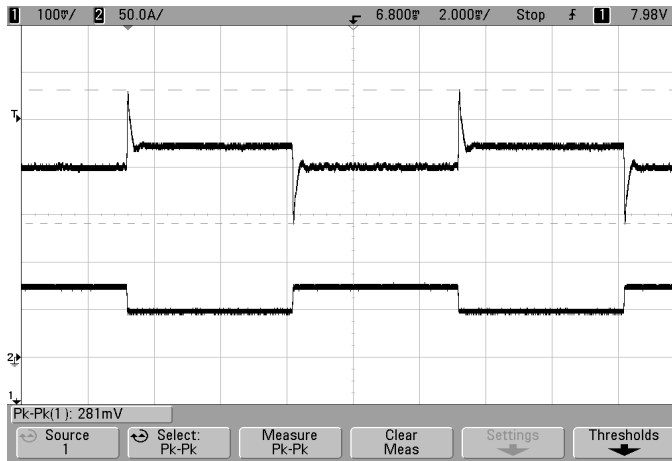


### Stepload Transient Response

(Vin = 48V, Iout = 25-75-25% of Iout, Cload = 3200μF, Ta = +25°C, 2mS/div)

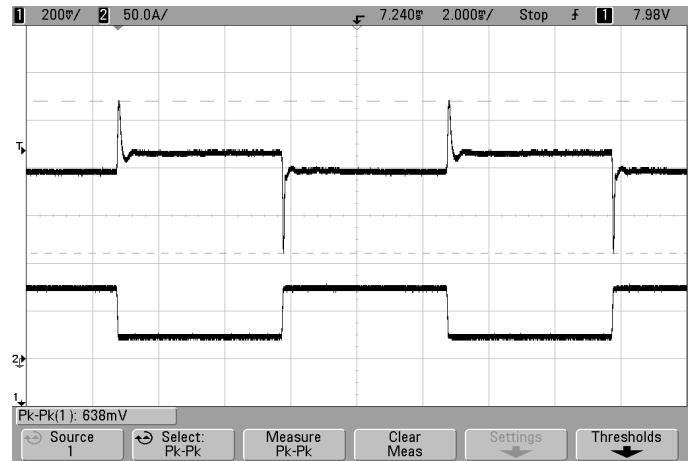


### Output Ripple & Noise @20MHz

(Vin = 48V, Iout = 0A, Cout = 700μF, Ta = +25°C, 2μS/div)

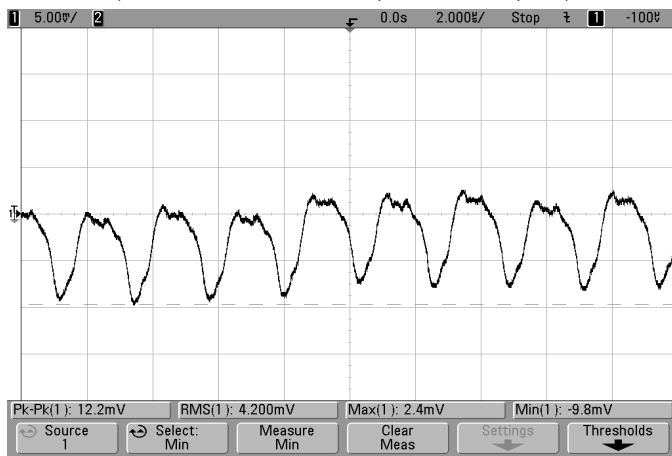


### Output Ripple & Noise @20MHz

(Vin = 48V, Iout = 100A, Cout = 700μF, Ta = +25°C, 2μS/div)

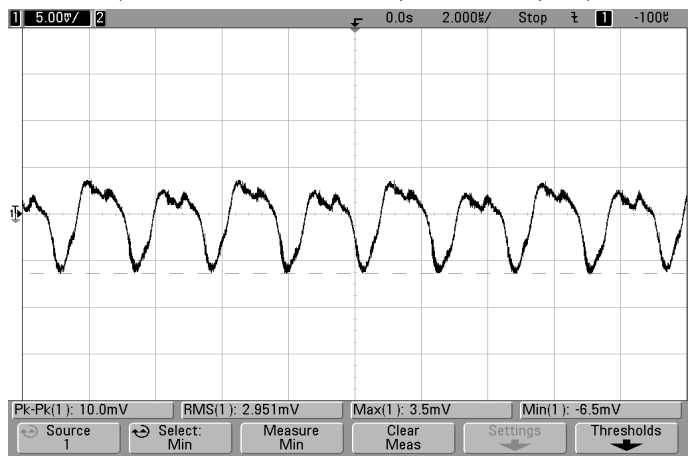




## PERFORMANCE DATA

Current Share@ +25°C

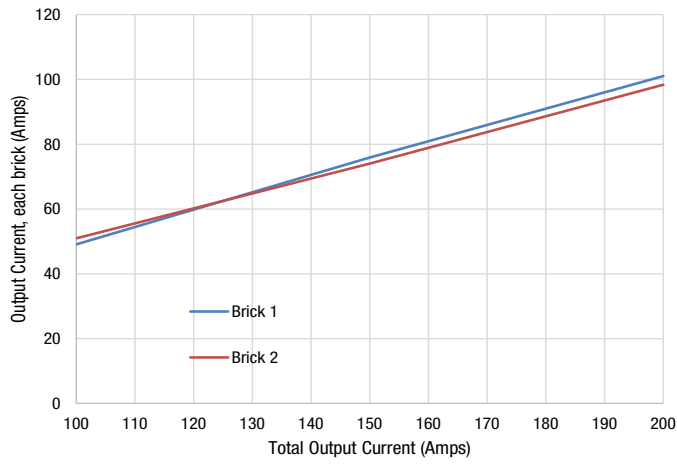




**MECHANICAL SPECIFICATIONS (THROUGH-HOLE MOUNT)**

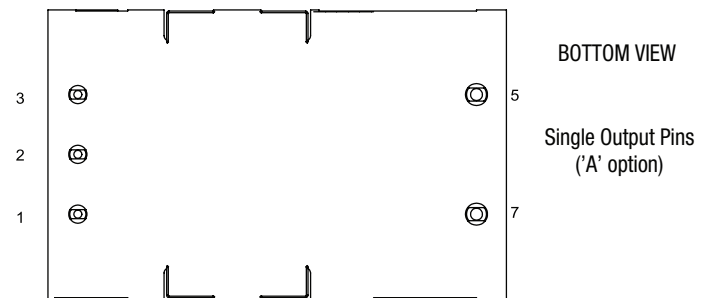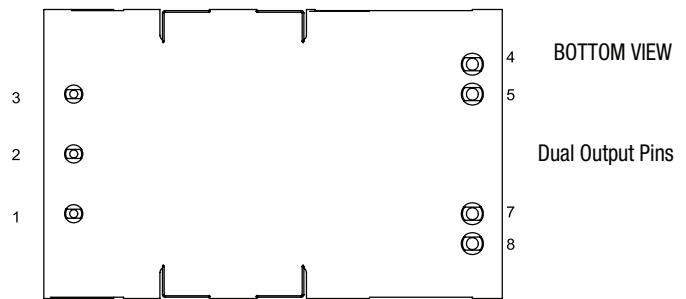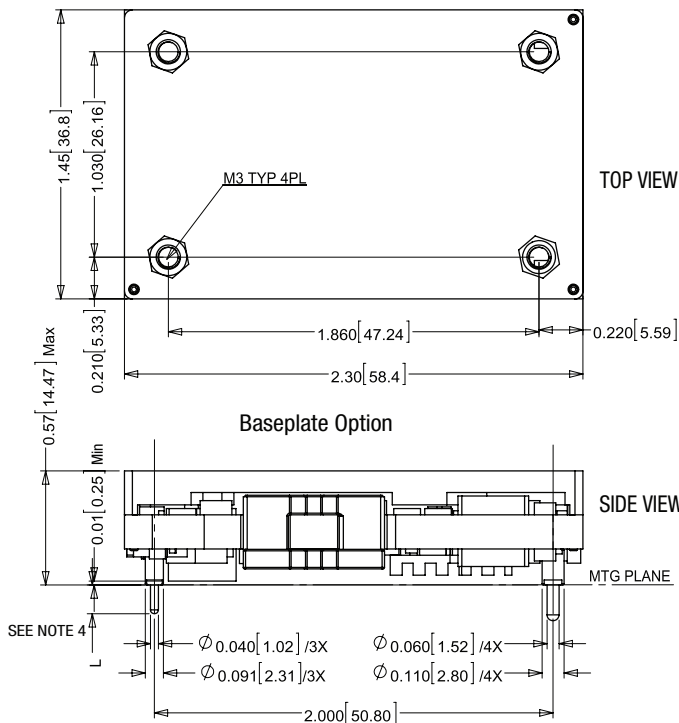

Dimensions are in inches (mm shown for ref. only).



Tolerances (unless otherwise specified):  
 .XX ± 0.02 (0.5)  
 .XXX ± 0.010 (0.25)  
 Angles ± 2°

Components are shown for reference only and may vary between units.

Pin Material  
 Pin No. 1-3: Dia 0.04", Copper Alloy  
 Pin No. 4, 5, 7, 8: Dia 0.06", Copper Alloy

Finish: (All Pins)  
 Gold (5u"Min) OverNickel(100u"Min)







- NOTES:  
 UNLESS OTHERWISE SPECIFIED;  
 1:M3 SCREW USED TO BOLT UNIT'S BASEPLATE TO OTHER SURFACES(SUCH AS HEATSINK) MUST NOT EXCEED 0.110"(2.8mm) DEPTH BELOW THE SURFACE OF BASEPLATE  
 2:APPLIED TORQUE PER SCREW SHOULD NOT EXCEED 5.31n-lb(0.6Nm);  
 3:ALL DIMENSION ARE IN INCHES[MILIMETER];  
 4:STANDARD PIN LENGTH: 0.180 Inch  
 FOR L2 PIN LENGTH OPTION IN MODEL NAME., USE STANDARD L2 PIN WITH PIN LENGTH TO 0.145 Inch  
 6:ALL TOLERANCES: x.xx in, ±0.02 in(x.x mm, ±0.5 mm)  
 x.xxx in, ±0.01 in(x.x mm, ±0.25 mm)  
 7:COMPONENT WILL VARY BETWEEN MODELS

INPUT/OUTPUT CONNECTIONS Standard (Blank) Option			
PIN	FUNCTION	PIN	FUNCTION
1	Vin(+)	5	Vout(-)
2	Enable		
3	Vin(-)	7	Vout(+)
4	Vout(-)	8	Vout(+)


INPUT/OUTPUT CONNECTIONS A Option			
PIN	FUNCTION	PIN	FUNCTION
1	Vin(+)	5	Vout(-)
2	Enable		
3	Vin(-)	7	Vout(+)
4	NA	8	NA

INPUT/OUTPUT CONNECTIONS Z Option			
PIN	FUNCTION	PIN	FUNCTION
1	Vin(+)	5	Vout(-)
2	Enable		
3	Vin(-)	7	Vout(+)
4	Vout(+)	8	Vout(-)

**MECHANICAL SPECIFICATIONS (THROUGH-HOLE MOUNT)**

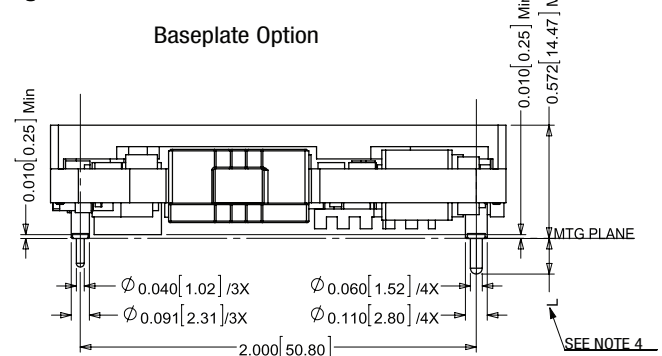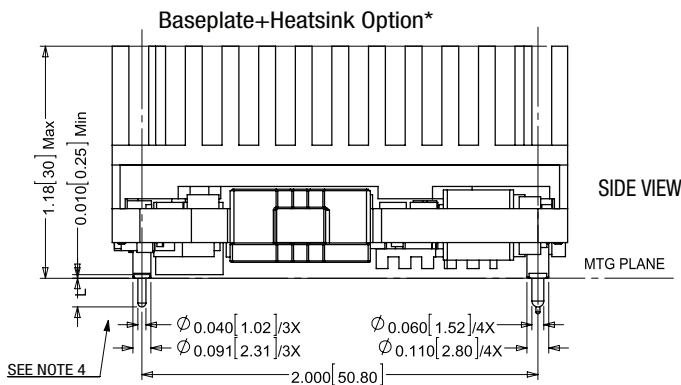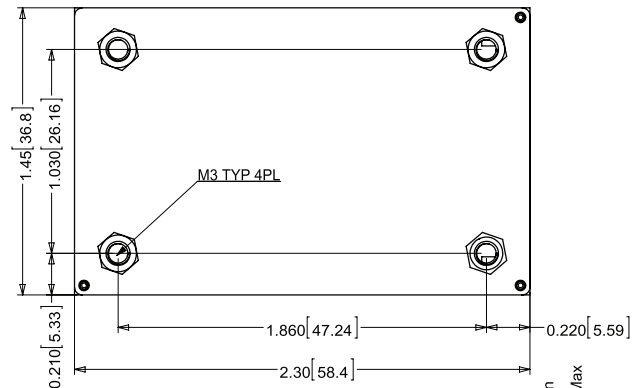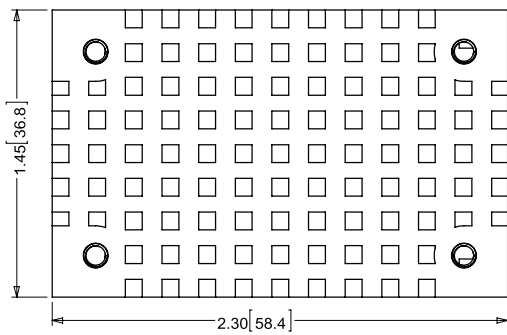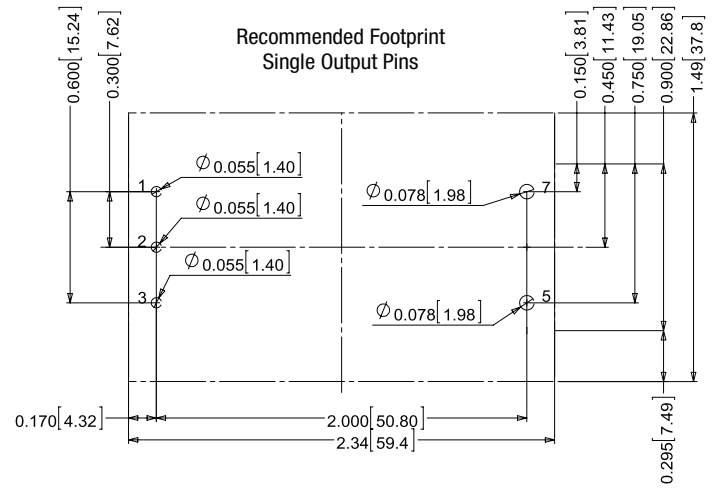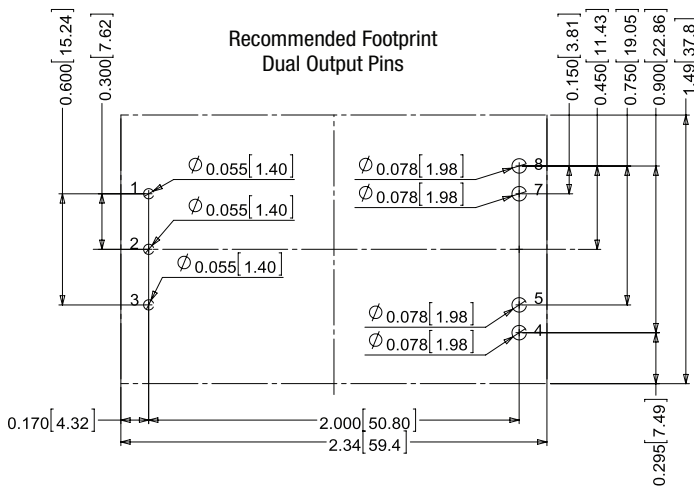

Dimensions are in inches (mm shown for ref. only).




Tolerances (unless otherwise specified):  
 .XX ± 0.02 (0.5)  
 .XXX ± 0.010 (0.25)  
 Angles ± 2°

Components are shown for reference only and may vary between units.

**BOTTOM VIEW**


- NOTES:  
 UNLESS OTHERWISE SPECIFIED:  
 1: M3 SCREW USED TO BOLT UNIT'S BASEPLATE TO OTHER SURFACES (SUCH AS HEATSINK) MUST NOT EXCEED 0.110" (2.8mm) DEPTH BELOW THE SURFACE OF BASEPLATE  
 2: APPLIED TORQUE PER SCREW SHOULD NOT EXCEED 5.3in-lb (0.6Nm);  
 3: ALL DIMENSION ARE IN INCHES [MILLIMETER];  
 4: STANDARD PIN LENGTH: 0.180 Inch  
 FOR L2 PIN LENGTH OPTION IN MODEL NAME., USE STANDARD L2 PIN WITH PIN LENGTH TO 0.145 Inch  
 5: ALL TOLERANCES: x.xxxin, ±0.02in (x.xxxmm, ±0.5mm)  
 x.xxxin, ±0.01in (x.xxxmm, ±0.25mm)  
 6: COMPONENT WILL VARY BETWEEN MODELS  
 \*NOTE THE HEATSINK IS NOT AVAILABLE AS AN OPTION, IT IS ONLY USED IN THE THERMAL TEST OF THIS DEVICE.

**SHIPPING TRAYS AND BOXES, THROUGH-HOLE MOUNT**

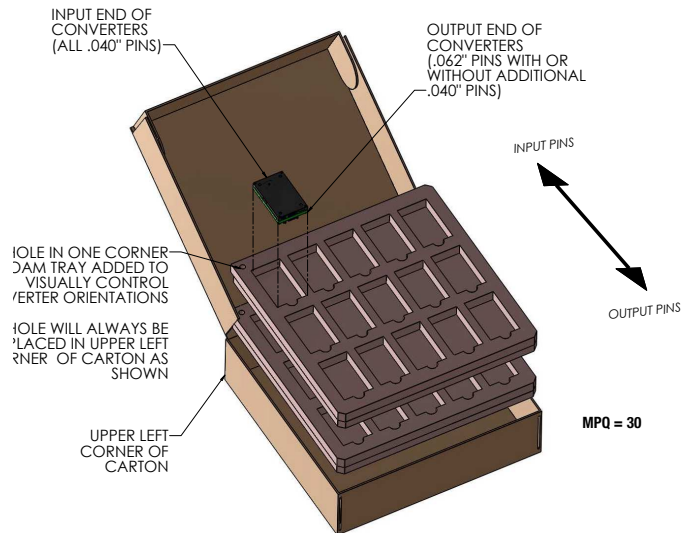

**SHIPPING TRAY DIMENSIONS**

DRQ modules are supplied in a 15-piece (5 x 3) shipping tray. The tray is an anti-static closed-cell polyethylene foam. Dimensions are shown below.

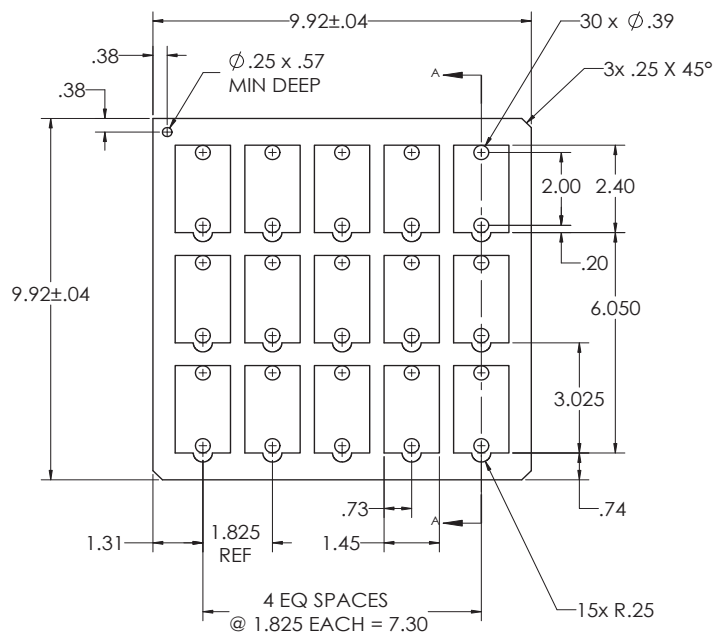

**NOTES:**

1. MATERIAL: DOW ETHAFOAM SELECT ANTI-STATIC, COLOR PINK, LOW DENSITY CLOSED CELL POLYETHYLENE FOAM
2. ALL DIMENSIONS IN INCHES
3. ASSEMBLY CONSISTS OF DIE-CUT FRAME WITH 'SOLID' BASE, GLUED TOGETHER. GLUE NOT PERMITTED WITHIN CUTOUT POCKETS.

**TECHNICAL NOTES**

### Load Sharing

Load sharing occurs when two or more DRQ-8/100-L48NB-Cs are connected in parallel at both the input and output terminals to supply greater output current than one unit alone or to offer system redundancy for moderate loads. If one converter fails, the other converter(s) will carry the load until the system is repaired.

The DRQ-8/100-L48NB-C's design allows load sharing using the "droop" method, also called the "direct connect" technique. Simply put, at light loads, the converter with slightly higher output voltage will carry more of the output current. Since the DRQ-8/100-L48NB-C's synchronous rectifier design will not accept appreciable reverse output current, starting at zero load, the DRQ-8/100-L48NB-C with the higher output voltage will carry more of the full load until the voltage at the output drops to that of the lower DRQ-8/100-L48NB-C's.

### Load Sharing Guidelines

If you wish to operate two or more DRQ-8/100-L48NB-C's in load sharing, use these guidelines:

[1] Operate both converters connected in parallel to the same 48V input power source. This simplifies the design and makes more balanced power sharing. Using two different 48V input supplies must be carefully analyzed to avoid overloading one of the converters and is not recommended.

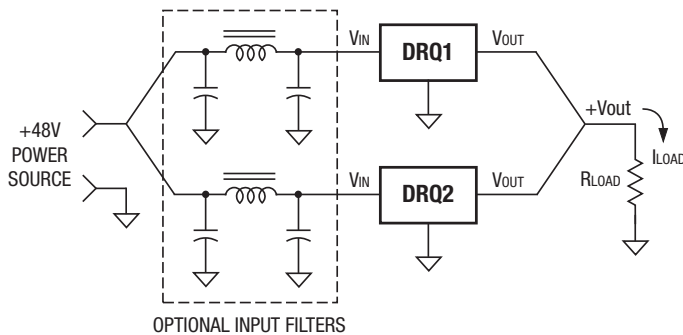


Figure 2. Load Sharing Block Diagram

Make sure the single 48V input source can supply the total current needed by all the parallel-connected DRQ-8/100-L48NB-C's. (Actually, it is possible to rate the full system at more than the current capacity of a single DRQ-8/100-L48NB-C. However, you now lose the redundancy protection feature.)

[2] Use conservative loading. Do not assume for example that two parallel DRQ-8/100-L48NB-C's can always supply "times two" amounts of output current. Allow for limits in input voltage and other factors.

If one DRQ-8/100-L48NB-C overloads while in load share, it will protect itself by entering the overcurrent mode. If the whole system is running close to maximum output current, the remaining good DRQ-8/100-L48NB-C will soon also enter overcurrent mode. These two events probably will not happen together, possibly leaving the system operating in degraded mode for awhile. The solution here is conservative design to avoid getting close to the load limits.

[3] Make the input wiring lengths and wire gauges identical on both inputs and outputs. If in doubt, make some precision measurements under full load.

But if you attempt to measure the current in one of the converters using a series shunt, remember that the current meter itself may introduce enough finite resistance to affect the readings. (Hint: Use a non-contacting "clamp-on" Hall effect DC current meter with zero IR loss.)

[4] If you add the optional input filters, use identical components with the same layout.

[5] Operate both converters in the same temperature and airflow environment. Under load sharing, small differences in cooling can amplify into load imbalances.

[6] Avoid operation near the low input voltage limit of the converter. Another subtle factor here is the external source impedance of the input supply. A source with higher source impedance at full load may make the net input voltage seen by the converter close to its minimum input voltage. Be sure to account for the decrease in effective input voltage under load.

For battery sources, this means that the batteries should be freshly charged and that the AC trickle charger is in good working order. Note that older batteries increase their internal cell impedance even if their no-load output voltage appears acceptable. Remember that what counts here is the voltage seen at the DRQ-8/100-L48NB-C input connections with full current.

[7] As with any system design, thoroughly test the DRQ-8/100-L48NB-C's connected in load sharing before committing the design to a real application.

**CAUTION** – This converter is not internally fused. To avoid danger to persons or equipment and to retain safety certification, the user must connect an external fast-blow input fuse as listed in the specifications. Be sure that the PC board pad area and etch size are adequate to provide enough current so that the fuse will blow with an overload.

### Start Up Considerations

When power is first applied to the DC/DC converter, there is some risk of start up difficulties if you do not have both low AC and DC impedance and adequate regulation of the input source. Make sure that your source supply does not allow the instantaneous input voltage to go below the minimum voltage at all times.

Use a moderate size capacitor very close to the input terminals. You may need two or more parallel capacitors. A larger electrolytic or ceramic cap supplies the surge current and a smaller parallel low-ESR ceramic cap gives low AC impedance.

Remember that the input current is carried both by the wiring and the ground plane return. Make sure the ground plane uses adequate thickness copper. Run additional bus wire if necessary.

### On/Off Control

The input-side, remote On/Off Control function (pin 2) can be ordered to operate with either logic type:

Negative ("N" suffix): Negative-logic devices are off when pin 2 is left open (or pulled high, applying +2.4V to 20V), and on when pin 2 is pulled low (-0.1V to 0.8V) with respect to -Input as shown in Figure 3.

Positive (“P” suffix): Positive-logic devices are on when pin 2 is left open (or pulled high, applying +2.4V to +20V), and off when pin 2 is pulled low (-0.1V to 0.8V) with respect to -Input as shown in Figure 3.

Dynamic control of the remote on/off function is best accomplished with a mechanical relay or an open-collector/open-drain drive circuit (optically isolated if appropriate). The drive circuit should be able to sink appropriate current (see Performance Specifications) when activated and withstand appropriate voltage when deactivated. Applying an external voltage to pin 2 when no input power is applied to the converter can cause permanent damage to the converter.

### Input Fusing

Certain applications and/or safety agencies may require fuses at the inputs of power conversion components. Fuses should also be used when there is the

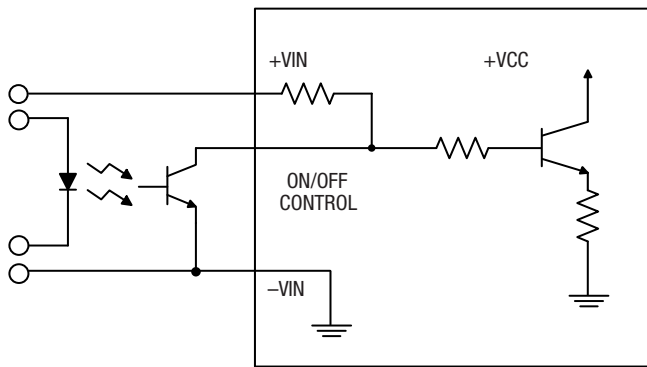


Figure 3. Driving the Negative Logic On/Off Control Pin

possibility of sustained input voltage reversal which is not current-limited. For greatest safety, we recommend a fast blow fuse installed in the ungrounded input supply line.

### Input Under-Voltage Shutdown and Start-Up Threshold

Under normal start-up conditions, converters will not begin to regulate properly until the rising input voltage exceeds and remains at the Start-Up Threshold Voltage (see Specifications). Once operating, converters will not turn off until the input voltage drops below the Under-Voltage Shutdown Limit. Subsequent restart will not occur until the input voltage rises again above the Start-Up

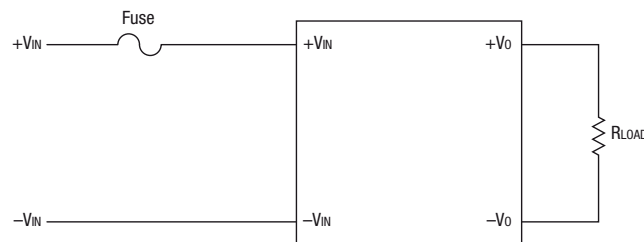


Figure 4. Input Fusing

Threshold. This built-in hysteresis prevents any unstable on/off operation at a single input voltage.

### Start-Up Time

Assuming that the output current is set at the rated maximum, the Vin to Vout Start-Up Time (see Specifications) is the time interval between the point when the rising input voltage crosses the Start-Up Threshold and the fully loaded output voltage enters and remains within its specified accuracy band. Actual measured times will vary with input source impedance, external input capacitance, input voltage slew rate and final value of the input voltage as it appears at the converter.

These converters include a soft start circuit to moderate the duty cycle of its PWM controller at power up, thereby limiting the input inrush current.

The On/Off Remote Control interval from On command to Vout (final  $\pm 5\%$ ) assumes that the converter already has its input voltage stabilized above the Start-Up Threshold before the On command. The interval is measured from the On command until the output enters and remains within its specified accuracy band. The specification assumes that the output is fully loaded at maximum rated current. Similar conditions apply to the On to Vout regulated specification such as external load capacitance and soft start circuitry.

### Recommended Input Filtering

The user must assure that the input source has low AC impedance to provide dynamic stability and that the input supply has little or no inductive content, including long distributed wiring to a remote power supply. The converter will operate with no additional external capacitance if these conditions are met.

For best performance, we recommend installing a low-ESR capacitor immediately adjacent to the converter’s input terminals. The capacitor should be a ceramic type such as the Murata GRM32 series or a polymer type. Make sure that the input terminals do not go below the undervoltage shutdown voltage at all times. More input bulk capacitance may be added in parallel (either electrolytic or tantalum) if needed.

### Recommended Output Filtering

The converter will achieve its rated output ripple and noise with no additional external capacitor. However, the user may install more external output capacitance to reduce the ripple even further or for improved dynamic response. Again, use low-ESR ceramic (Murata GRM32 series) or polymer capacitors. Mount these close to the converter. Measure the output ripple under your load conditions.

Use only as much capacitance as required to achieve your ripple and noise objectives. Excessive capacitance can make step load recovery sluggish or possibly introduce instability. Do not exceed the maximum rated output capacitance listed in the specifications.

### Input Ripple Current and Output Noise

All models in this converter series are tested and specified for input reflected ripple current and output noise using designated external input/output components, circuits and layout as shown in the figures below. The Cbus and Lbus components simulate a typical DC voltage bus.



### Minimum Output Loading Requirements

All models regulate within specification and are stable under no load to full load conditions. Operation under no load might however slightly increase output ripple and noise.

### Thermal Shutdown

To prevent many over temperature problems and damage, these converters include thermal shutdown circuitry. If environmental conditions cause the temperature of the DC/DC's to rise above the Operating Temperature Range up to the shutdown temperature, an on-board electronic temperature sensor will power down the unit. When the temperature decreases below the turn-on threshold, the converter will automatically restart. There is a small amount of hysteresis to prevent rapid on/off cycling.

**CAUTION:** If you operate too close to the thermal limits, the converter may shut down suddenly without warning. Be sure to thoroughly test your application to avoid unplanned thermal shutdown.

### Temperature Derating Curves

The graphs in this data sheet illustrate typical operation under a variety of conditions. The Derating curves show the maximum continuous ambient air temperature and decreasing maximum output current which is acceptable under increasing forced airflow measured in Linear Feet per Minute ("LFM"). Note that these are AVERAGE measurements. The converter will accept brief increases in current or reduced airflow as long as the average is not exceeded.

Note that the temperatures are of the ambient airflow, not the converter itself which is obviously running at higher temperature than the outside air.

Murata Power Solutions makes Characterization measurements in a closed cycle wind tunnel with calibrated airflow. We use both thermocouples and an infrared camera system to observe thermal performance. As a practical matter, it is quite difficult to insert an anemometer to precisely measure airflow in most applications. Sometimes it is possible to estimate the effective airflow if

you thoroughly understand the enclosure geometry, entry/exit orifice areas and the fan flowrate specifications.

**CAUTION:** If you exceed these Derating guidelines, the converter may have an unplanned Over Temperature shut down. Also, these graphs are all collected near Sea Level altitude. Be sure to reduce the derating for higher altitude.

### Output Fusing

The converter is extensively protected against current, voltage and temperature extremes. However your output application circuit may need additional protection. In the extremely unlikely event of output circuit failure, excessive voltage could be applied to your circuit. Consider using an appropriate fuse in series with the output.

### Output Current Limiting

Current limiting inception is defined as the point at which full power falls below the rated tolerance. See the Performance/Functional Specifications. Note particularly that the output current may briefly rise above its rated value in normal operation as long as the average output power is not exceeded. This enhances reliability and continued operation of your application. If the output current is too high, the converter will enter the short circuit condition.

### Output Short Circuit Condition

When a converter is in current-limit mode, the output voltage will drop as the output current demand increases. If the output voltage drops too low (approximately 97% of nominal output voltage for most models), the PWM controller will shut down. Following a time-out period, the PWM will restart, causing the output voltage to begin rising to its appropriate value. If the short-circuit condition persists, another shutdown cycle will initiate. This rapid on/off cycling is called "hiccup mode." The hiccup cycling reduces the average output current, thereby preventing excessive internal temperatures and/or component damage.

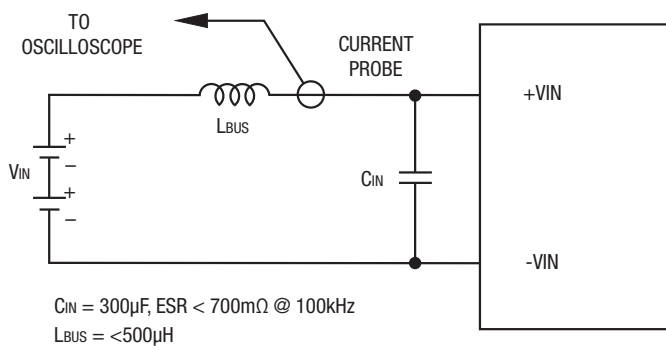


Figure 5. Measuring Input Ripple Current

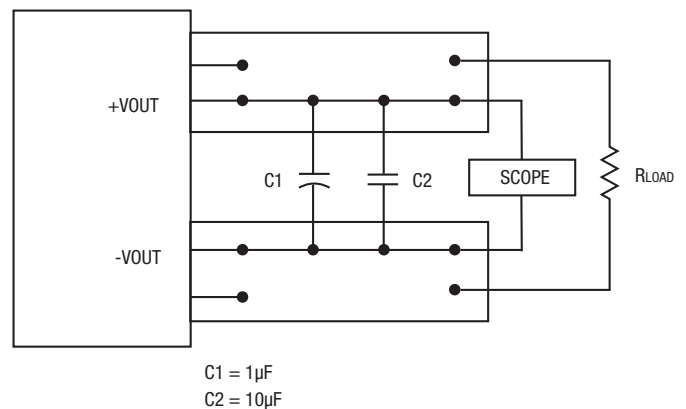


Figure 6. Measuring Output Ripple and Noise (PARD)

The “hiccup” system differs from older latching short circuit systems because you do not have to power down the converter to make it restart. The system will automatically restore operation as soon as the short circuit condition is removed.

#### **Output Capacitive Load**

These converters do not require external capacitance added to achieve rated specifications. Users should only consider adding capacitance to reduce switching noise and/or to handle spike current load steps. Install only enough capacitance to achieve noise objectives. Excess external capacitance may cause degraded transient response and possible oscillation or instability.

NOTICE—Please use only this customer data sheet as product documentation when laying out your printed circuit boards and applying this product into your application. Do NOT use other materials as official documentation such as advertisements, product announcements, or website graphics.

We strive to have all technical data in this customer data sheet highly accurate and complete. This customer data sheet is revision-controlled and dated. The latest customer data sheet revision is normally on our website ([www.murata-ps.com](http://www.murata-ps.com)) for products which are fully released to Manufacturing. Please be especially careful using any data sheets labeled “Preliminary” since data may change without notice.

### Emissions Performance, Model DRQ-8/100-L48NB-C

Murata Power Solutions measures its products for radio frequency emissions against the EN 55022 and CISPR 22 standards. Passive resistance loads are employed and the output is set to the maximum voltage. If you set up your own emissions testing, make sure the output load is rated at continuous power while doing the tests.

The recommended external input and output capacitors (if required) are included. Please refer to the fundamental switching frequency. All of this information is listed in the Product Specifications. An external discrete filter is installed and the circuit diagram is shown below.

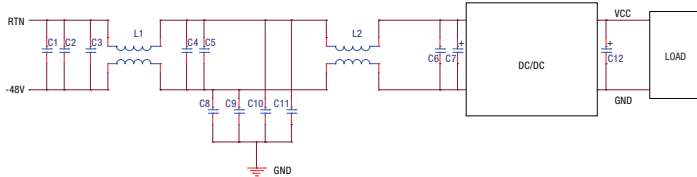


Figure 7. Conducted Emissions Test Circuit


### [1] Conducted Emissions Parts List

Reference	Part Number	Description	Vendor
C1, C2, C3, C4, C5	GRM32ER72A105KA01L	SMD CERAMIC-100V-1000nF-X7R-1210	Murata
C6	GRM319R72A104KA01D	SMD CERAMIC100V-100nF-±10%-X7R-1206	Murata
L1, L2	PG0060T	COMMON MODE-473uH-±25%-14A	Pulse
C8, C9, C10, C11	GRM55DR72J224KW01L	SMD CERAMIC630V-0.22uF-±10%-X7R-2220	Murata
C7	UHE2A221MHD	Aluminum100V-220uF-±10%-long lead	Nichicon
C12	NA		


### [2] Conducted Emissions Test Equipment Used

- Hewlett Packard HP8594L Spectrum Analyzer – S/N 3827A00153
- 2Line V-networks LS1-15V 50Ω/50uH Line Impedance Stabilization Network

### [3] Conducted Emissions Test Results

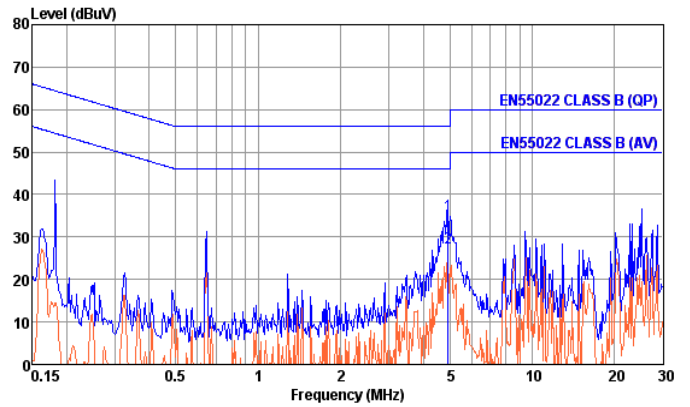

Graph 1. Conducted emissions performance, Positive Line, CISPR 22, Class B, full load

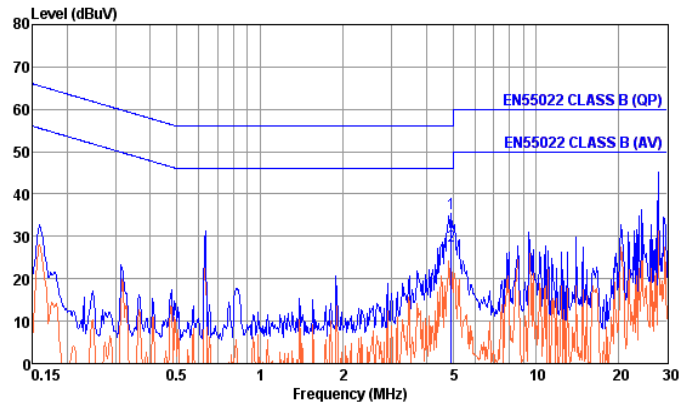

Graph 2. Conducted emissions performance, Negative Line, CISPR 22, Class B, full load

### [4] Layout Recommendations

Most applications can use the filtering which is already installed inside the converter or with the addition of the recommended external capacitors. For greater emissions suppression, consider additional filter components and/or shielding. Emissions performance will depend on the user's PC board layout, the chassis shielding environment and choice of external components. Please refer to Application Note GEAN-02 for further discussion.

Since many factors affect both the amplitude and spectra of emissions, we recommend using an engineer who is experienced at emissions suppression.

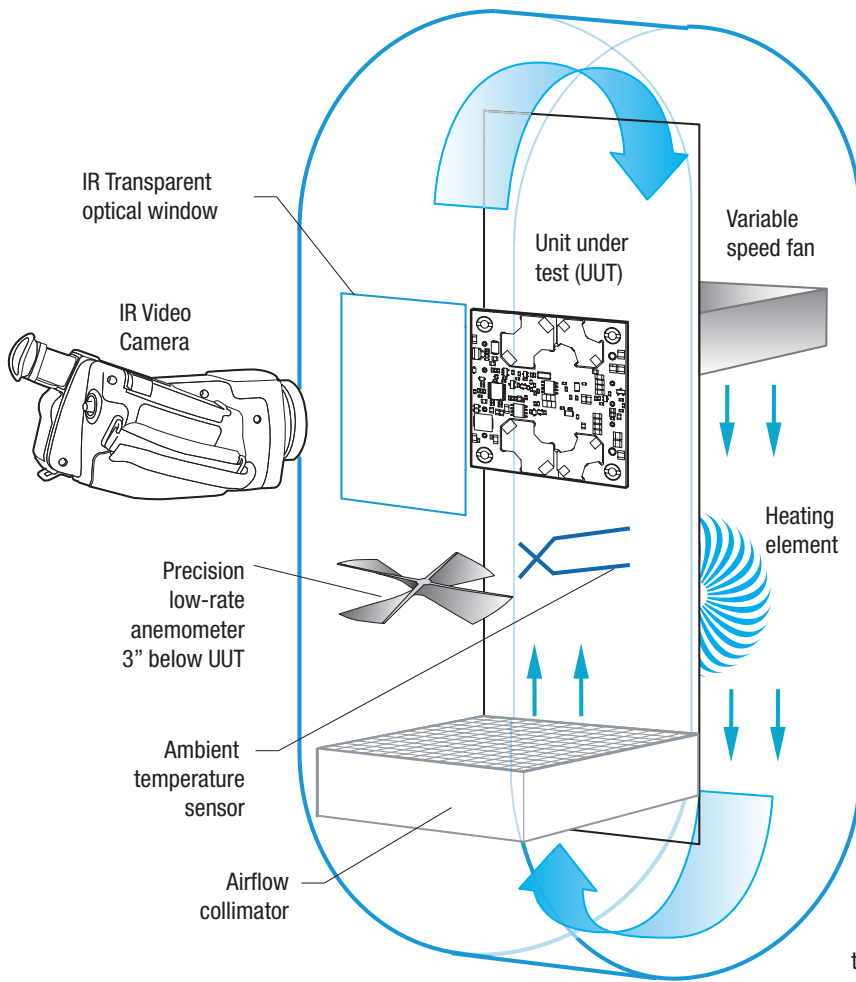


Figure 8. Vertical Wind Tunnel

**Vertical Wind Tunnel**

Murata Power Solutions employs a computer controlled custom-designed closed loop vertical wind tunnel, infrared video camera system, and test instrumentation for accurate airflow and heat dissipation analysis of power products. The system includes a precision low flow-rate anemometer, variable speed fan, power supply input and load controls, temperature gauges, and adjustable heating element.

The IR camera monitors the thermal performance of the Unit Under Test (UUT) under static steady-state conditions. A special optical port is used which is transparent to infrared wavelengths.

Both through-hole and surface mount converters are soldered down to a 10" x 10" host carrier board for realistic heat absorption and spreading. Both longitudinal and transverse airflow studies are possible by rotation of this carrier board since there are often significant differences in the heat dissipation in the two airflow directions. The combination of adjustable airflow, adjustable ambient heat, and adjustable Input/Output currents and voltages mean that a very wide range of measurement conditions can be studied.

The collimator reduces the amount of turbulence adjacent to the UUT by minimizing airflow turbulence. Such turbulence influences the effective heat transfer characteristics and gives false readings. Excess turbulence removes more heat from some surfaces and less heat from others, possibly causing uneven overheating.

Both sides of the UUT are studied since there are different thermal gradients on each side. The adjustable heating element and fan, built-in temperature gauges, and no-contact IR camera mean that power supplies are tested in real-world conditions.

**Soldering Guidelines**

Murata Power Solutions recommends the specifications below when installing these converters. These specifications vary depending on the solder type. Exceeding these specifications may cause damage to the product. Your production environment may differ; therefore please thoroughly review these guidelines with your process engineers.

Wave Solder Operations for through-hole mounted products (THMT)			
For Sn/Ag/Cu based solders:		For Sn/Pb based solders:	
Maximum Preheat Temperature	115° C.	Maximum Preheat Temperature	105° C.
Maximum Pot Temperature	270° C.	Maximum Pot Temperature	250° C.
Maximum Solder Dwell Time	7 seconds	Maximum Solder Dwell Time	6 seconds

Murata Power Solutions, Inc.  
 11 Cabot Boulevard, Mansfield, MA 02048-1151 U.S.A.  
 ISO 9001 and 14001 REGISTERED



**This product is subject to the following operating requirements and the Life and Safety Critical Application Sales Policy: Refer to: <http://www.murata-ps.com/requirements/>**

Murata Power Solutions, Inc. makes no representation that the use of its products in the circuits described herein, or the use of other technical information contained herein, will not infringe upon existing or future patent rights. The descriptions contained herein do not imply the granting of licenses to make, use, or sell equipment constructed in accordance therewith. Specifications are subject to change without notice. © 2017 Murata Power Solutions, Inc.