



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us


Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



10 9 8 7 6 5 4 3 2 1

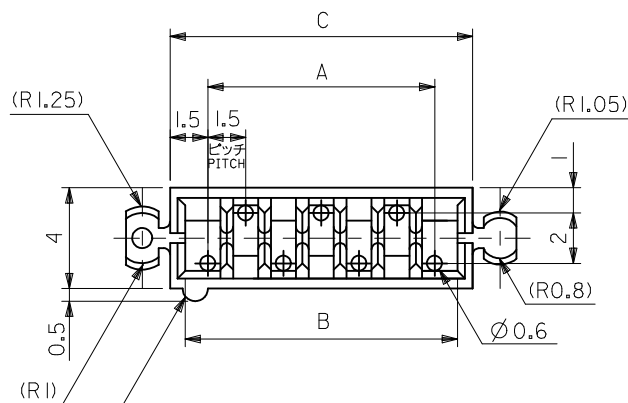

回路NO. 1側
表示用突起
CKT. NO.1
EMBOSSED INDICATION

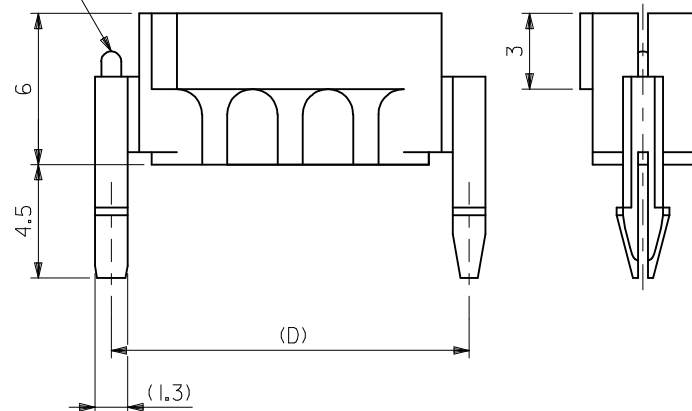


(注記)
(NOTES)

1. 材質:MATERIAL


66ナイロン, UL94V-2
NYLON66, UL94V-2

2. 適用電線: APPLICABLE WIRE

1. 5mmピッチリボンケーブル。
1.5mm PITCH RIBON CABLE
(UL2468, AWG#26 鍍コート線)
(UL2468, AWG26 TIN TOP COAT WIRE)

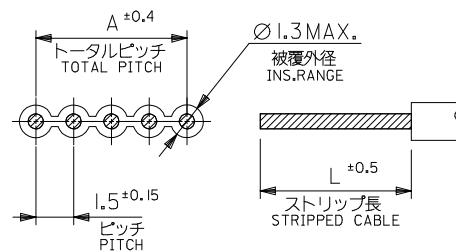


適合電線推奨寸法
APPLICABLE WIRE RECOMMENDED DIM.

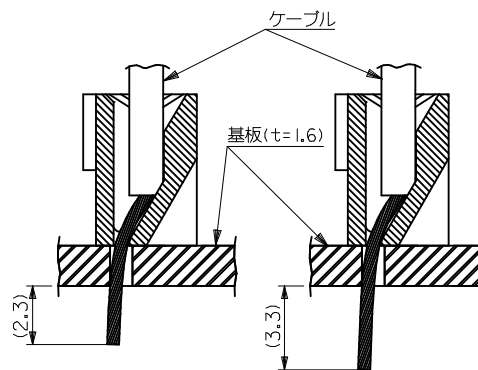

ストリップ長L=6mmの
ケーブルを挿入した場合
L=6mm STRIPPED CABLE
INSERTION FIGURE

ストリップ長L=7mmの
ケーブルを挿入した場合
L=7mm STRIPPED CABLE
INSERTION FIGURE

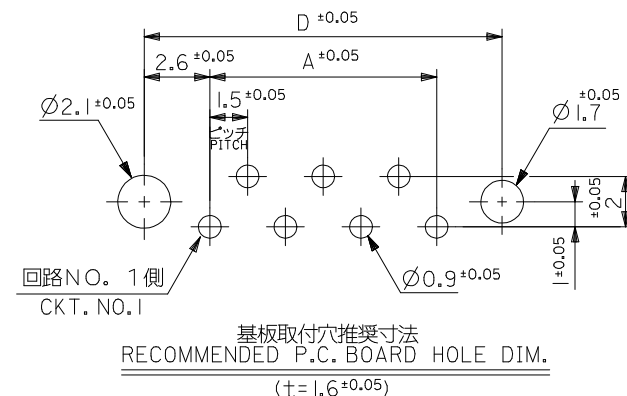

基板取付穴推奨寸法
RECOMMENDED P.C. BOARD HOLE DIM.
(t=1.6 ±0.05)

29.2	27	25.8	24	-1700	17
26.2	24	22.8	21	-1500	15
24.7	22.5	21.3	19.5	-1400	14
23.2	21	19.8	18	-1300	13
21.7	19.5	18.3	16.5	-1200	12
20.2	18	16.8	15	-1100	11
18.7	16.5	15.3	13.5	-1000	10
17.2	15	13.8	12	-0900	9
15.7	13.5	12.3	10.5	-0800	8
14.2	12	10.8	9	-0700	7
12.7	10.5	9.3	7.5	-0600	6
11.2	9	7.8	6	-0500	5
9.7	7.5	6.3	4.5	-0400	4
8.2	6	4.8	3	51016-0300	3
D	C	B	A	PLASTIC BAG	CIRCUIT
				ORDER No. オーダー番号	極数

REVISED EC NO: J2016-0744 2016/01/18 DRWN: QHE31 CHKD: SAKIYAMA APPR: IKANEKO 2016/01/27	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 5:1	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION	
		10 UNDER	±0.2	DRAWN BY C. ARIZONO	DATE '09/03/30	TITLE 1.5MM PITCH CABLE HOLDER(ST.) MOLEX INCORPORATED			
		10 OVER 30 UNDER	±0.25	CHECKED BY T. HARUYAMA	DATE '09/03/30				
		30 OVER	±0.3	APPROVED BY N. UKITA	DATE '09/03/30				
		ANGULAR ±3 °		MATERIAL NO.					DOCUMENT NO.
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE TABLE		SD-51016-001		1 OF 1		
G	REV			SIZE A3	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				

