



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us




Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




DWG. NO.  
SD-52018-003

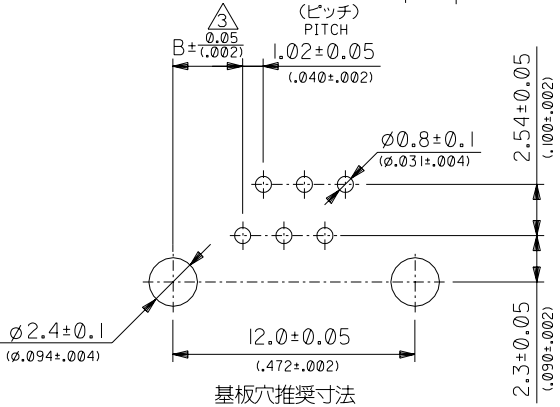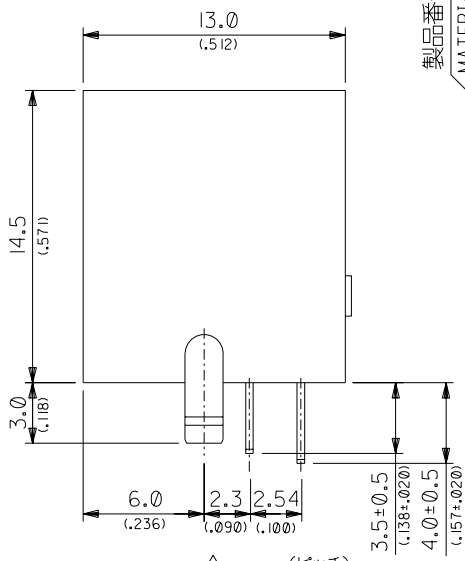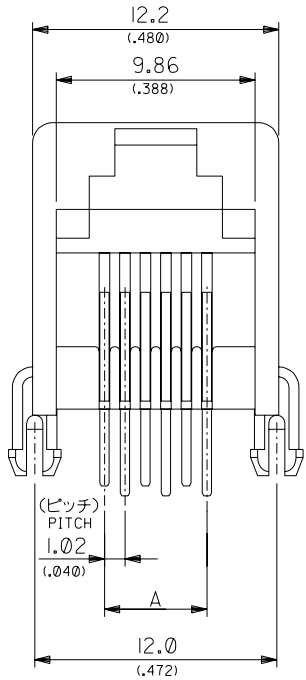

基板穴推奨寸法  
RECOMMENDED P.C.B. LAYOUT  
(ジャック取付け側)  
(JACK ASS'Y SIDE)

製品番号  
MATERIAL NO.  
トレードマーク  
TRADE MARK

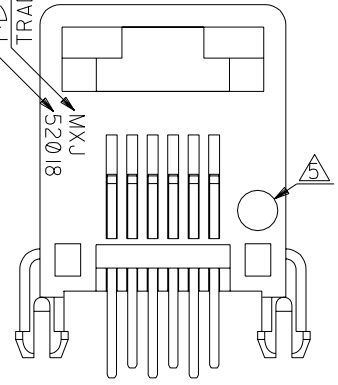

- 注) NOTES
- 材質 MATERIAL  
ハウジング: ガラス入りポリアステル UL94V-0  
HSG.: POLYESTER G.F.15% UL94V-0  
ターミナル: リン青銅  
TERM.: PHOSPHOR BRONZE
  - メッキ仕様 PLATING  
接点部: 金メッキ、表参照  
CONTACT AREA: GOLD PER TABLE  
半田付け部: 錫メッキ 1.0µmMIN.  
SOLDER AREA: TIN 1.0 MICROMETER MINIMUM.  
下地メッキ: ニッケルメッキ 1.0µmMIN.  
UNDERPLATE: NICKEL 1.0 MICROMETER MINIMUM.
  - △ -6.4\*6は両端の基板穴を除く。  
△ -6.2\*6は両端の2つの基板穴を除く。  
DIM B INDICATES FIRST P.C.HOLE  
REQUIRED PER PART NUMBER.  
FOR PARTIALLY LOADED ASSEMBLIES  
P.C.HOLE PATTERN IS REDUCED FROM EACH END.
  - 推奨基板厚: t=1.6±0.05  
RECOMMENDED P.C.B. THICKNESS: 1.6±0.05
  - △ 金メッキ厚標示  
COLOR CODING TO INDICATE GOLD PLATING  
黄色: 0.1µmMIN. YELLOW: 0.1 MICROMETER MINIMUM.  
緑色: 0.38µmMIN. GREEN: 0.38 MICROMETER MINIMUM.  
オレンジ色: 0.76µmMIN. ORANGE: 0.76 MICROMETER MINIMUM.  
無色: 1.27µmMIN. UNMARKED: 1.27 MICROMETER MINIMUM.
  - ハウジングの色は、グレイ。  
HOUSING COLOR IS GRAY.
  - 本製品は52018-6\*\*5の鉛フリー品である。  
THIS PRODUCT IS LEAD FREE OF 52018-6\*\*5.

6	6	5.08 (.200)	3.46 (.136)	1.27 / (50)	52018-6646
				0.76 / (30)	▲ -6636
				0.38 / (15)	-6626
				0.1 / (4)	-6616
6	4	3.05 (.120)	4.48 (.176)	1.27 / (50)	-6446
				0.76 / (30)	-6436
				0.38 / (15)	-6426
				0.1 / (4)	-6416
6	2	1.02 (.040)	5.49 (.216)	1.27 / (50)	-6246
				0.76 / (30)	-6236
				0.38 / (15)	▼ -6226
				0.1 / (4)	52018-6216
ポジション POSITION	極数 CIRCUITS	A	B	金メッキ厚 (µmMIN) GOLD PLATING THK (MIN.)	製品番号 MATERIAL No.

DO NOT SCALE DRAWING

64 NO. DRWN: CH'K: APPR: 63 NO. DRWN: CH'K: APPR: 62 NO. DRWN: CH'K: APPR: 61 NO. DRWN: CH'K: APPR:	新緑作成 RELEASED 60 NO. J2004-4221 DRWN: M.NAGATA '04/05/14 CH'K: K.TOJO '04/05/14 APPR: M.SASAO '04/05/14
DESCRIPTION	MATERIAL 材料 FINISH 仕上げ WIRE RANGE 適用電線範囲 INS. RANGE 被覆外径
REV	注参照 SEE NOTES 注及び表参照 SEE NOTES AND CHART # #

GENERAL TOLERANCES: (UNLESS SPECIFIED) 一般公差	SCALE 4:1	DESIGN UNITS <input checked="" type="checkbox"/> mm <input type="checkbox"/> INCH	PROJECTION <input checked="" type="checkbox"/> FIRST ANGLE <input type="checkbox"/> THIRD ANGLE	DIMENSIONS: <input type="checkbox"/> mm <input type="checkbox"/> INCH <input checked="" type="checkbox"/> mm ONLY	SHT REV	
10 UNDER 未満	±0.2 (0.08)	DRAWN BY & DATE M.NAGATA '04/05/14		TITLE: MODULAR JACK HOUSING ASS'Y -LEAD FREE-	MATERIAL NO. SD-52018-003	
10 OVER 30 UNDER 未満	±0.25 (0.01)	CHECKED BY & DATE K.TOJO '04/05/14				DRAWING NO. SD-52018-003
30 OVER 以上	±0.3 (0.01)	APPROVED BY & DATE M.SASAO '04/05/14				
ANGLE 角度	±3°	CAD FILENAME SD-52018-003.S01		MATERIAL NO. SEE CHART		

2888 DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.		SIZE B
---	--	--------