



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0528852074](#)
Status: **Active**
Overview: SlimStack™ 0.635mm Pitch Board-to-Board Connectors
Description: 0.635mm Pitch SlimStack™ Receptacle, Surface Mount, Dual Row, Vertical Stacking, 6.00 to 10.00mm Stacking Heights, Embossed Tape with Cover Packaging, 200 Circuits

Documents:

3D Model	Product Specification PS-52760-015-001 (PDF)
Drawing (PDF)	Packaging Specification SPK-52885-003-001 (PDF)
Product Specification 527600000-000 (PDF)	RoHS Certificate of Compliance (PDF)

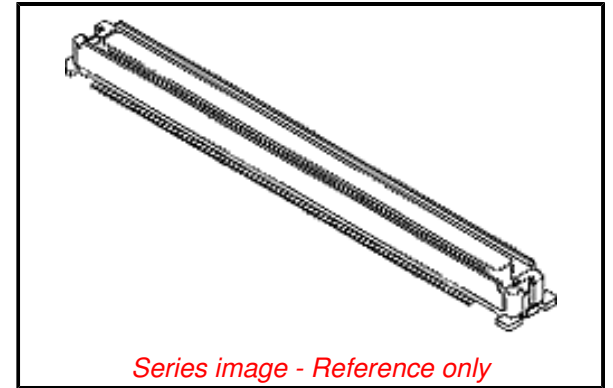

Agency Certification

UL E29179

General

Product Family	PCB Receptacles
Series	52885
Application	Board-to-Board, Signal
Comments	Stacking-Type
Overview	SlimStack™ 0.635mm Pitch Board-to-Board Connectors
Product Name	SlimStack™
UPC	884982494251

Physical

Circuits (Loaded)	200
Circuits (maximum)	200
Color - Resin	Natural
Durability (mating cycles max)	50
Flammability	94V-0
Glow-Wire Compliant	No
Mated Height	10.00mm, 5.00mm, 6.00mm, 7.00mm, 8.00mm, 9.00mm
Material - Metal	Phosphor Bronze
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Material - Resin	High Temperature Thermoplastic
Net Weight	2182.541/mg
Number of Rows	2
Orientation	Vertical
PCB Locator	Yes
PCB Retention	Yes
PCB Thickness - Recommended	1.60mm
Packaging Type	Embossed Tape on Reel
Pitch - Mating Interface	0.64mm
Plating min - Mating	0.254µm
Plating min - Termination	2.032µm
Polarized to PCB	Yes
Robotic Placement	Pick and Place Cap
Surface Mount Compatible (SMC)	N/A
Temperature Range - Operating	-55°C to +105°C
Termination Interface: Style	Surface Mount

Electrical

Current - Maximum per Contact	0.5A
Voltage - Maximum	100V

Material Info

EU ELV

Not Relevant

EU RoHS

Compliant
REACH SVHC

Not Contained Per
-ED/01/2017 (12
January 2017)

Halogen-Free

Status

Low-Halogen

Need more information on product environmental compliance?

Email productcompliance@molex.com
Please visit the [Contact Us](#) section for any non-product compliance questions.

China ROHS	Green Image
ELV	Not Relevant
RoHS Phthalates	Not Contained

Search Parts in this Series

[52885](#) Series

Mates With

[55091](#) , [53649](#) , [53643](#) , [53475](#) , [53627](#) ,
[53553](#) , [53552](#) , [53647](#) , [53551](#) , [53481](#) ,
[53625](#)

Reference - Drawing Numbers

Packaging Specification

Product Specification

Sales Drawing

SPK-52885-003-001

527600000-000, PS-52760-015-001

SD-52885-003, SD-52885-004

This document was generated on 03/17/2017

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION