



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



To _____

No. A226-040403B-01

Date 3rd Apr. '04

Type No.
GRAB4

Data Sheet

GPS Rx SAW Filter	
Application	: Rx Filter for GPS
Center Frequency	: 1575.42MHz
Size	: 2.0x1.4mm, 5pin-layout
Impedance	: 50-100ohms unbalance-balance
Part No.	: EFCH1575TCA1

Issued *Y. Watanabe*

Check *K. Nishimura*

CIRCUIT COMPONENTS BUSINESS UNIT

MATSUSHITA ELECTRONIC COMPONENTS CO.,LTD

KADOMA, OSAKA, JAPAN



GPS RF SAW Filter, 1575.42MHz
Design NO. dubw027
== Preliminary Specification ==

Parameter		Frequency (MHz)	Your requirements			Our puropusal			Unit
			Min.	Typ.	Max.	Min.	Typ.	Max.	
Center Frequency (fo)				1575			1575.4		
Insertion Loss		1575.42 MHz			1.8		1.1	1.5	dB
Pass band ripple		1574.42 to 1576.42MHz			0.7		0.1	0.3	dBpp
Attenuation	Att1	<1475MHz	30			35	42		dB
	Att2	1475 to 1525MHz	10			20	25		
	Att3	1625 to 1675MHz	10			20	27		
	Att4	1675 to 3155MHz	30			30	35		
	Att5	>3155MHz	20			30	43		
Mean Square Phase Error		1574.42 to 1576.42MHz			1		0.4	0.8	°rms
Phase Imbalance					+/-20	-20	5	20	Degree
Amplitude Imbalance					+/-2	-2	0.8	2	dB
In/Out VSWR		1574.42-1576.42		1.1	1.5		1.1	1.5	
Terminate impedance(in)		Single-ended	50			50			ohm
(out)		Differential	100			100			ohm
Operating Temperature			-30	25	85	-30	25	85	°C

a value which pulled JIG Loss:0. 2dB.


GPS Rx SAW Filter

Design No dubw027

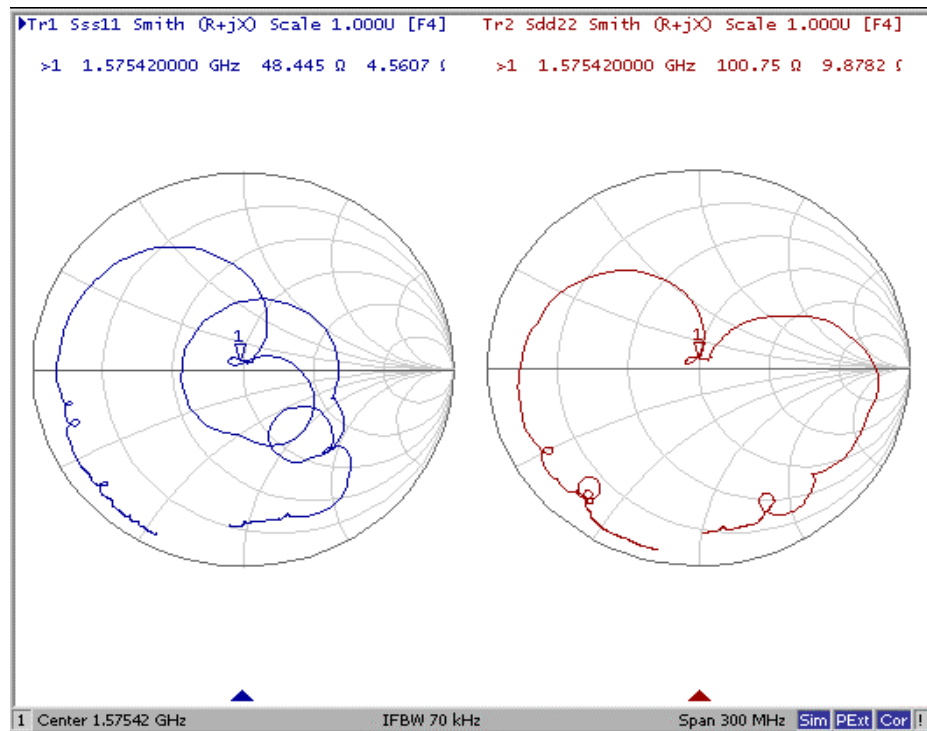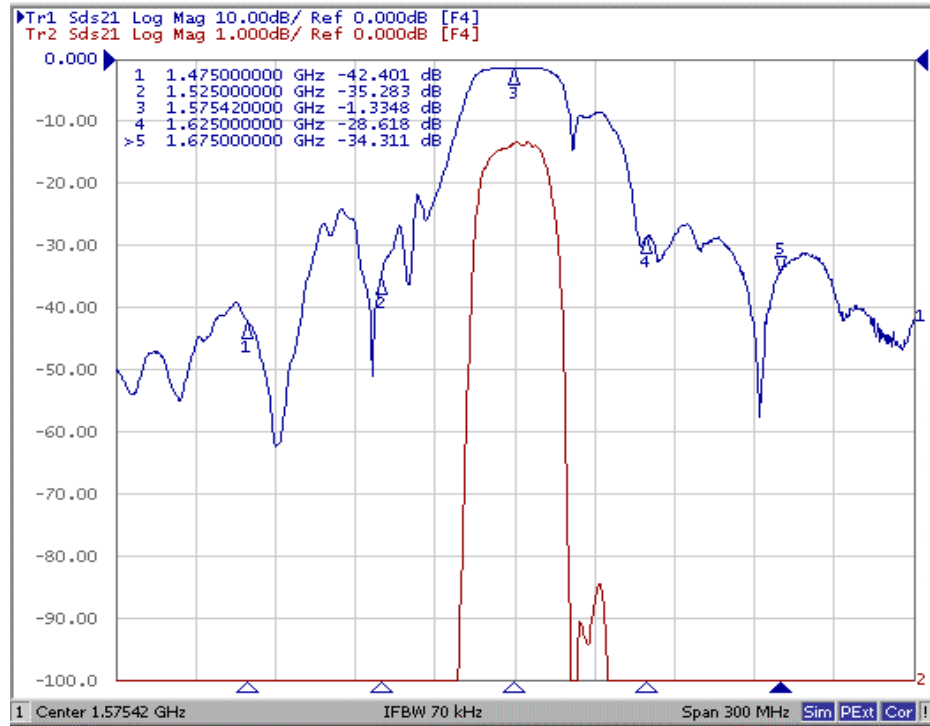



GPS Rx SAW Filter

Design No dubw027

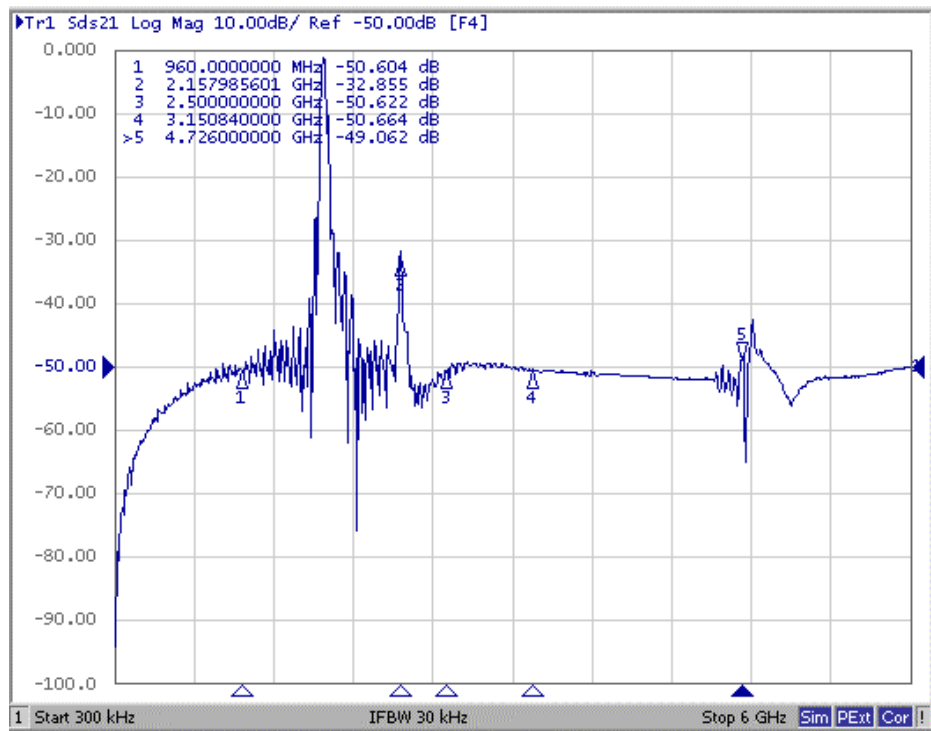

GPS Rx SAW Filter


Design No dubw027

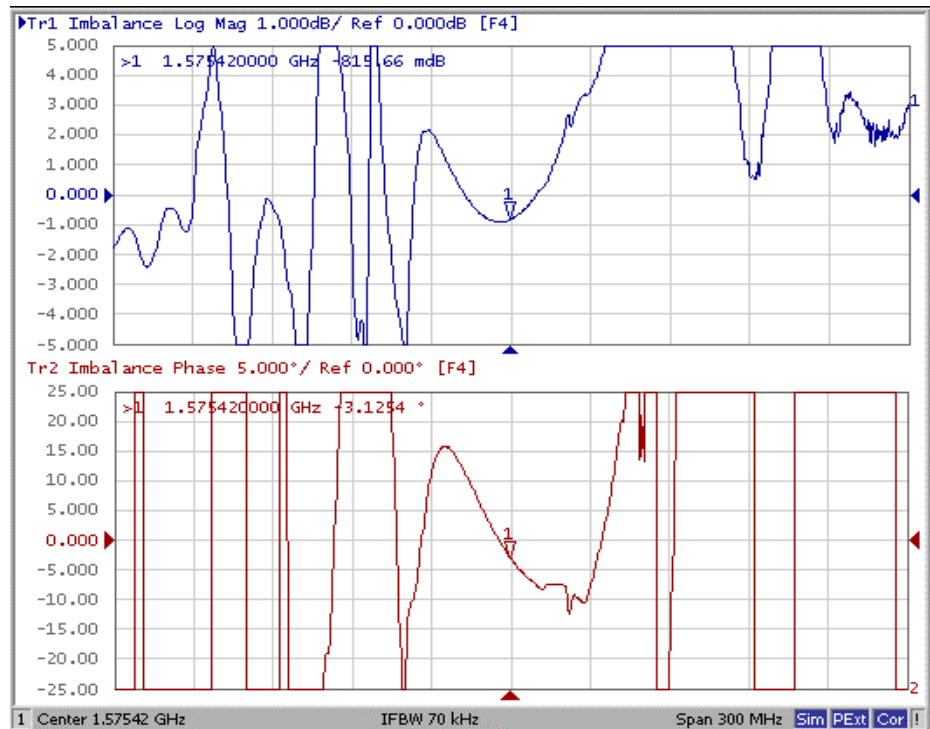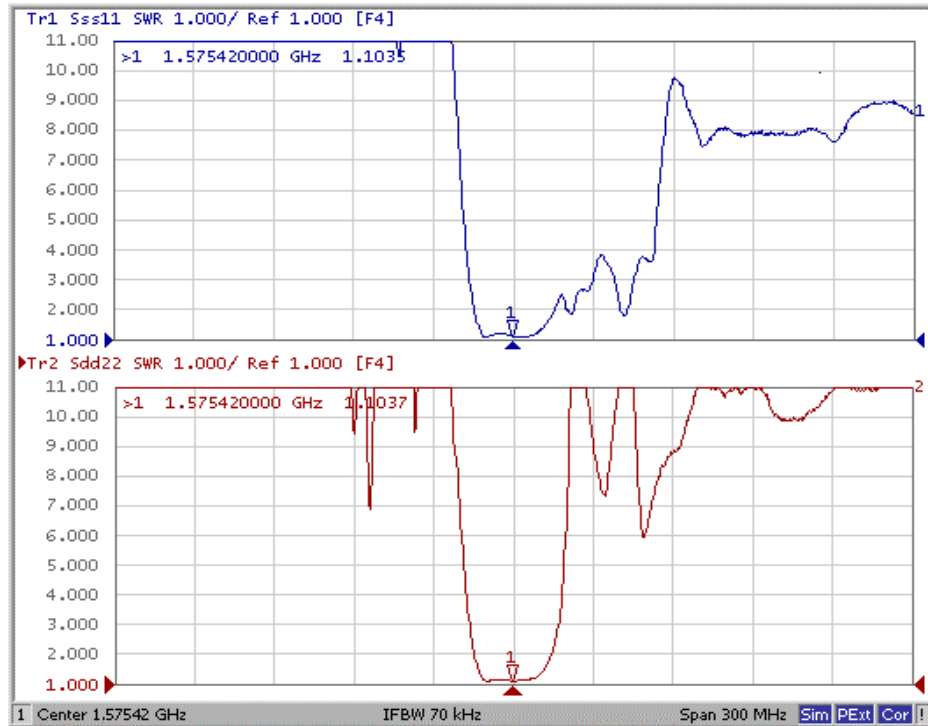

THIRD ANGLE PROJECTION

Tolerance : +/-0.05



Under Development

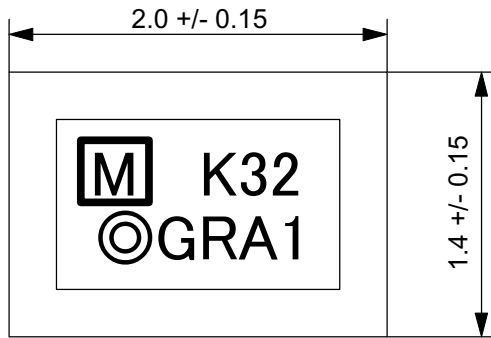

Marking

$\frac{K\ 3\ 2}{\textcircled{3}\ \textcircled{2}}$
 $\frac{GRA1}{\textcircled{1}}$

- ①: Type Symbol
- ②: Date Code
3_YEAR
2_MONTH
- ③: Factory Copde
(Show the production place as below)
K:MACO

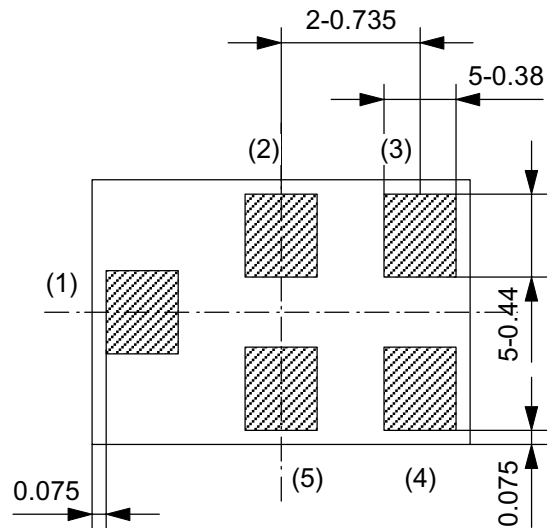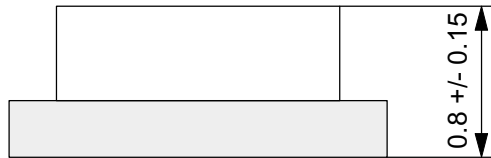

- (1) Input
- (2) GND
- (3) Output
- (4) Output
- (5) GND

Note :
The design manufacturing process,
and Specification of this device
are subject to change without
notice.

UNLESS OTHERWISE SPECIFIED		
BASIC DIMENSIONS		TOLERANCE
UP TO	INCL	
TO	INCL	
TO	INCL	
TO	INCL	
ABOVE		

--	--	--

ISSUE	REVISIONS	DATE
MATERIAL	FINISH	SCALE
DESIGN		
DRAW		
CHECK		
APPROVAL		
DRAWING NO.		

NAME	TYPE NO.
SAW Filter	

**CERAMIC BUSINESS UNIT, LCR DEVICE COMPANY
MATSUSHITA ELECTRONIC COMPONENTS CO.,LTD.
KADOMA, OSAKA, JAPAN**

DO NOT SCALE DRAWING

REVISIONS INDICATED BY Æ

ALL DIMENSIONS ARE IN MILLIMETERS

