



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




Technical Data Sheet

Rosenberger

Adaptor
RPC-N 50 Ω Jack – RPC-SL Plug

05K1P4-S0AS3

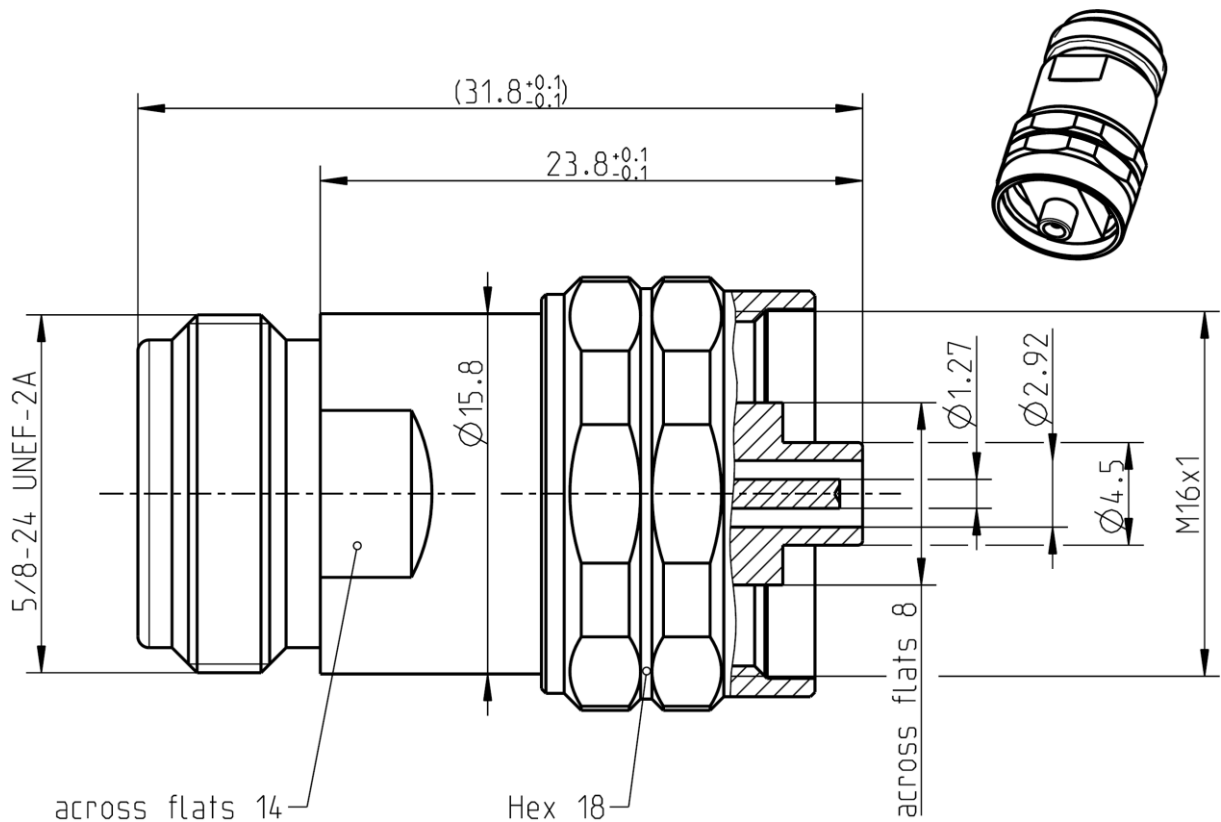

All dimensions are in mm; tolerances according to ISO 2768 m-H

Interface

RPC-N according to
RPC-SL

IEC 61169-16 ; CECC 22 210 ; MIL-STD 348A/402
Interchangeable port connector system

Documents

N/A

Material and plating

Connector parts

Center contact
Outer contact RPC-N
Outer contact RPC-SL
Coupling nut
Dielectric

Material

CuBe
Stainless steel
Stainless steel
Stainless steel
PPE

Plating

Gold, min. 1.27 µm, over chemical nickel
Passivated
Gold, 0.1 µm min.
Passivated

RF_35/05.10/6.1
Dieses Dokument ist urheberrechtlich geschützt • This document is protected by copyright • Rosenberger Hochfrequenztechnik GmbH & Co. KG

Technical Data Sheet				Rosenberger			
Adaptor RPC-N 50 Ω Jack – RPC-SL Plug				05K1P4-S0AS3			
Electrical data							
Impedance		50 Ω					
Frequency		DC to 18 GHz					
Return loss		≥ 21 dB, DC to 18 GHz					
Insertion loss		≤ 0.05 x √f(GHz) dB					
Insulation resistance		≥ 5 GΩ					
Center contact resistance RPC-N		≤ 1.0 mΩ					
Outer contact resistance RPC-N		≤ 1.0 mΩ					
Center contact resistance RPC-SL		≤ 3.0 mΩ					
Outer contact resistance RPC-SL		≤ 2.0 mΩ					
Test voltage		750 V rms					
Working voltage		250 V rms					
RF-leakage		≥ 90 dB up to 1 GHz					
Mechanical data							
Mating cycles RPC-N		≥ 500					
Mating cycles RPC-SL		≥ 3000					
Center contact captivation		≥ 28 N					
Coupling test torque RPC-N		1.70 Nm					
Recommended torque RPC-N		0.70 Nm to 1.10 Nm					
Recommended torque RPC-SL		2 Nm					
Environmental data							
Temperature range		-40°C to +85°C					
Thermal shock		IEC 61169-1, Subclause 9.4.4					
Corrosion		IEC 61169-1, Subclause 9.4.6					
Vibration		IEC 61169-1, Subclause 9.3.3					
Shock		IEC 61169-1, Subclause 9.3.14					
Moisture resistance		IEC 61169-1, Subclause 9.4.3					
RoHS		compliant					
Tooling							
		N/A					
Suitable cables							
		N/A					
Packing							
Standard		1 pce in box					
Weight		34.1 g/pce					
While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.							
Draft	Date	Approved	Date	Rev.	Engineering change number	Name	Date
Scherbauer M.	05.12.14	Herbert Babinger	01.08.17	300	17-v521	Frank Tatzel	01.08.17
Rosenberger Hochfrequenztechnik GmbH & Co. KG P.O.Box 1260 D-84526 Tittmoning Germany www.rosenberger.de				Tel. : +49 8684 18-0 Email : info@rosenberger.de			Page 2 / 2