



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!




Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



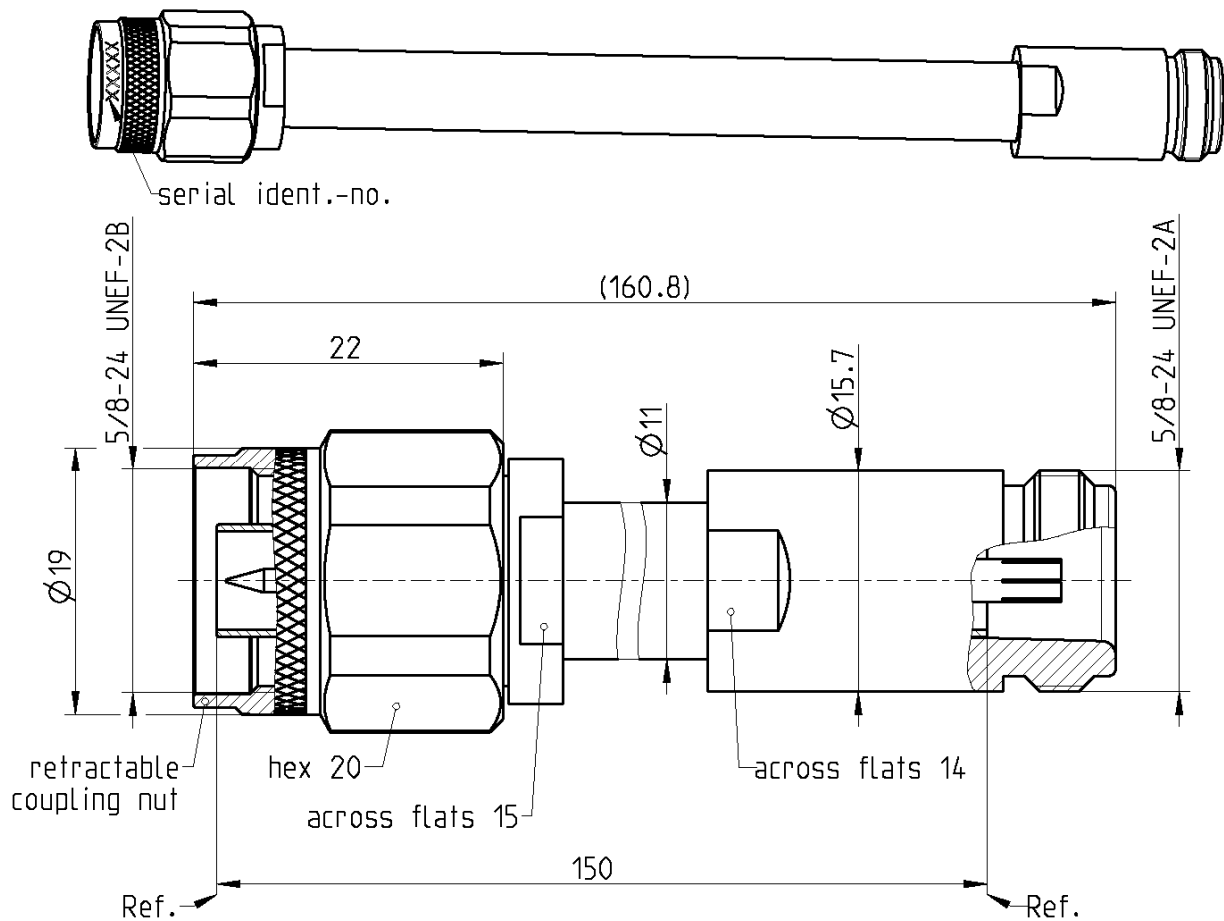

All dimensions are in mm; tolerances according to ISO 2768 m-H

Interface

According to

IEC 61169-16

Documents

Application note

AN001 "Calibration Services"

Material and plating

Connector parts

Center conductor

Outer conductor

Coupling nut

Material

CuBe

Brass

Stainless steel

Plating

Gold, min. 1.27 μm , over chemical nickel

Gold, min. 1.27 μm , over chemical nickel

Passivated

Electrical data

Insertion loss ≤ 0.25 dB at 18 GHz

Mechanical data

Mating cycles ≥ 500
 Maximum torque 1.70 Nm
 Recommended torque 1.10 Nm
 Airline dimensions at 23 °C:
 - Diameter outer conductor 7.000 mm \pm 0.005 mm
 - Diameter inner conductor 3.040 mm \pm 0.005 mm
 - Length outer conductor 150.00 mm \pm 0.02 mm
 - Length inner conductor 150.00 mm \pm 0.02 mm
 - Length difference ≤ 0.04 mm
 (outer conductor – inner conductor)

Calculated data (non warranted)

Lossless characteristic impedance¹ 50 Ω \pm 0.15 Ω
 Return loss² ≥ 40 dB, 0.3 GHz to 4 GHz
 ≥ 38 dB, 4 GHz to 8 GHz
 ≥ 35 dB, 8 GHz to 18 GHz

1. The lossless characteristic impedance is calculated from the specified diameters of the inner and outer conductor.
2. The return loss is calculated from the characteristic impedance, the skin depth and the connector interface.

General standard definitions

For proper work the vector network analyzer (VNA) used needs a model describing the electrical behaviour of this calibration standard. Depending on the VNA type different models, units and terms are used and have to be entered into the VNA. All values are based on typical geometry and plating.

- Offset Z_0 / Impedance / Z_0 50 Ω
 - Offset Delay 500.542 ps
 - Length (electrical) / Offset Length 150.059 mm
 - Offset Loss 0.80 GΩ/s
 - Loss 0.035 dB/ $\sqrt{\text{GHz}}$

Environmental data

Operating temperature range³ +20 °C to +26 °C
 Storage temperature range 0 °C to +50 °C
 RoHS compliant

3. This range is a recommendation. However, the airline can be used in a wider range. Any temperature change from 23 °C results in dimensional changes.

Dieses Dokument ist urheberrechtlich geschützt • This document is protected by copyright • Rosenberger Hochfrequenztechnik GmbH & Co. KG
RF_35/09.14/6.2

Technical Data Sheet				Rosenberger											
RPC-N 50 Ω		Airline Plug / Jack		05S101-K150											
<div>Declaration of calibration options</div> <div>Factory Calibration</div> <div>Standard delivery for this calibration standard includes a Factory Calibration. The Calibration Certificate issued reports individual mechanical calibration results, traceable to national / international standards. Model based standard definitions are reported in an Agilent/Keysight, Rohde & Schwarz and Anritsu compatible VNA format.</div> <div>Accredited Calibration</div> <div>Not available.</div> <div>For further, more detailed information see application note AN001 on the Rosenberger homepage.</div> <div>Calibration interval</div> <div>Recommendation12 months</div> <div>Packing</div> <div>Standard1 pce in box</div> <div>Weight130 g/pce</div> <div>Center conductorloose in an acrylic glass tube</div>															
<div>While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.</div>															
Draft		Date		Rev.		Engineering change number		Name		Date					
Herbert Babinger		07.03.05		Martin Moder		29.01.15		e00		14-1492		Herbert Babinger		29.01.15	
Rosenberger Hochfrequenztechnik GmbH & Co. KG P.O.Box 1260 D-84526 Tittmoning Germany www.rosenberger.de								Tel. : +49 8684 18-0 Email : info@rosenberger.de				Page 3 / 3			