

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China









# PRODUCT DATASHEET Barbara series

last update 3/4/2017

#### **DETAILS**

Product Number F15402\_BARBARA-G2-S

FamilyBarbaraTypeReflectorColormetalDiameter70 mmHeight41,9 mmStyleroundOptic MaterialPC

**Holder Material** 

Fastening socket

Status production ready


ROHS Comliant Yes


Date Updated 3/04/2017

### **OPTICAL PROPERTIES**


	Viewing	Light	Effi-
LED	Angle	Beam	ciency cd/lm Connector
CLL02x/CLU02x (LES10)	sim: 13	Spot	sim: 88 % sim: 7.900 LEDiL: F15255_HEKLA-SOCKET-C
CXA/B 15xx	sim: 10	Spot	sim: 91 % sim: 15.800 LEDiL: F15256_HEKLA-SOCKET-D
SLE G6 LES15	sim: 17	Spot	sim: 89 % sim: 5.300 LEDiL: F15859_HEKLA-SOCKET-I
SLE G6 LES17	sim: 20	Spot	sim: 89 % sim: 4.150 LEDiL: F15859_HEKLA-SOCKET-I



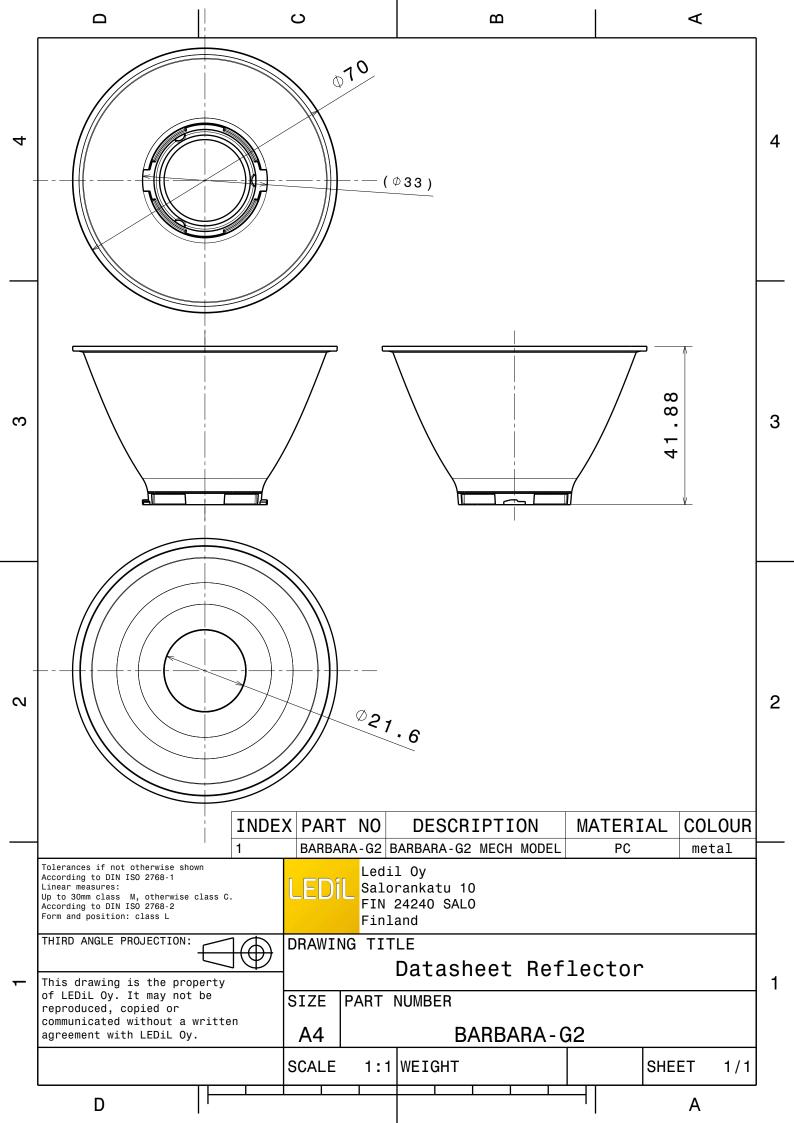


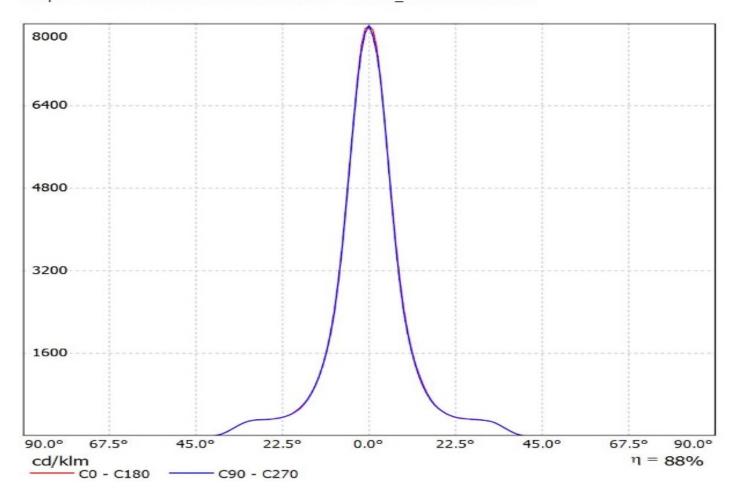


Luminaire: Ledil Oy PRELIMINARY\_F15402\_BARBARA-G2-S\_+\_F15859\_HEKLA-SOCKET-I\_ (SLE\_G6\_LES15)\_SIMULATED Lamps: 1 x Tridonic SLE G6 LES15 + F15859\_HEKLA-SOCKET-I

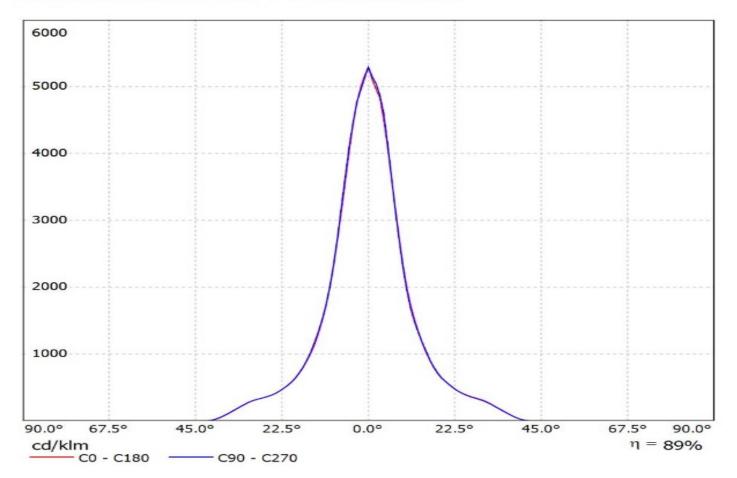

Luminaire: Ledil Oy F15402\_BARBARA-G2-S\_+\_F15859\_HEKLA-SOCKET-I\_TRIDONIC\_SLE\_G6\_LES17\_SIMULATED Lamps: 1 x TRIDONIC SLE G6 LES17

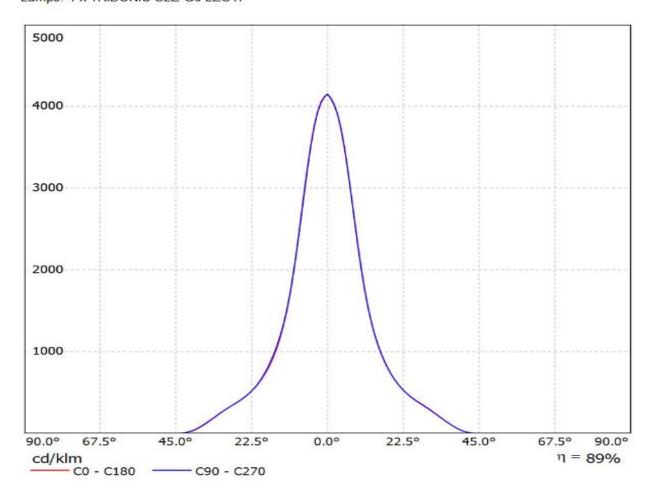


Luminaire: Ledil Oy F15402\_BARBARA-G2-S\_+\_F15255\_HEKLA-SOCKET-C\_(CLU028)\_SIMULATED Lamps: 1 x Citizen CLU028-1204C4-303M2K1 + F15255\_HEKLA-SOCKET-C

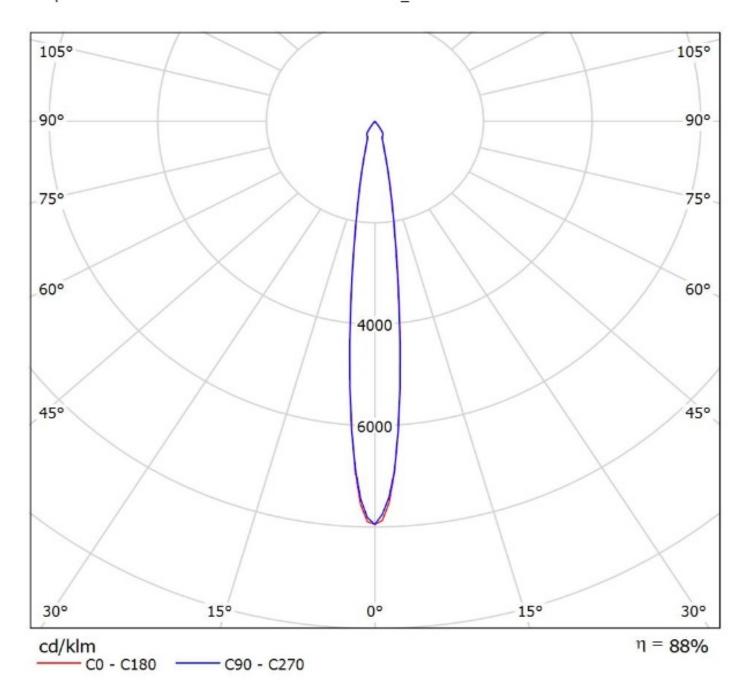


Luminaire: Ledil Oy PRELIMINARY\_F15402\_BARBARA-G2-S\_+\_F15859\_HEKLA-SOCKET-I\_

(SLE\_G6\_LES15)\_SIMULATED

Lamps: 1 x Tridonic SLE G6 LES15 + F15859\_HEKLA-SOCKET-I

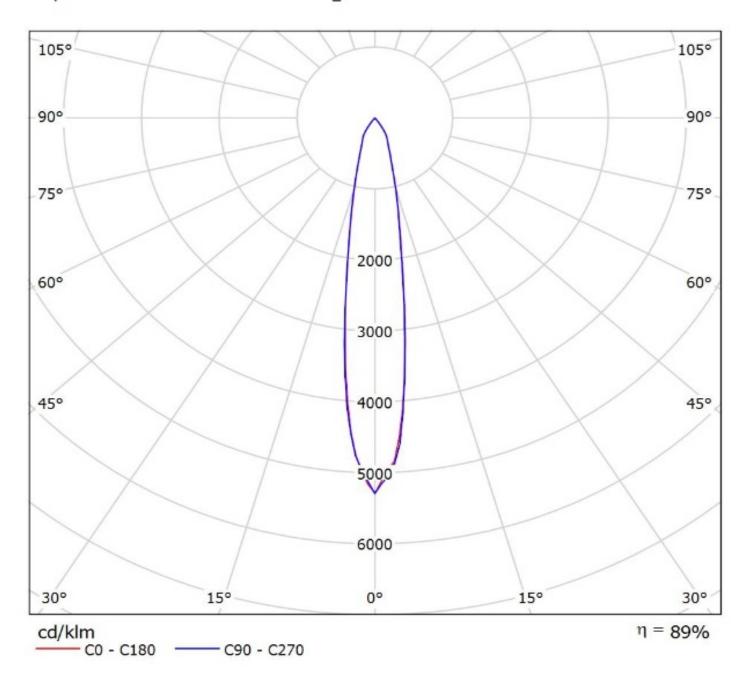

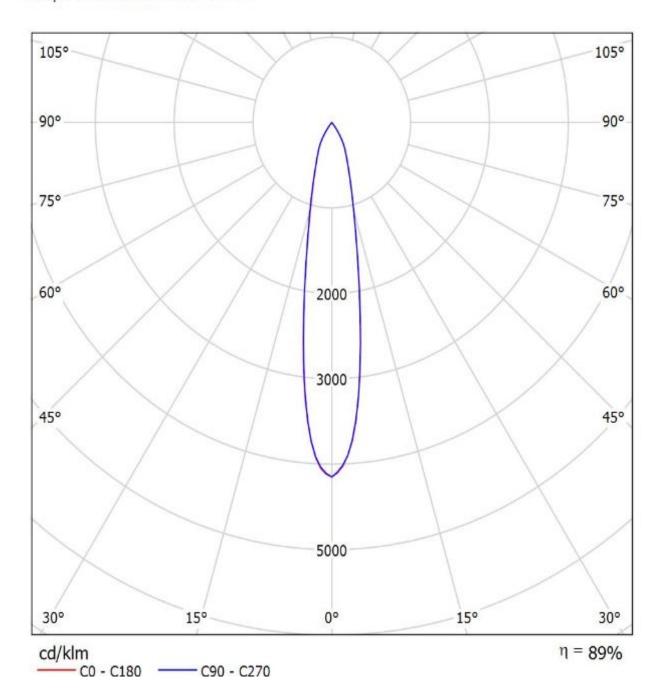

NOTE: The typical divergence will be changed by different color, chip size and chip position tolerance. The typical total divergence is the full angle measured where the luminous intensity is half of the peak value.

#### **GENERAL INFORMATION**

- Product series especially designed & optimized for series of LEDs.
- Special care taken to make light distribution as uniform as possible.

Note! Due to use of high power COB's with this product, special attention to proper thermal design is highly recommended. LEDiL has no liability for direct, indirect or consecutive damages arising from the LEDiL products being used outside of the recommended temperature range.