



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





FineAdjust Applicator Specification Sheet Order No. 63901-5300

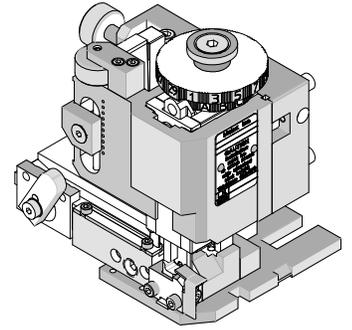

FEATURES

- Quick punch removal with the push of a button for fast and easy tooling change
- Applicator designed to industry standard mounting and shut height 135.80mm (5.346")
- Quick set-up time; plus the crimp height, track and feed adjustments can be set without removing the applicator from the press
- Fine adjustment allows users to achieve target with little effort by adjusting in increments of .015mm (.0006") for conductor crimp height and .063mm (.0025") for insulation height
- Independent adjustment rings allow users to quickly adjust the conductor or insulation crimp height without affecting each other
- Directly adapts to most automatic wire processing machines

SCOPE


Products: Mini-Fit Jr.™, Mini-Fit HCS™, and Mini-Fit Plus HCS™ Crimp Terminal 16 AWG with smaller insulation OD's.

| Terminal Series No. | Terminal Order No. | | Wire Size | | Insulation Diameter | | | | Strip Length | |
|---------------------|--------------------|------------|-----------|------|---------------------|-----------|--------------|-----------|--------------|-----------|
| | | | | | IPC/WHMA-A620 ♦ | | Terminal ♦ ♦ | | | |
| | | | | | mm | In. | mm | In. | | |
| 5556 | 39-00-0077 | 39-00-0173 | 16 | 1.31 | 1.80-2.20 | .071-.087 | 1.80-3.10 | .071-.122 | 3.00-3.50 | .118-.138 |
| | 39-00-0079 | 39-00-0179 | | | | | | | | |
| | 39-00-0089 | 39-00-0185 | | | | | | | | |
| | 39-00-0093 | 39-00-0198 | | | | | | | | |
| | 39-00-0112 | 39-00-0204 | | | | | | | | |
| | 39-00-0118 | 39-00-0211 | | | | | | | | |
| | 39-00-0141 | 39-00-0217 | | | | | | | | |
| | 39-00-0157 | 39-00-0447 | | | | | | | | |
| | 39-00-0167 | | | | | | | | | |
| 5558 | 39-00-0081 | 39-00-0147 | 16 | 1.31 | 1.80-2.20 | .071-.087 | 1.80-3.10 | .071-.122 | 3.00-3.50 | .118-.138 |
| | 39-00-0083 | 39-00-0223 | | | | | | | | |
| | 39-00-0095 | 39-00-0449 | | | | | | | | |
| | 39-00-0099 | 40-01-0855 | | | | | | | | |
| | 39-00-0124 | 98-00-0176 | | | | | | | | |
| | 39-00-0130 | | | | | | | | | |
| 44476 | 44476-3111 | 44476-3211 | 16 | 1.31 | 1.80-2.20 | .071-.087 | 1.80-3.10 | .071-.122 | 3.00-3.50 | .118-.138 |
| 44478 | 44478-3111 | 44478-3211 | 16 | 1.31 | 1.80-2.20 | .071-.087 | 1.80-3.10 | .071-.122 | 3.00-3.50 | .118-.138 |
| 44485 | 44485-3211 | 44485-3411 | 16 | 1.31 | 1.80-2.20 | .071-.087 | 1.80-3.10 | .071-.122 | 3.00-3.50 | .118-.138 |
| | 44485-3311 | | | | | | | | | |
| 45750 | 45750-3111 | 45750-3211 | 16 | 1.31 | 1.80-2.20 | .071-.087 | 1.80-3.15 | .071-.124 | 3.00-3.50 | .118-.138 |
| 46012 | 46012-3111 | 46012-3211 | 16 | 1.31 | 1.80-2.20 | .071-.087 | 1.80-3.10 | .071-.122 | 3.00-3.50 | .118-.138 |
| | 46012-3141 | 46012-3241 | | | | | | | | |
| 46018 | 46018-3541 | | 16 | 1.31 | 1.80-2.20 | .071-.087 | 1.80-3.10 | .071-.122 | 3.00-3.50 | .118-.138 |
| 46083 | 46083-3111 | 46083-3211 | 16 | 1.31 | 1.80-2.20 | .071-.087 | 1.80-3.10 | .071-.122 | 3.00-3.50 | .118-.138 |
| | 46083-3121 | 46083-3221 | | | | | | | | |
| 46098 | 46098-3541 | | 16 | 1.31 | 1.80-2.20 | .071-.087 | 1.80-3.10 | .071-.122 | 3.00-3.50 | .118-.138 |

| Terminal Series No. | Terminal Order No. | | Wire Size | | Insulation Diameter | | | | Strip Length | |
|---------------------|--------------------|------------|-----------|------|---------------------|-----------------|-------------|-----------|--------------|-----------|
| | | | | | IPC/WHMA-A620 ♦ | | Terminal ♦♦ | | | |
| | | | | | AWG | mm ² | mm | In. | | |
| 46134 | 46134-3111 | 46134-3121 | 16 | 1.31 | 1.80-2.20 | .071-.087 | 1.80-3.10 | .071-.122 | 3.00-3.50 | .118-.138 |
| | 46134-3211 | 46134-3221 | | | | | | | | |

♦ To achieve optimum IPC-A620 insulation crimps, use this insulation OD range.
 ♦♦ Overall insulation OD specification for terminal.
 Applicator 63900-2800 should be used for insulation O.D. 2.60-3.15mm (example UL1015).
 Applicator 63900-3000 should be used for insulation O.D. 2.20-2.45mm (example UL1007).

DEFINITION OF TERMS

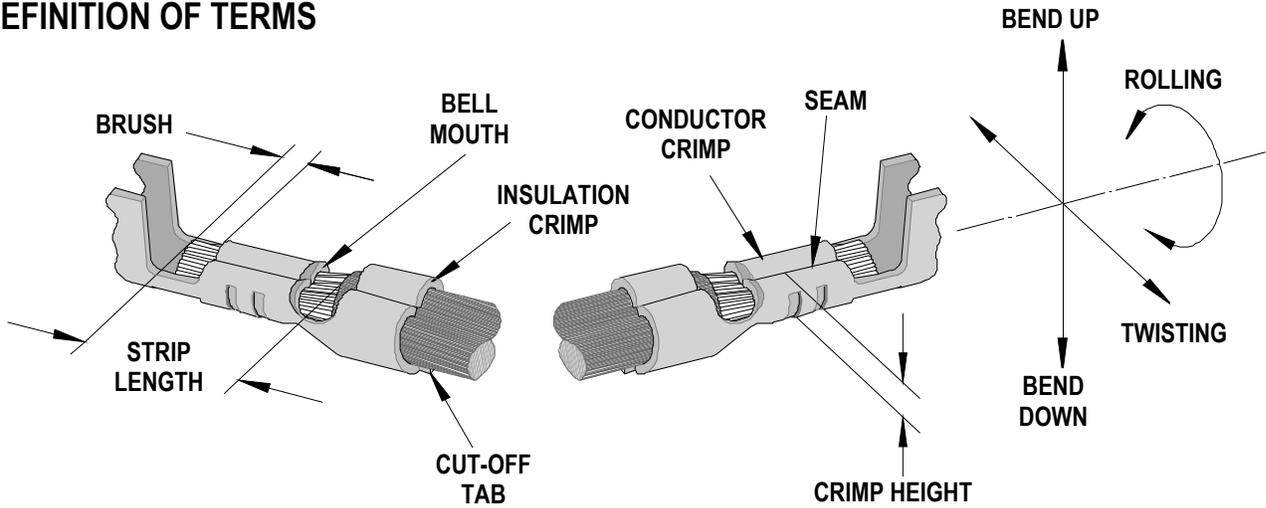

The above terminal drawing is a generic terminal representation. It is not an image of a terminal listed in the scope.

CRIMP SPECIFICATION

| Terminal Series No. | Bell mouth | | Cut-off Tab Maximum | | Conductor Brush | |
|---------------------|------------|-----------|---------------------|------|-----------------|-----------|
| | mm | In. | mm | In. | mm | In. |
| 5556 | 0.20-0.50 | .008-.020 | 0.30 | .012 | 0.00-1.00 | .000-.039 |
| 5558 | 0.20-0.50 | .008-.020 | 0.30 | .012 | 0.00-1.00 | .000-.039 |
| 44476 | 0.20-0.50 | .008-.020 | 0.30 | .012 | 0.00-1.00 | .000-.039 |
| 44478 | 0.20-0.50 | .008-.020 | 0.30 | .012 | 0.00-1.00 | .000-.039 |
| 44485 | 0.20-0.50 | .008-.020 | 0.30 | .012 | 0.00-1.00 | .000-.039 |
| 45750 | 0.20-0.50 | .008-.020 | 0.30 | .012 | 0.00-1.00 | .000-.039 |
| 46012 | 0.20-0.50 | .008-.020 | 0.30 | .012 | 0.00-1.00 | .000-.039 |
| 46018 | 0.20-0.50 | .008-.020 | 0.30 | .012 | 0.00-1.00 | .000-.039 |
| 46083 | 0.20-0.50 | .008-.020 | 0.30 | .012 | 0.00-1.00 | .000-.039 |
| 46098 | 0.20-0.50 | .008-.020 | 0.30 | .012 | 0.00-1.00 | .000-.039 |
| 46134 | 0.20-0.50 | .008-.020 | 0.30 | .012 | 0.00-1.00 | .000-.039 |

| Terminal Series No. | Bend up | Bend down | Twist | Roll | Punch Width (Ref) | | | |
|---------------------|---------|-----------|--------|------|-------------------|------|------------|------|
| | | | | | Conductor | | Insulation | |
| | Degree | | Degree | | mm | In. | mm | In. |
| 5556 | 5 | 2 | 5 | 15 | 1.90 | .075 | 2.20 | .087 |
| 5558 | 5 | 2 | 5 | 15 | 1.90 | .075 | 2.20 | .087 |
| 44476 | 5 | 2 | 5 | 15 | 1.90 | .075 | 2.20 | .087 |
| 44478 | 5 | 2 | 5 | 15 | 1.90 | .075 | 2.20 | .087 |
| 44485 | 5 | 2 | 5 | 15 | 1.90 | .075 | 2.20 | .087 |
| 45750 | 5 | 2 | 5 | 15 | 1.90 | .075 | 2.20 | .087 |
| 46012 | 5 | 2 | 5 | 15 | 1.90 | .075 | 2.20 | .087 |
| 46018 | 5 | 2 | 5 | 15 | 1.90 | .075 | 2.20 | .087 |
| 46083 | 5 | 2 | 5 | 15 | 1.90 | .075 | 2.20 | .087 |
| 46098 | 5 | 2 | 5 | 15 | 1.90 | .075 | 2.20 | .087 |
| 46134 | 5 | 2 | 5 | 15 | 1.90 | .075 | 2.20 | .087 |

Seam

Seam shall not be open
And no wire allowed out
of the crimping area

After crimping, the crimp profiles should measure the following:

| Terminal Series No. | Wire Size | | Conductor | | | | Pull Force Minimum | |
|---------------------|-----------|-----------------|--------------|-----------|-------------------|------|--------------------|------|
| | | | Crimp Height | | Crimp Width (Ref) | | | |
| | AWG | mm ² | mm | In. | mm | In. | N | Lb. |
| 5556 | 16 | 1.31 | 1.14-1.24 | .045-.049 | 1.97 | .078 | 68.4 | 15.4 |
| 5558 | 16 | 1.31 | 1.14-1.24 | .045-.049 | 1.97 | .078 | 68.4 | 15.4 |
| 44476 | 16 | 1.31 | 1.14-1.24 | .045-.049 | 1.97 | .078 | 68.4 | 15.4 |
| 44478 | 16 | 1.31 | 1.14-1.24 | .045-.049 | 1.97 | .078 | 68.4 | 15.4 |
| 44485 | 16 | 1.31 | 1.14-1.24 | .045-.049 | 1.97 | .078 | 68.4 | 15.4 |
| 45750 | 16 | 1.31 | 1.14-1.24 | .045-.049 | 1.97 | .078 | 68.4 | 15.4 |
| 46012 | 16 | 1.31 | 1.14-1.24 | .045-.049 | 1.97 | .078 | 68.4 | 15.4 |
| 46018 | 16 | 1.31 | 1.14-1.24 | .045-.049 | 1.97 | .078 | 68.4 | 15.4 |
| 46083 | 16 | 1.31 | 1.14-1.24 | .045-.049 | 1.97 | .078 | 68.4 | 15.4 |
| 46098 | 16 | 1.31 | 1.14-1.24 | .045-.049 | 1.97 | .078 | 68.4 | 15.4 |
| 46134 | 16 | 1.31 | 1.14-1.24 | .045-.049 | 1.97 | .078 | 68.4 | 15.4 |

*** Tool Qualification Notes:**

1. Pull Force should be measured with no influence from the insulation crimp.
2. The above specifications are guidelines to an optimum crimp.

PARTS LIST

| FineAdjust Applicator 63901-5300 | | | | |
|--|-----------------|------------------------|------------------------------------|-----------------|
| Item | Order No | Engineering No. | Description | Quantity |
| Perishable Tooling | | | | |
| | 63901-5370 | 63901-5370 | Tool Kit (All "Y" Items) | REF |
| 1 | 63444-1909 | 63444-1909 | Conductor Punch | 1 Y |
| 2 | 63445-1943 | 63445-1943 | Conductor Anvil | 1 Y |
| 3 | 63446-2241 | 63446-2241 | Insulation Punch | 1 Y |
| 4 | 63445-2265 | 63445-2265 | Insulation Anvil | 1 Y |
| 5 | 63443-0002 | 63443-0002 | Cut-Off Plunger Front | 1 Y |
| 6 | 63443-0012 | 63443-0012 | Plunger Retainer Front | 1 Y |
| Other Components | | | | |
| 7 | 11-18-4083 | 60707-8 | Feed Guide | 1 |
| 8 | 11-24-1067 | 4996-4 | Cut-Off Plunger Spring | 1 |
| 9 | 63443-0009 | 63443-0009 | Front Scrap Chute | 1 |
| 10 | 63443-0024 | 63443-0024 | Key | 1 |
| 11 | 63443-0090 | 63443-0090 | Wire Stop | 1 |
| 12 | 63443-1717 | 63443-1717 | 18.70mm Height Spacer | 1 |
| 13 | 63443-2216 | 63443-2216 | 16.00mm Coarse Spacer | 1 |
| 14 | 63443-2302 | 63443-2302 | 3.10mm Fine Spacer | 1 |
| 15 | 63443-2802 | 63443-2802 | Plunger Striker | 1 |
| 16 | 63443-2908 | 63443-2908 | Wire Hold Down Plunger | 1 |
| 17 | 63443-6111 | 63443-6111 | Rear Cover | 1 |
| 18 | 63600-1057 | 63600-1057 | Compression Spring | 1 |
| Frame | | | | |
| 19 | 63800-4901 | 63800-4901 | Top | 1 |
| 20 | 63801-3281 | 63801-3281 | Base | 1 |
| 21 | 63801-4650 | 63801-4650 | Track | 1 |
| Hardware | | | | |
| 22 | N/A | N/A | M3 by 6 Long SHCS | 2** |
| 23 | N/A | N/A | M3 by 6 Long FHCS | 1** |
| 24 | N/A | N/A | M4 by 6 Long SHCS | 2** |
| 25 | N/A | N/A | M4 by 12 Long BHCS | 2** |
| 26 | N/A | N/A | M4 by 50 Long SHCS | 2** |
| 27 | N/A | N/A | M5 by 12 Long SHCS | 1** |
| 28 | N/A | N/A | #10-32 by 3/8" Long Flat Point SSS | 1** |
| 29 | N/A | N/A | #10-32 Hex Jam Nut | 1** |
| ** Available from an industrial supply company such as MSC (1-800-645-7270). | | | | |

Assembly Drawing

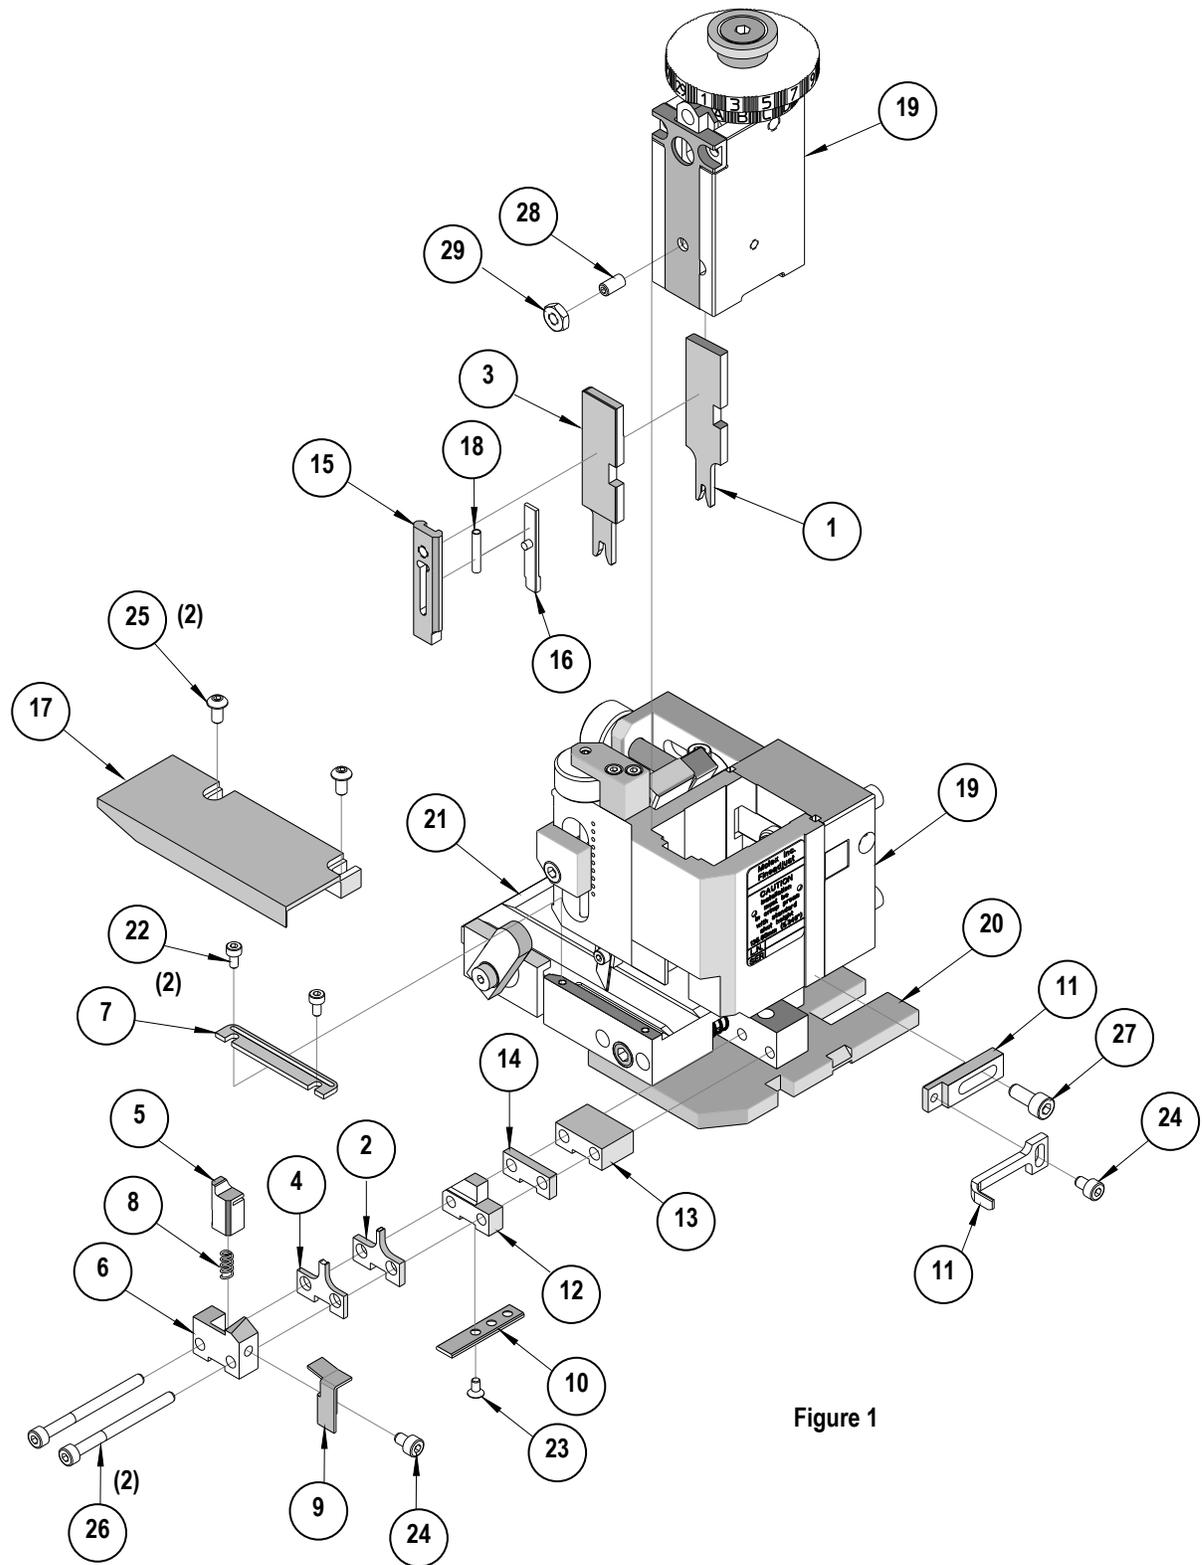


Figure 1

NOTES

1. Molex recommends an extra perishable tooling kit be maintained at your facility.
2. Verify tooling alignment by manually cycling the press and Applicator before crimping under power. Check that all screws are tight.
3. Slugs, Terminals, Dirt and Oil should be kept clear of work area.
4. Wear safety glasses at all times.
5. For recommended maintenance refer to the FineAdjust Manual.

CAUTION: This applicator should only be used in a press with a shut height of 135.80 mm (5.346"). Tooling damage could result at a lower setting.

CAUTION: To prevent injury never operate this Applicator without the guards supplied with the press or wire-processing machine in place. Reference the press or wire processing manufacturer's instruction manual.

CAUTION: Molex crimp specifications are valid only when used with Molex terminals, applicators and tooling.

Americas Headquarters
Lisle, Illinois 60532 U.S.A.
1-800-78MOLEX
amerinfo@molex.com

Far East North Headquarters
Yamato, Kanagawa, Japan
81-462-65-2324
feninfo@molex.com

Far East South Headquarters
Jurong, Singapore
65-6-268-6868
fesinfo@molex.com

European Headquarters
Munich, Germany
49-89-413092-0
eurinfo@molex.com

Corporate Headquarters
2222 Wellington Ct.
Lisle, IL 60532 U.S.A.
630-969-4550
Fax: 630-969-1352

Visit our Web site at <http://www.molex.com>