



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China






## DC-DC Boost Module (0.9-5V)

SKU: FIT0471



### INTRODUCTION

This is a small DC - DC boost module that converts a 0.9 ~ 5v power source to standard 5V, making it capable of supplying power to an Arduino microcontroller and other small electronic devices that use a 5v input. It integrates a PFM DC-DC boost control chip. The maximum output current is up to 500 ~ 600 mA. There are two power input ports, PH2.0 and KF235-3.81-2P which are compatible with DFRobot's [3.7 V lithium battery](#).

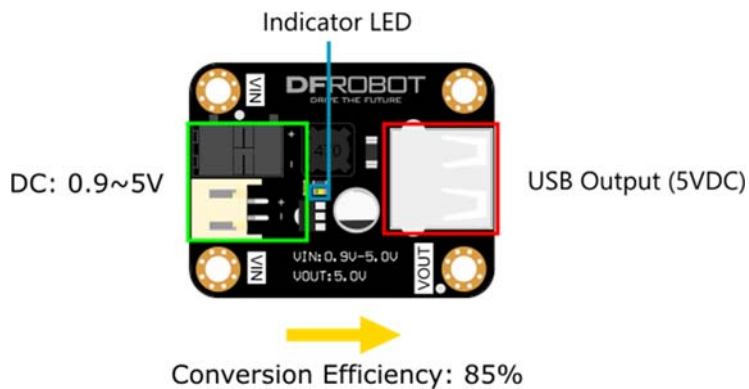

**Note: Please pay attention to the battery polarity when connecting the battery.**

## **SPECIFICATION**

- Input Voltage: 0.9 V to 5 V
- Output Voltage: 5 V
- Conversion Efficiency: 85% (Typ.)
- Duty ratio coefficient: 66% to 78%
- The input interface: PH2.0; KF235-3.81-2P
- Output interface: USB
- Size: 43 \* 33 mm/ 1.69 \* 1.3 inches
- Weight: 14g