



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [67799-0017](#)
Status: **Active**
Overview: [CompactFlash™](#)
Description: 1.27mm Pitch CompactFlash Card Receptacle, SMT, 3.00mm Flange Height, with Housing Stopper, Flange Type B, Gold (Au) Flash, 5µm Tin Plating on Solder Area, Lead-Free

Documents:

[3D Model](#) [Product Specification PS-67799-001 \(PDF\)](#)
[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

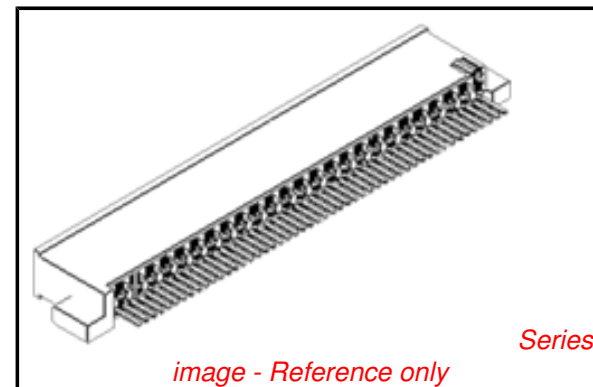

Agency Certification

UL E29179

General

Product Family Memory Card Sockets
 Series [67799](#)
 Comments Flange Type B
 Component Type Receptacle (Card)
 Overview [CompactFlash™](#)
 Product Name CompactFlash
 Style Block
 Type I
 UPC 884982586796

Physical

Card Detection Switch No
 Circuits (Loaded) 50
 Circuits (maximum) 50
 Durability (mating cycles max) 10,000
 Ejector Button No
 Ejector Button Side N/A
 Entry Angle 90° Angle (Side Entry)
 Flammability 94V-0
 Keying to Mating Part None
 Net Weight 0.800/g
 PCB Locator No
 PCB Mounting Side Normal
 PCB Retention None
 Packaging Type Embossed Tape on Reel
 Pitch - Mating Interface 1.27mm
 Pitch - Termination Interface 0.64mm
 Ports 1
 Surface Mount Compatible (SMC) Yes
 Temperature Range - Operating -20°C to +85°C

Electrical

Current - Maximum per Contact 0.5A
 Voltage - Maximum 500V AC
 Voltage Key 3.3V, 5.0V

Material Info

Reference - Drawing Numbers

Product Specification PS-67799-001
 Sales Drawing SD-67799-004

EU RoHS
ELV and RoHS
Compliant
REACH SVHC
 Not Reviewed
Low-Halogen Status
Low-Halogen

China RoHS



Need more information on product environmental compliance?

Email productcompliance@molex.com
 For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

[67799Series](#)

Mates With

Industry standard headers|Type I & Type II

Use With

[67045](#) Card Kit, [67046](#) Card Kit

This document was generated on 01/17/2014

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION