



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



## Product Specification

### +3200 ps/nm (~200km) DWDM XFP Optical Transceiver

### FTLX4213x3xxxx

#### PRODUCT FEATURES

- Supports 10.7Gb/s to 11.35Gb/s
- -500 to +3200 ps/nm Dispersion Tolerance
- Supports ITU C & L-Band DWDM channels
- Supports 8x50GHz tuning range for C-band and 2x200GHz range for L-Band
- Temperature-stabilized DWDM CML™ transmitter
- Temperature range: 0°C to 70°C
- RoHS-6 Compliant (lead-free)
- Power dissipation <4.0W
- Adjustable receiver threshold



#### APPLICATIONS

- Amplified DWDM 10Gb/s SONET/SDH w/FEC
- Amplified DWDM 10Gb/s Ethernet and 10Gb/s Fibre Channel w/FEC

Finisar's FTLX4213x3xxxx Small Form Factor 10Gb/s (XFP) transceiver complies with the XFP Multi-Source Agreement (MSA) Specification<sup>1</sup>. It supports amplified DWDM 10Gb/s SONET/SDH +FEC, 10 Gigabit Ethernet +FEC, and 10 Gigabit Fibre Channel +FEC applications over ~200km of fiber without dispersion compensation. The standard product supports narrow tunability on the C- and L-Band channels with 50GHz spacing. Digital diagnostics functions are available via a 2-wire serial interface, as specified in the XFP MSA. The transceiver is RoHS compliant and lead free per Directive 2002/95/EC<sup>3</sup>, and Finisar Application Note AN-2038<sup>4</sup>.

#### PRODUCT SELECTION

**FTLX4213x3xxxx**

**x:** tuning range  
**xxxx:** ITU-T Channel#  
(see next page)

**C-Band, 8x50GHz XFPs (FTLX4213C3Cxxx)**

| ITU Channel # | Finisar Part Number | Start Frequency (THz) | End Frequency (THz) | Start Wavelength (nm) | End Wavelength (nm) |
|---------------|---------------------|-----------------------|---------------------|-----------------------|---------------------|
| 9155 - 9190   | FTLX4213C3C155N2    | 191.55                | 191.90              | 1562.23               | 1565.09             |
| 9175 - 9210   | FTLX4213C3C175N2    | 191.75                | 192.10              | 1560.61               | 1563.46             |
| 9195 - 9230   | FTLX4213C3C195N2    | 191.95                | 192.30              | 1558.98               | 1561.83             |
| 9205 - 9240   | FTLX4213C3C205N2    | 192.05                | 192.40              | 1558.17               | 1561.01             |
| 9215 - 9250   | FTLX4213C3C215N2    | 192.15                | 192.50              | 1557.36               | 1560.20             |
| 9235 - 9270   | FTLX4213C3C235N2    | 192.35                | 192.70              | 1555.75               | 1558.58             |
| 9255 - 9290   | FTLX4213C3C255N2    | 192.55                | 192.90              | 1554.13               | 1556.96             |
| 9275 - 9310   | FTLX4213C3C275N2    | 192.75                | 193.10              | 1552.52               | 1555.34             |
| 9295 - 9330   | FTLX4213C3C295N2    | 192.95                | 193.30              | 1550.92               | 1553.73             |
| 9305 - 9340   | FTLX4213C3C305N2    | 193.05                | 193.40              | 1550.12               | 1552.93             |
| 9315 - 9350   | FTLX4213C3C315N2    | 193.15                | 193.50              | 1549.32               | 1552.12             |
| 9335 - 9370   | FTLX4213C3C335N2    | 193.35                | 193.70              | 1547.72               | 1550.52             |
| 9355 - 9390   | FTLX4213C3C355N2    | 193.55                | 193.90              | 1546.12               | 1548.91             |
| 9395 - 9430   | FTLX4213C3C395N2    | 193.95                | 194.30              | 1542.94               | 1545.72             |
| 9405 - 9440   | FTLX4213C3C405N2    | 194.05                | 194.40              | 1542.14               | 1544.92             |
| 9415 - 9450   | FTLX4213C3C415N2    | 194.15                | 194.50              | 1541.35               | 1544.13             |
| 9435 - 9470   | FTLX4213C3C435N2    | 194.35                | 194.70              | 1539.77               | 1542.54             |
| 9455 - 9490   | FTLX4213C3C455N2    | 194.55                | 194.90              | 1538.19               | 1540.95             |
| 9475 - 9510   | FTLX4213C3C475N2    | 194.75                | 195.10              | 1536.61               | 1539.37             |
| 9505 - 9540   | FTLX4213C3C505N2    | 195.05                | 195.40              | 1534.25               | 1537.00             |
| 9515 - 9550   | FTLX4213C3C515N2    | 195.15                | 195.50              | 1533.47               | 1536.22             |
| 9535 - 9570   | FTLX4213C3C535N2    | 195.35                | 195.70              | 1531.90               | 1534.64             |
| 9555 - 9590   | FTLX4213C3C555N2    | 195.55                | 195.90              | 1530.33               | 1533.07             |
| 9575 - 9610   | FTLX4213C3C575N2    | 195.75                | 196.10              | 1528.77               | 1531.51             |

**L-Band, 2x200GHz XFPs (FTLX4213J3Lxxx)**

| ITU Channel # | Finisar Part Number | Channel 1 Frequency (THz) | Channel 2 Frequency (THz) | Channel 1 Wavelength (nm) | Channel 2 Wavelength (nm) |
|---------------|---------------------|---------------------------|---------------------------|---------------------------|---------------------------|
| 8670 & 8690   | FTLX4213J3L670      | 186.70                    | 186.90                    | 1605.744                  | 1604.026                  |
| 8700 & 8720   | FTLX4213J3L700      | 187.00                    | 187.20                    | 1603.170                  | 1601.460                  |
| 8710 & 8730   | FTLX4213J3L710      | 187.10                    | 187.30                    | 1602.311                  | 1600.600                  |
| 8780 & 8800   | FTLX4213J3L780      | 187.80                    | 188.00                    | 1596.340                  | 1594.640                  |
| 8790 & 8810   | FTLX4213J3L790      | 187.90                    | 188.10                    | 1595.489                  | 1593.793                  |
| 8830 & 8850   | FTLX4213J3L830      | 188.30                    | 188.50                    | 1592.100                  | 1590.411                  |
| 8880 & 8900   | FTLX4213J3L880      | 188.80                    | 189.00                    | 1587.880                  | 1586.200                  |
| 8910 & 8930   | FTLX4213J3L910      | 189.10                    | 189.30                    | 1585.365                  | 1583.690                  |
| 8920 & 8940   | FTLX4213J3L920      | 189.20                    | 189.40                    | 1584.530                  | 1582.850                  |
| 8950 & 8970   | FTLX4213J3L950      | 189.50                    | 189.70                    | 1582.018                  | 1580.350                  |
| 8990 & 9010   | FTLX4213J3L990      | 189.90                    | 190.10                    | 1578.690                  | 1577.030                  |
| 9030 & 9050   | FTLX4213J3L030      | 190.30                    | 190.50                    | 1575.368                  | 1573.714                  |
| 9070 & 9090   | FTLX4213J3L070      | 190.70                    | 190.90                    | 1572.063                  | 1570.416                  |

**Note\*** → Please contact your Finisar representative for any requirements not supported by the above channel plan.

**I. Pin Descriptions**

| Pin | Logic     | Symbol     | Name/Description   | Ref. |
|-----|-----------|------------|--|------|
| 1   |           | GND        | Module Ground  | 1    |
| 2   |           | VEE5       | Optional –5.2 Power Supply – <b>Not required</b>   |      |
| 3   | LVTTL-I   | Mod-Desel  | Module De-select; When held low allows the module to respond to 2-wire serial interface commands   |      |
| 4   | LVTTL-O   | Interrupt  | Interrupt (bar); Indicates presence of an important condition which can be read over the serial 2-wire interface   | 2    |
| 5   | LVTTL-I   | TX_DIS     | Transmitter Disable; Transmitter laser source turned off   |      |
| 6   |           | VCC5       | +5 Power Supply  |      |
| 7   |           | GND        | Module Ground  | 1    |
| 8   |           | VCC3       | +3.3V Power Supply   |      |
| 9   |           | VCC3       | +3.3V Power Supply   |      |
| 10  | LVTTL-I   | SCL        | Serial 2-wire interface clock  | 2    |
| 11  | LVTTL-I/O | SDA        | Serial 2-wire interface data line  | 2    |
| 12  | LVTTL-O   | Mod_Abs    | Module Absent; Indicates module is not present. Grounded in the module.  | 2    |
| 13  | LVTTL-O   | Mod_NR     | Module Not Ready; Finisar defines it as a logical OR between RX_LOS and Loss of Lock in TX/RX.   | 2    |
| 14  | LVTTL-O   | RX_LOS     | Receiver Loss of Signal indicator  | 2    |
| 15  |           | GND        | Module Ground  | 1    |
| 16  |           | GND        | Module Ground  | 1    |
| 17  | CML-O     | RD-        | Receiver inverted data output  |      |
| 18  | CML-O     | RD+        | Receiver non-inverted data output  |      |
| 19  |           | GND        | Module Ground  | 1    |
| 20  |           | VCC2       | +1.8V Power Supply – <b>Not required</b>   |      |
| 21  | LVTTL-I   | P_Down/RST | Power Down; When high, places the module in the low power stand-by mode and on the falling edge of P_Down initiates a module reset<br>Reset; The falling edge initiates a complete reset of the module including the 2-wire serial interface, equivalent to a power cycle. |      |
| 22  |           | VCC2       | +1.8V Power Supply – <b>Not required</b>   |      |
| 23  |           | GND        | Module Ground  | 1    |
| 24  | PECL-I    | RefCLK+    | Reference Clock non-inverted input, AC coupled on the host board – <b>Not required</b>   |      |
| 25  | PECL-I    | RefCLK-    | Reference Clock inverted input, AC coupled on the host board – <b>Not required</b>   |      |
| 26  |           | GND        | Module Ground  | 1    |
| 27  |           | GND        | Module Ground  | 1    |
| 28  | CML-I     | TD-        | Transmitter inverted data input  |      |
| 29  | CML-I     | TD+        | Transmitter non-inverted data input  |      |
| 30  |           | GND        | Module Ground  | 1    |

**Notes:**

1. Module circuit ground is isolated from module chassis ground within the module.
2. Open collector; should be pulled up with 4.7k – 10kohms on host board to a voltage between 3.15V and 3.6V.

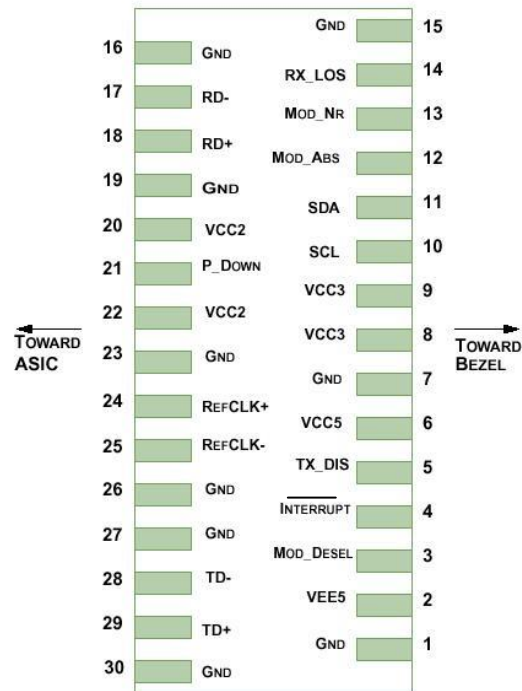


Diagram of Host Board Connector Block Pin Numbers and Names

## II. Absolute Maximum Ratings

| Parameter                  | Symbol            | Min  | Typ | Max | Unit | Ref. |
|----------------------------|-------------------|------|-----|-----|------|------|
| Maximum Supply Voltage #1  | V <sub>cc3</sub>  | -0.5 |     | 4.0 | V    |      |
| Maximum Supply Voltage #2  | V <sub>cc5</sub>  | -0.5 |     | 6.0 | V    |      |
| Storage Temperature        | T <sub>S</sub>    | -40  |     | 85  | °C   |      |
| Case Operating Temperature | T <sub>OP</sub>   | 0    |     | 70  | °C   |      |
| Receiver Damage Threshold  | P <sub>Rdmg</sub> | +5   |     |     | dBm  |      |

**III. Electrical Characteristics ( $T_{OP} = 0$  to  $70$  °C,  $V_{CC5} = 4.75$  to  $5.25$  Volts)**

| Parameter                      | Symbol           | Min              | Typ | Max             | Unit     | Ref. |   |
|--------------------------------|------------------|------------------|-----|-----------------|----------|------|---|
| Supply Voltage #1              | Vcc5             | 4.75             |     | 5.25            | V        |      |   |
| Supply Voltage #2              | Vcc3             | 3.13             |     | 3.46            | V        |      |   |
| Supply Current – Vcc5 supply   | Icc5             |                  |     | 500             | mA       |      |   |
| Supply Current – Vcc3 supply   | Icc3             |                  |     | 750             | mA       |      |   |
| Module total power             | P                |                  |     | 4.0             | W        | 1    |   |
| <b>Transmitter</b>             |                  |                  |     |                 |          |      |   |
| Input differential impedance   | $R_{in}$         |                  | 100 |                 | $\Omega$ | 2    |   |
| Differential data input swing  | $V_{in,pp}$      | 120              |     | 820             | mV       |      |   |
| Transmit Disable Voltage       | $V_D$            | 2.0              |     | Vcc             | V        | 3    |   |
| Transmit Enable Voltage        | $V_{EN}$         | GND              |     | GND+ 0.8        | V        |      |   |
| Transmit Disable Assert Time   |                  |                  |     | 100             | us       |      |   |
| <b>Receiver</b>                |                  |                  |     |                 |          |      |   |
| Differential data output swing | $V_{out,pp}$     | 340              | 650 | 850             | mV       | 4    |   |
| Data output rise time          | $t_r$            |                  |     | 38              | ps       | 5    |   |
| Data output fall time          | $t_f$            |                  |     | 38              | ps       | 5    |   |
| LOS Fault                      | $V_{LOS\ fault}$ | $V_{cc} - 0.5$   |     | $V_{cc_{HOST}}$ | V        | 6    |   |
| LOS Normal                     | $V_{LOS\ norm}$  | GND              |     | GND+0.5         | V        | 6    |   |
| Power Supply Rejection         | PSR              | See Note 7 below |     |                 |          |      | 7 |

Notes:

1. Maximum total power value is specified across the full temperature and voltage range.
2. After internal AC coupling.
3. Or open circuit.
4. Into 100 ohms differential termination.
5. 20 – 80 %
6. Loss Of Signal is open collector to be pulled up with a 4.7k – 10kohm resistor to 3.15 – 3.6V. Logic 0 indicates normal operation; logic 1 indicates no signal detected.
7. Per Section 2.7.1. in the XFP MSA Specification<sup>1</sup>.

**IV. Optical Characteristics (EOL, T<sub>OP</sub> = 0 to 70°C, V<sub>CC5</sub> = 4.75 to 5.25 Volts)**

| <b>Transmitter</b>                          |                    |                    |   |  |                    |                   |
|---|--------------------|--------------------|---|--|--------------------|-------------------|
| Parameter                                   | Symbol             | Min                | Typ   | Max  | Unit               | Ref.              |
| Output Opt. Pwr: 9/125 SMF                  | P <sub>OUT</sub>   | 0                  |   | +4.0   | dBm                |                   |
| Optical Extinction Ratio                    | ER                 | 8.2                |   |  | dB                 | 1                 |
| Center Wavelength Spacing                   |                    |                    | 50  |  | GHz                | 2                 |
| Transmitter Center Wavelength – End Of Life | fc                 | X-5                | X   | X+5  | GHz                | 3                 |
| Sidemode Suppression ratio                  | SSR <sub>min</sub> | 35                 |   |  | dB                 |                   |
| Tx Jitter 20kHz-80MHz                       | T <sub>Xj1</sub>   |                    |   | 0.3  | UI                 | 4,5               |
| Tx Jitter 4MHz – 80MHz                      | T <sub>Xj2</sub>   |                    |   | 0.1  | UI                 | 4,5               |
| Tx Disable Negate Time                      | t <sub>TxE</sub>   |                    |   | 60   | seconds            |                   |
| Relative Intensity Noise                    | RIN                |                    |   | -135   | dB/Hz              |                   |
| <b>Receiver</b>                             |                    |                    |   |  |                    |                   |
| Maximum Input Power                         | P <sub>MAX</sub>   | -7                 |   |  | dBm                |                   |
| Optical Center Wavelength                   | λ <sub>C</sub>     | 1270               |   | 1615   | nm                 |                   |
| Receiver Reflectance                        | R <sub>RX</sub>    |                    |   | -27  | dB                 |                   |
| LOS De-Assert                               | LOS <sub>D</sub>   |                    |   | -30  | dBm                |                   |
| LOS Assert                                  | LOS <sub>A</sub>   | -37                |   |  | dBm                |                   |
| LOS Hysteresis                              |                    | 0.5                |   |  | dB                 |                   |
| <b>Receiver Sensitivity</b>                 |                    |                    |   |  |                    | 6                 |
| Data rate (Gb/s)                            | BER                | Dispersion (ps/nm) | Sensitivity back-to-back at OSNR>30dB (dBm)                     | Sensitivity at -500 to +3200ps/nm with OSNR>30dB (dBm) | Threshold Adjustm. |                   |
| 10.7  | 1e-4               | -500 to +3200      | -27   | -25  | Yes                |                   |
| 11.1  | 1e-4               | -500 to +3200      | -27   | -25  | Yes                |                   |
| 11.3  | 1e-4               | -500 to +3200      | -27   | -25  | Yes                |                   |
| <b>OSNR Performance</b>                     |                    |                    |   |  |                    | 6,7               |
| Data rate (Gb/s)                            | BER                | Dispersion (ps/nm) | Max OSNR, -500 ps/nm to +3200 ps/nm at Power: -8 to -19dBm (dB) |  |                    | Threshold Adjust. |
| 10.7  | 1e-4               | -500 to +3200      | 19  |  |                    | Yes               |
| 11.1  | 1e-4               | -500 to +3200      | 19  |  |                    | Yes               |
| 11.3  | 1e-4               | -500 to +3200      | 19  |  |                    | Yes               |

**Notes:**

1. Measured with unfiltered eye pattern. (without 4<sup>th</sup> order Bessel-Thompson Filter)
2. Corresponds to approximately 0.8 nm. Please contact Finisar for 50GHz support.
3. X = Specified ITU Grid frequency. Wavelength stability is achieved within xx seconds of power up. Please contact Finisar for narrow tunability support.
4. Measured with a host jitter of 50 mUI peak-to-peak.
5. GR-253-CORE Issue 4
6. Measured at 1528-1600nm with worst ER; BER<10<sup>-4</sup>; PRBS31.
7. All OSNR measurements are performed with 0.1nm resolution.

**V. General Specifications**

| Parameter                     | Symbol           | Min  | Typ | Max  | Units | Ref. |
|-------------------------------|------------------|------|-----|------|-------|------|
| Bit Rate                      | BR               | 10.7 |     | 11.3 | Gb/s  |      |
| Maximum Supported Link Length | L <sub>MAX</sub> |      | 200 |      | km    | 1    |

Notes:

- Distance indicates dispersion budget. Optical amplification is required to achieve maximum distance.

**VI. Environmental Specifications**

Finisar FTLX4213x3xxxx XFP transceivers have an operating temperature range from -5°C to +70°C case temperature.

| Parameter                  | Symbol           | Min | Typ | Max | Units | Ref. |
|----------------------------|------------------|-----|-----|-----|-------|------|
| Case Operating Temperature | T <sub>op</sub>  | 0   |     | 70  | °C    |      |
| Storage Temperature        | T <sub>sto</sub> | -40 |     | 85  | °C    |      |

**VII. Regulatory Compliance**

Finisar FTLX4213x3xxxx XFP transceivers are Class 1 Laser Products. They are certified per the following standards:

| Feature           | Agency   | Standard  | Certificate Number |
|-------------------|----------|---|--------------------|
| Laser Eye Safety  | FDA/CDRH | CDRH 21 CFR 1040 and Laser Notice 50  | 9210176-77         |
| Laser Eye Safety  | TÜV      | EN 60825-1: 2007, EN60825-2:2004+A1<br>IEC 60825-1: 2007 (2 <sup>nd</sup> Edition)<br>IEC 60825-2: 2010 (3 <sup>rd</sup> Edition) | 72101686           |
| Electrical Safety | TÜV      | EN 60950:2006+A11   | 72101686           |
| Electrical Safety | UL/CSA   | CLASS 3862.07<br>CLASS 3862.87  | 2283290            |

Copies of the referenced certificates are available at Finisar Corporation upon request.



## VIII. Digital Diagnostics Functions

As defined by the XFP MSA<sup>1</sup>, Finisar XFP transceivers provide digital diagnostic functions via a 2-wire serial interface, which allows real-time access to the following operating parameters:

- Transceiver temperature
- Laser bias current
- Transmitted optical power
- Received optical power
- Transceiver supply voltage
- TEC Temperature

It also provides a sophisticated system of alarm and warning flags, which may be used to alert end-users when particular operating parameters are outside of a factory-set normal range.

The operating and diagnostics information is monitored and reported by a Digital Diagnostics Transceiver Controller (DDTC) inside the transceiver, which is accessed through the 2-wire serial interface. When the serial protocol is activated, the serial clock signal (SCL pin) is generated by the host. The positive edge clocks data into the XFP transceiver into those segments of its memory map that are not write-protected. The negative edge clocks data from the XFP transceiver. The serial data signal (SDA pin) is bi-directional for serial data transfer. The host uses SDA in conjunction with SCL to mark the start and end of serial protocol activation. The memories are organized as a series of 8-bit data words that can be addressed individually or sequentially. The 2-wire serial interface provides sequential or random access to the 8 bit parameters, addressed from 000h to the maximum address of the memory.

For more detailed information, including memory map definitions, please see the XFP MSA documentation<sup>1</sup>.

### Receiver Threshold Adjustment

The FTLX4213M3xxx also provides access to receiver decision threshold adjustment via 2-wire serial interface, in order to improve receiver OSNR performance based on specific link conditions. It is implemented as follows:

- Rx Threshold of XFP transceivers will be factory-set for optimized performance in non-FEC applications. This will be the default value during both cold start (power-up) and warm start (module reset).
- The transceiver supports adjustment of Rx Threshold value by the host through register 76d, table 01h. This is intended to be used in FEC applications.

- Register 76d, table 01h is a volatile memory. Therefore if the transceiver is power-cycled, the register starts up with a value of 00h which corresponds to the default Rx Threshold value.
- The threshold adjustment input value is 2's complement 7 bit value (-128 to +127), with 0 corresponding to default Rx threshold value. Full range of adjustment provides at least a  $\pm 10\%$  change in Rx threshold from the default value.

### ITU channel Tuning (per SFF-8477 rev 1.3)

To avoid possible conflict with legacy tuning systems designed to INF-8077i, the frequency grid tuning commands of SFF-8477 supplement rather than supplant the wavelength grid tuning commands of INF-8077i.

### Tuning Management Interface for ITU Frequency Grid Applications

Finisar's FTLX4213M3xxxx supports Frequency tuning by channel number only. The XFP frequency tuning is indicated by the transceiver description encoded in Serial ID Byte 138 bit 3.

| Data Address | Bit | Description   |
|--------------|-----|---|
| 138          | 3   | Tunable DWDM (selection by channel number, bytes 112-113) |
| 138          | 2   | Tunable DWDM (selection in 50 pm steps, bytes 72-73)      |
| 138          | 0-1 | Reserved  |

A desired frequency channel can be commanded by the user by writing into Bytes 112 (MSB) and 113 (LSB).

Frequency channel control command:

| Address               | Bit | Name               | Description   |
|-----------------------|-----|--------------------|---|
| 112 (MSB) & 113 (LSB) | All | Channel Number Set | User input of channel number, which is an integer 1 to N (N=Number of Channels) |
| 114 (MSB) & 115 (LSB) | All | Frequency Error    | Frequency error reported in 16 bit signed integer with LSB=0.1 GHz              |
| 116 - 117             | All | Reserved           | Reserved  |

The channel number is derived from the following equation using parameters found in Module capabilities as listed in Byte Addresses 60-69:

$$\text{Channel number} = 1 + (\text{Desired Frequency} - \text{First Frequency}) / \text{Grid Spacing}$$

If "0" is used for the channel number, the XFP will go into standby mode until a valid channel number is received.

### Tunable Transceiver Initialization / Power Cycling:


When a tunable module is plugged in for the first time it will go to a default channel, or if Tx\_DIS is asserted it will go to a standby condition.

When the module is power cycled it will automatically go to the last channel selected, or if Tx\_DIS is asserted it will go to a standby condition. If Tx\_DIS is asserted, the last channel selected will be cleared, and a valid new channel command will be required to set a channel.

If the Tx is disabled and then re-enabled, the module returns to the last channel selected.


### IX. Mechanical Specifications

Finisar's XFP transceivers are compliant with the dimensions defined by the XFP Multi-Sourcing Agreement (MSA).

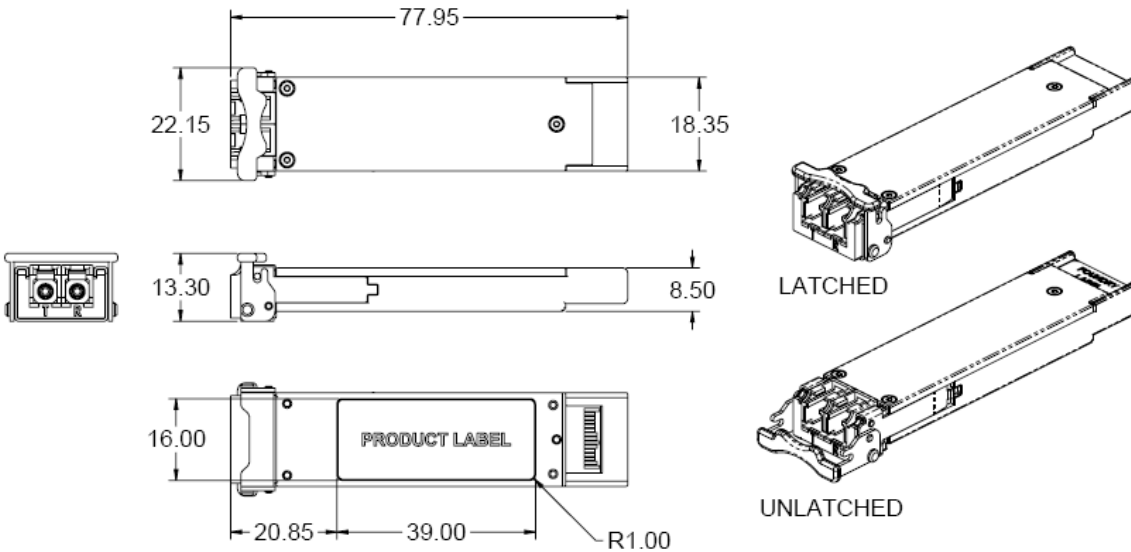


**XFP Transceiver (dimensions are in mm)**


**X. PCB Layout and Bezel Recommendations**

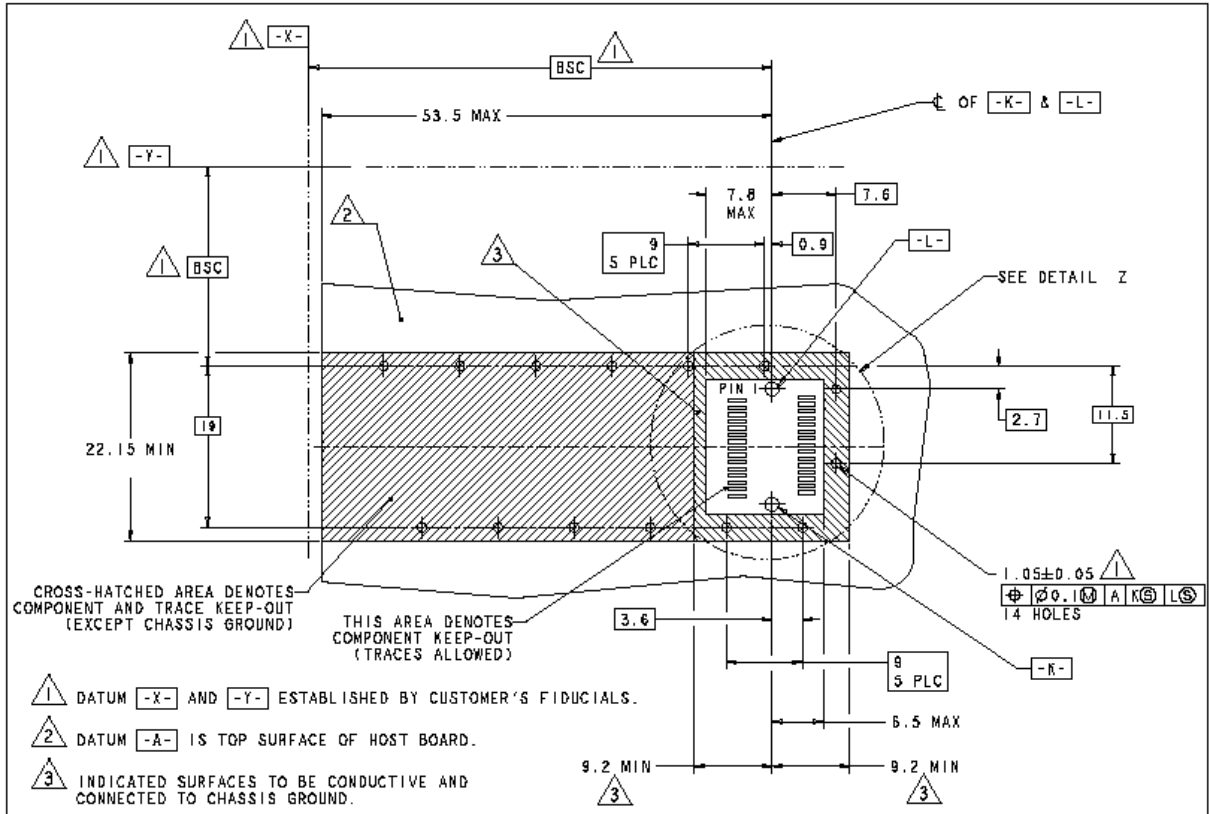

**XFP Host Board Mechanical Layout (dimensions are in mm)**

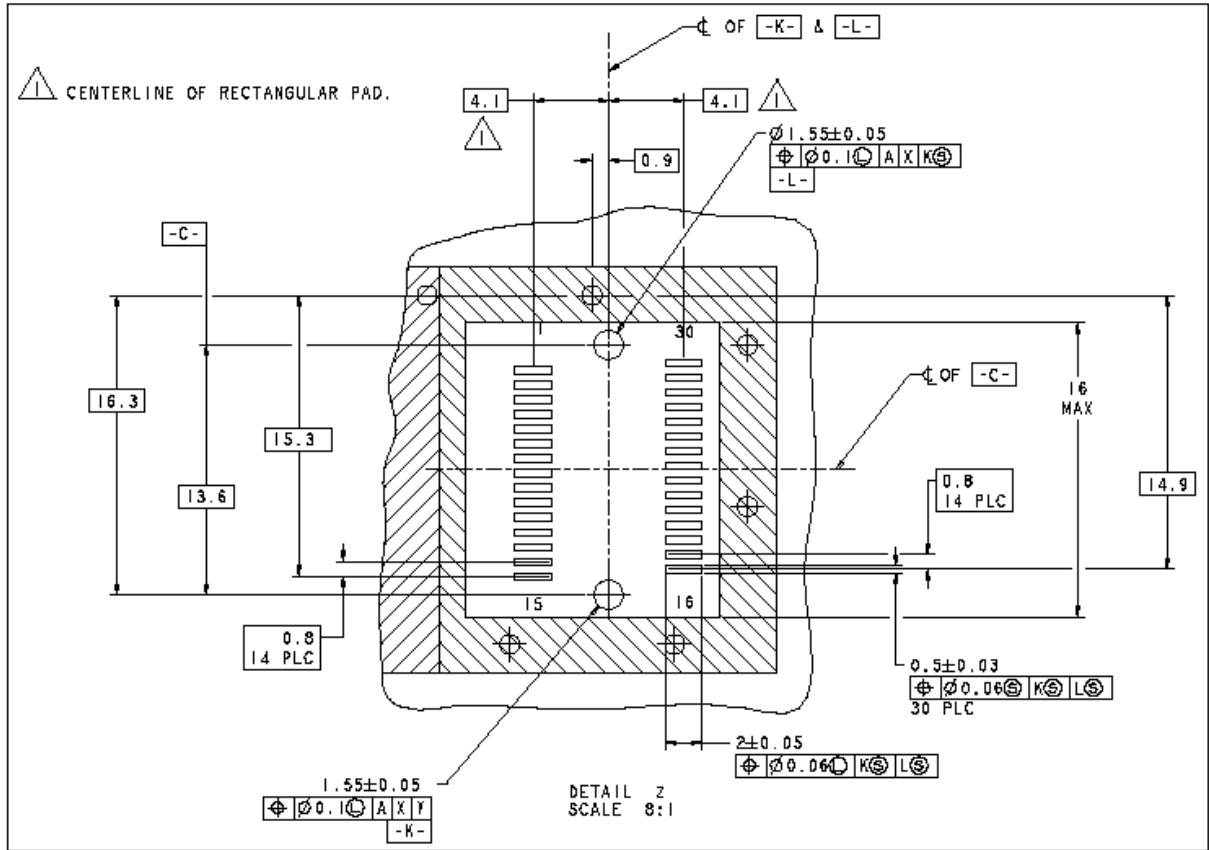

**XFP Detail Host Board Mechanical Layout (dimensions are in mm)**

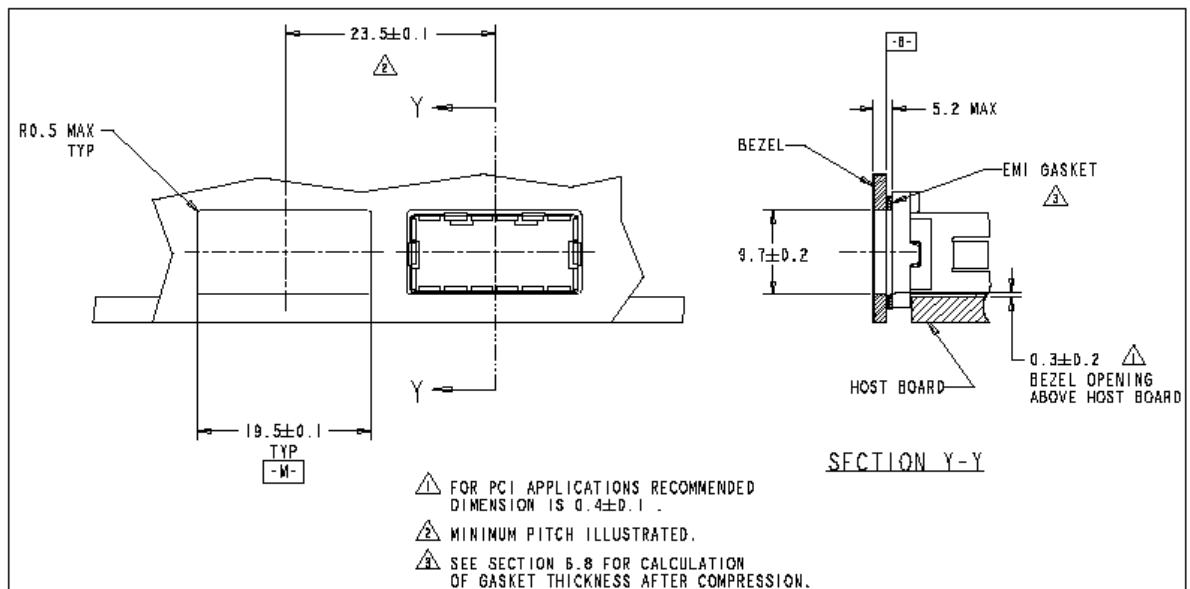

**XFP Recommended Bezel Design (dimensions are in mm)**

**XI. Notes & Exceptions**

The FTLX4213x3xxxx product family has the following exceptions to the XFP MSA;

- Tx\_Disable time of <100usec,
- Tx\_Disable negate time of <60seconds
- Tx\_NR is not implemented.
- Reset Completion Bit is not implemented in EEPROM (Table 0: Byte 84: Bit 0)

**XII. References**

1. 10 Gigabit Small Form Factor Pluggable Module (XFP) Multi-Source Agreement (MSA), Rev 4.5 – August 2005. Documentation is currently available at <http://www.xfpmsa.org/>
2. Application Note AN-2035: “Digital Diagnostic Monitoring Interface for XFP Optical Transceivers” – Finisar Corporation, December 2003
3. Directive 2002/95/EC of the European Council Parliament and of the Council, “on the restriction of the use of certain hazardous substances in electrical and electronic equipment”. January 27, 2003.
4. “Application Note AN-2038: Finisar Implementation Of RoHS Compliant Transceivers”, Finisar Corporation, January 21, 2005.

**XIII. Revision History**

| Revision | Date       | Description  |
|----------|------------|--|
| A1       | 4/15/2008  | <ul style="list-style-type: none"> <li>• Preliminary document created.</li> </ul>  |
| C1       | 7/20/2009  | <ul style="list-style-type: none"> <li>• Updated Optical Spec for OSNR &amp; Rx_Sensitivity</li> <li>• Updated Tx_Disable &lt;100us</li> </ul> |
| C2       | 3/18/2010  | <ul style="list-style-type: none"> <li>• Updated Icc3 value</li> <li>• Corrected Finisar Part Numbers</li> </ul>                               |
| C3       | 8/28/2010  | <ul style="list-style-type: none"> <li>• Added “Notes &amp; Exceptions” Section</li> </ul>   |
| C4       | 12/16/2010 | <ul style="list-style-type: none"> <li>• Updated channel availability</li> </ul>   |
| C5       | 2/08/2011  | <ul style="list-style-type: none"> <li>• Added additional C-band Product Codes</li> </ul>  |
| C6       | 2/24/2011  | <ul style="list-style-type: none"> <li>• Corrected Tx_Disable max value typo in Section III</li> </ul>   |
| C7       | 11/23/2011 | <ul style="list-style-type: none"> <li>• Updated C-band Product Codes</li> </ul>   |

## **XII. For More Information**

Finisar Corporation  
1389 Moffett Park Drive  
Sunnyvale, CA 94089-1133  
Tel. 1-408-548-1000  
Fax 1-408-541-6138  
[sales@finisar.com](mailto:sales@finisar.com)  
[www.finisar.com](http://www.finisar.com)