



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




Product Specification

10 Gbps 850nm PIN + Preamp SC ROSA Package

HFD6380-418

PRODUCT FEATURES

- High gain, inverting
- LC ROSA package
SC ROSA package.
- High performance GaAs PIN photodiode with separate transimpedance amplifier
- Low electrical parasitic TO46 package
- Data rates up to 10.7Gbps
- Separate detector bias pin can be used for receive
- power monitoring
- Low power dissipation
- Can drive SERDES directly
- Flex circuit interface fits all 10GB MSAs
- RoHS compliant (EU Directive on Restrictions of Hazardous Substances, 2002/95/EC)



The HFD6380-418 uses a high-performance GaAs PIN photo-detector packaged with a transimpedance amplifier designed to meet performance requirements for 10Gbps data communication over multi-mode optical fiber at 850nm. Applications include Ethernet, Fiber Channel and ATM protocols. The optical assembly is designed to interface either 50mm or 62.5mm multi-mode fiber.

The HFD6380-418 is designed to be paired with Advanced Optical Components HFE6392 VCSEL 10Gbps TOSA products (see data sheets for HFE6392 products at www.finisar.com/).

PRODUCT SELECTION

| Part Number | Description |
|-------------|---|
| HFD6380-418 | SC ROSA, with flex. High gain, inverting. |

I. Absolute Maximum Ratings

| Parameter | Rating |
|---------------------------------|---------------------------|
| Storage Temperature | -40 to +95°C |
| Case Operating Temperature | -20 to +95°C |
| Lead Solder Temperature | 260°C, 10 sec. |
| Power Supply Voltage | -0.3V to 3.6V |
| PIN Voltage | 10V |
| Incident Optical Power | 0 dBm average,+4 dBm peak |
| ESD Exposure (Human Body Model) | 225V |

Notice

Stresses greater than those listed under “Absolute Maximum Ratings” may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operations section for extended periods of time may affect reliability.

Notice

The inherent design of this component causes it to be sensitive to electrostatic discharge (ESD). To prevent ESD-induced damage and/or degradation to equipment, take normal ESD precautions when handling this product

II. Electro-Optical Characteristics (Vcc =3.3V, AC coupled to 50W (100W differential), -20°C < TA <95°C unless otherwise specified)

| Parameters | Test Condition | Symbol | Min. | Typ. | Max. | Units | Notes |
|-----------------------------------|--|----------------|------|-------|------|---------------|-------|
| Data Rate | | DR | | | 10.7 | GBd | 1 |
| Input Optical Wavelength | 0°C to 70°C | λ_p | 830 | 850 | 870 | nm | |
| Supply Voltage | | | 2.97 | 3.3 | 3.63 | V | |
| Supply Current | $P_R=0\mu W$, $R_L=50\Omega$ AC coupled | I_{CC} | | 35 | 50 | mA | |
| PD Bias Voltage | | VPD_Bias | 3 | 3.3 | 3.6 | V | 10 |
| Photodiode Responsivity | $P_R = -12\text{dBm}$ | Resp | 0.45 | 0.5 | 0.6 | A/W | 10 |
| Active Area (diameter) | | | | 40 | | μm | |
| Optical Return Loss | $P_R = -12\text{dBm}$ | ORL | 12 | | | dB | |
| Differential Output Voltage Swing | $P_{R,OMA} = -12\text{Bm}$, AC Coupled to $R_L=50\Omega$ | $V_{o(pk-pk)}$ | 150 | 200 | 330 | mV | 2,3 |
| Differential Responsivity | $P_{R,OMA} = -12\text{dBm}$, AC Coupled to $R_L=50\Omega$ | T | 2300 | 3000 | 5300 | V/W | 2,3 |
| -3dB Optical/Electrical Bandwidth | $P_{R,OMA} = -12\text{dBm}$ Temp = 25°C | BW | 7.5 | 9 | 12.3 | GHz | 3,4 |
| Low Frequency -3dB Cutoff | $P_{R,OMA} = -12\text{dBm}$ | BW_{LF} | | | 90 | KHz | 2,3 |
| Output Impedance | | Z_{OUT} | 40 | 50 | 60 | Ω | |
| Sensitivity, OMA | | S | | -13.5 | -12 | dBm | 5,9 |
| Stressed Sensitivity | Per IEEE802.3ae | $S_{Stressed}$ | | -11.5 | -9 | dBm | 6 |
| Rise/Fall Time | $P_{R,OMA} = -12\text{dBm}$, (20%-80%) | T_R/T_F | | 30 | 50 | ps | 3,7 |
| Group Delay | Measured from IS211 Phase | GVD | -50 | | 50 | ps | |
| Overload Power | | POVLD AVE | 0 | | | dBm | |
| | | POVLD OMA | 2 | | | | |
| Power Supply Rejection Ratio | $P_R = 0\mu W$ (Dark), Freq = 1000MHz | PSRR | | 30 | | dB | 2,8 |

Notes:

- The data rate can be increased to 12.5Gbps, but the sensitivity will be decreased by approximately 3dB
- PR is the average optical power at the fiber face.
- PR OMA is the peak to peak optical power at the fiber face (Optical Modulation Amplitude) where ER is the extinction ratio (linear) of the optical source.



$$P_{R,OMA} = \frac{2P_R ER - 1}{ER + 1}$$

- Bandwidth and Low Frequency Cutoff are measured with a small signal sinusoidal light source with -10dBm average power
- Sensitivity is measured with an optical source with an extinction ratio of 3dB.
- Stressed receiver sensitivity is measured with 3.5dB vertical eye closure (intersymbol interference) and with 0.3UI of jitter added. The measurement technique is defined in IEEE 802.3ae.
- Rise/Fall times are corrected for optical source Rise/Fall times. The corrected value is calculated as the square root of the difference of the squares of the measured differential detector output and the source.
- Value shown is with external power supply filtering.
- For best sensitivity, a limiting amplifier may be required for operation.
- The PD voltage must be connected to a positive 3.3V power supply (nominal).Maximum

III. Recommended interface circuit for the HFD6380-418

Optional RSSI implementation is shown in blue.

Optional 100Ω differential termination for high impedance limiting amplifiers is shown in red.

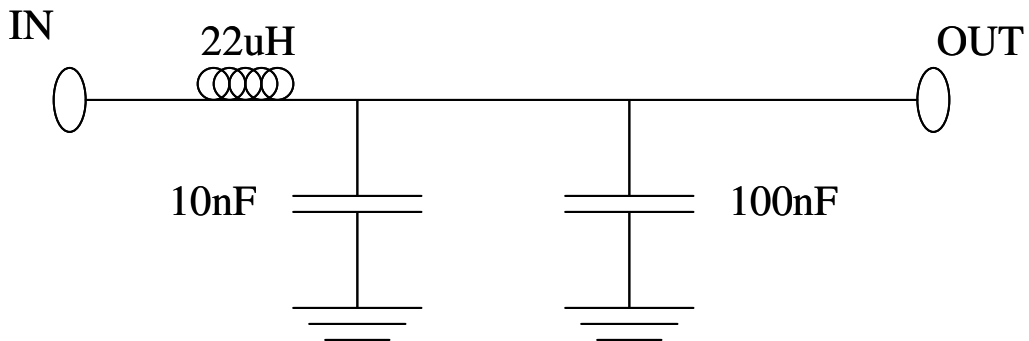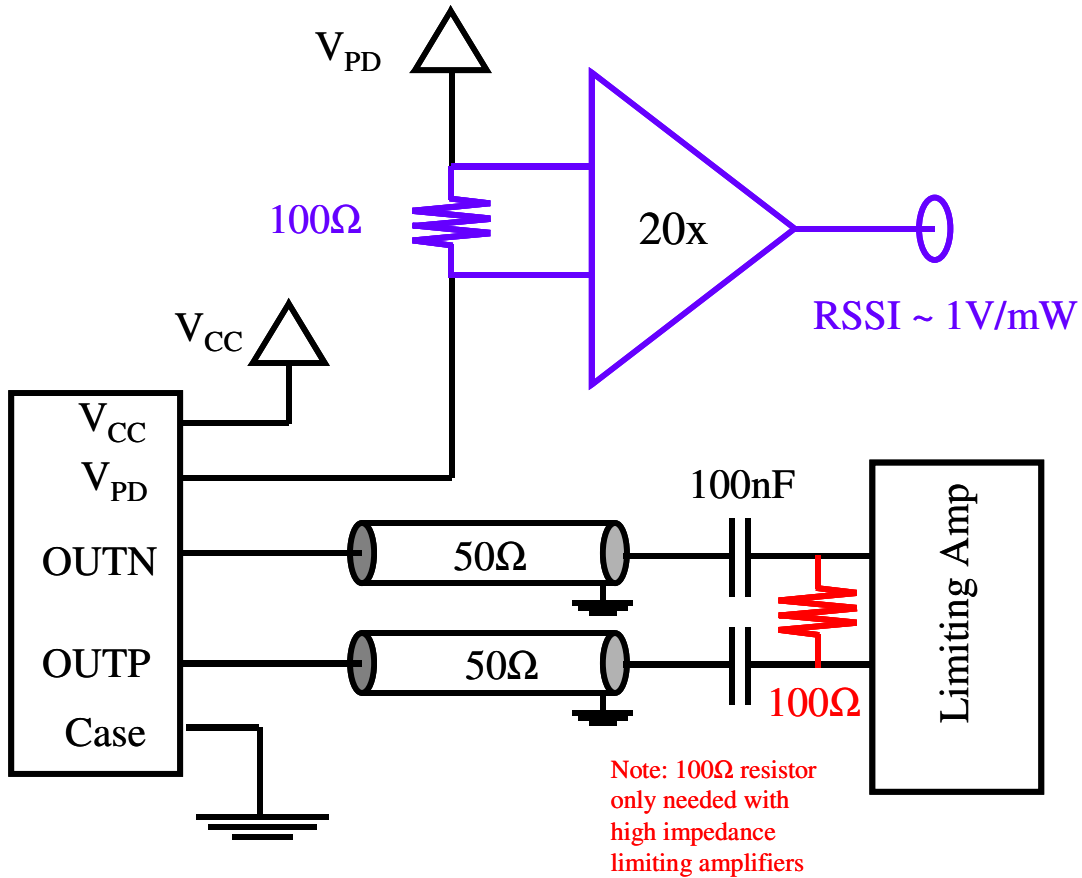






IV. Environmental Specifications

| Parameter | Symbol | Min | Typ | Max | Units | Ref. |
|----------------------------|------------------|-----|-----|-----|-------|------|
| Case Operating Temperature | T _{op} | -20 | | 95 | °C | |
| Storage Temperature | T _{sto} | -40 | | 95 | °C | |

V. Mechanical Specifications

| PIN | Description |
|-----|-----------------|
| 1 | V _{cc} |
| 2 | CASE |
| 3 | OUTN |
| 4 | OUTP |
| 5 | CASE |
| 6 | V _{PD} |

Mounting Dimensions - SC ROSA with flex

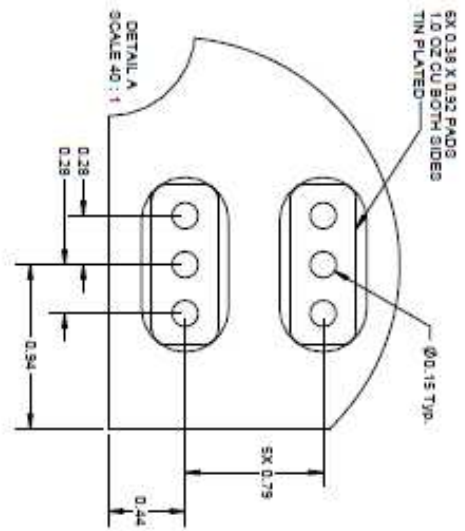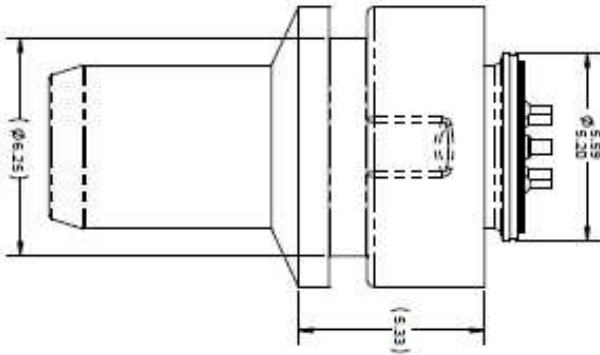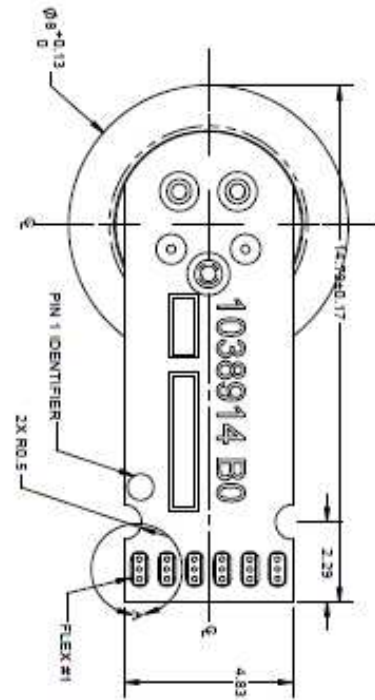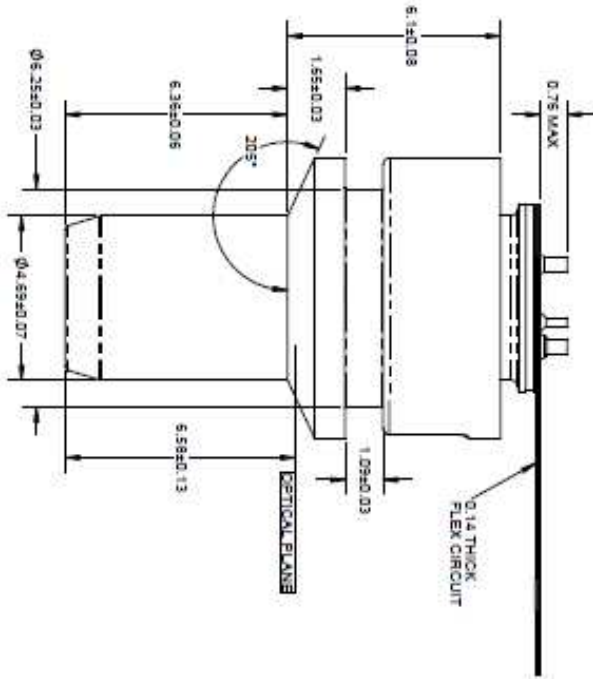

VI. Revision History

| Revision | Date | Description |
|-----------------|-------------|---------------------------------------|
| B00 | 10/6/2014 | • Changed to Standard Finisar Format. |

VII. For More Information

Finisar Corporation
1389 Moffett Park Drive
Sunnyvale, CA 94089-1133
Tel. 1-408-548-1000
Fax 1-408-541-6138
sales@finisar.com
www.finisar.com