



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




# HLC2705

## Encoder Detector

### FEATURES

- Side-looking plastic package
- TTL/LSTTL/CMOS compatible
- On-chip quadrature logic which provides tach and direction outputs
- Linear or rotary encoder applications
- Resolution to 0.018 in.(.457)
- Sensitivity versus temperature compensation
- Mechanically and spectrally matched to SEP8506 and SEP8706 infrared emitting diodes

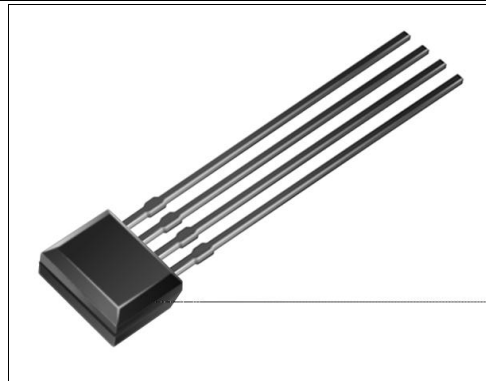

INFRA-74.TIF

### DESCRIPTION

The HLC2705 detector is designed to sense speed and direction of mechanical motion. Applications include rotary and linear encoders; the device is especially well suited for the encoding function in an optical mouse.


The detector is a monolithic IC, consisting of two narrow adjacent photodiodes, amplifier stages, and quadrature logic which provides two outputs. One is a fixed duration, low level active tachometer (counting) pulse. It is generated whenever the "A" channel illumination passes through the threshold level. The second is a direction output which is set to a logic high or a logic low depending upon which channel is illuminated first. The sensor also has sensitivity compensation circuitry for the output power versus temperature characteristic of an IRED. The IC is encapsulated in a molded, unlensed black plastic package which is transmissive to IR energy, yet provides shielding from visible light.

The tachometer output is an NPN collector, internally connected to V<sub>CC</sub> through a 10 kΩ (nominal) resistor. The direction output is a totem-pole configuration. Both are capable of directly driving TTL loads.

The tachometer pulse is generated at both the increasing and decreasing illumination thresholds of the "A" channel, resulting in two tachometer pulses for each mechanical period of the interrupter. The HLC2705 is designed to work with a mechanical period as small as 0.036 in.(0.914 mm), providing resolution to 0.018 in.(0.457 mm).

### OUTLINE DIMENSIONS in inches (mm)

Tolerance 3 plc decimals ±0.005(0.12)  
2 plc decimals ±0.020(0.51)

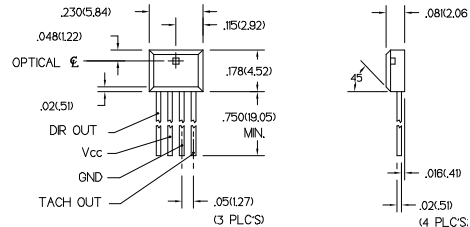

DIM\_031.cdr

# HLC2705

## Encoder Detector

### ELECTRICAL CHARACTERISTICS (-40°C to +85°C unless otherwise noted)

PARAMETER	SYMBOL	MIN	TYP	MAX	UNITS	TEST CONDITIONS
Operating Supply Voltage	V <sub>CC</sub>	4.5	5.5		V	
Turn-on Threshold Irradiance HLC2705-001	E <sub>ET(+)</sub>	0.05	2.0		mW/cm <sup>2</sup>	V <sub>CC</sub> =5 V, T <sub>A</sub> =25°C (1)
Supply Current	I <sub>CC</sub>		12.0		mA	V <sub>CC</sub> =5.25 V
Tach Output, inactive	V <sub>OL,TACH</sub>	4.5			V	V <sub>CC</sub> =5 V, I <sub>OH</sub> =0
Tach Pulse Level, active			0.4		V	V <sub>CC</sub> =5 V, I <sub>OL</sub> =1.6 mA
Direction Output, B leads A	V <sub>OH,DIR</sub>	2.4			V	V <sub>CC</sub> =5 V, I <sub>OH</sub> =10 µA
Direction Output, A leads B	V <sub>OL,DIR</sub>		0.4		V	V <sub>CC</sub> =5 V, I <sub>OL</sub> =1.6 mA
Tach Pulse Width	T <sub>PW</sub>	3.0	20		µs	V <sub>CC</sub> =5 V, I <sub>OL</sub> =1.6 mA
Operate Point Temperature Coefficient	O <sub>PTC</sub>		-0.76		%/°C	Emitter @ Constant Temperature

#### Notes

- The radiation source is an IRED with a peak wavelength of 880 nm.

### ABSOLUTE MAXIMUM RATINGS

(25°C Free-Air Temperature unless otherwise noted)

Duration of Output

Short to V <sub>CC</sub> or Ground	1.0 sec.
Operating Temperature Range	-40°C to 85°C
Storage Temperature Range	-40°C to 85°C
Soldering Temperature (5 sec)	240°C


Honeywell reserves the right to make changes in order to improve design and supply the best products possible.

# Honeywell

# HLC2705

## Encoder Detector

### FUNCTIONAL BLOCK DIAGRAM

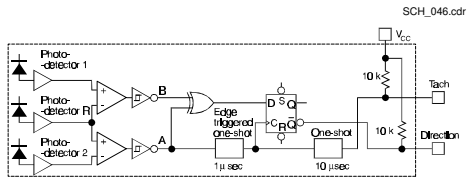

### OUTPUT TIMING DIAGRAM

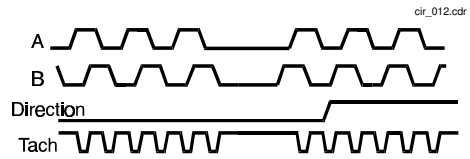


Fig. 1 Responsivity vs Angular Displacement


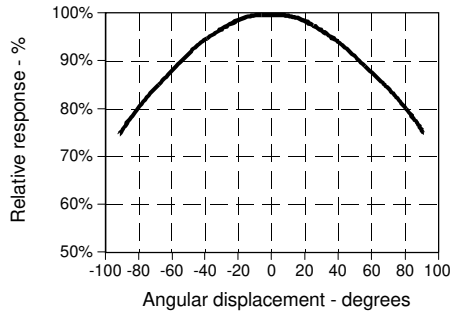


Fig. 2 Threshold Irradiance vs Temperature

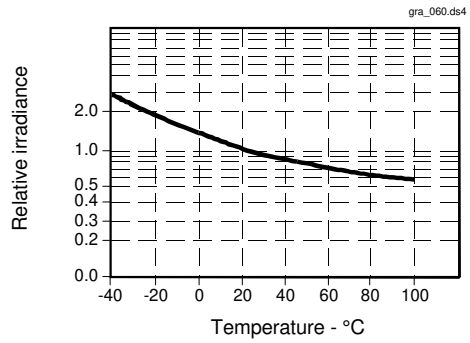

All Performance Curves Show Typical Values

**HLC2705**  
Encoder Detector

---



Honeywell reserves the right to make changes in order to improve design and supply the best products possible.

**Honeywell**