



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



## GaAs MMIC SMT DOUBLE-BALANCED MIXER, 1.7 - 4.5 GHz



### Typical Applications


The HMC175MS8 / HMC175MS8E is ideal for:

- Mini-Base Stations
- Portable Wireless
- PCMCIA

### Features

- Ultra Small Package: MSOP8
- Conversion Loss: 8 dB
- LO / IF Isolation: 32 dB
- LO / RF Isolation: 30 dB
- Input IP3: +18 dBm

### Functional Diagram

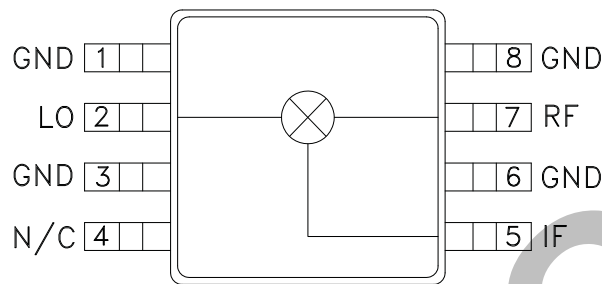

### General Description

The HMC175MS8 & HMC175MS8E are miniature double-balanced mixers in 8-lead plastic surface mount Mini Small Outline Packages (MSOP). The device can be used as an upconverter or downconverter. The mixer provides exceptional isolation and intermodulation performance for applications in high signal density environments. This device can also be used as a biphase modulator or demodulator. The MSOP8 is the smallest footprint available for a complete double-balanced mixer (0.118" x 0.190" x 0.040").


### Electrical Specifications, $T_A = +25^\circ \text{C}$ , LO Drive = +13 dBm

Parameter	Broadband			PCS Band			ISM Band			Units
	Min.	Typ.	Max.	Min.	Typ.	Max.	Min.	Typ.	Max.	
Frequency Range, RF & LO	1.7 - 4.5			1.7 - 2.0			2.2 - 2.6			GHz
Frequency Range, IF	DC - 1.0			DC - 1.0			DC - 1.0			GHz
Conversion Loss		8	11		9	11		8	10	dB
Noise Figure (SSB)		8	11		9	11		8	10	dB
LO to RF Isolation	25	30		35	40		30	35		dB
LO to IF Isolation	27	32		28	32		28	32		dB
IP3 (Input)	15	20		15	18		15	18		dBm
1 dB Gain Compression (Input)	9	12		9	11		9	11		dBm




**GaAs MMIC SMT DOUBLE-BALANCED MIXER, 1.7 - 4.5 GHz**


**Conversion Gain vs Temperature @ LO = +13 dBm**

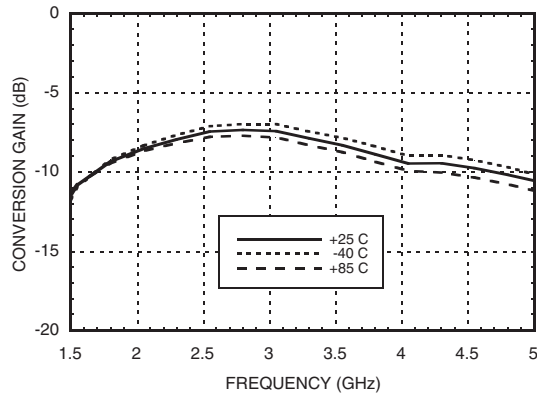


**Isolation @ LO = +13 dBm**

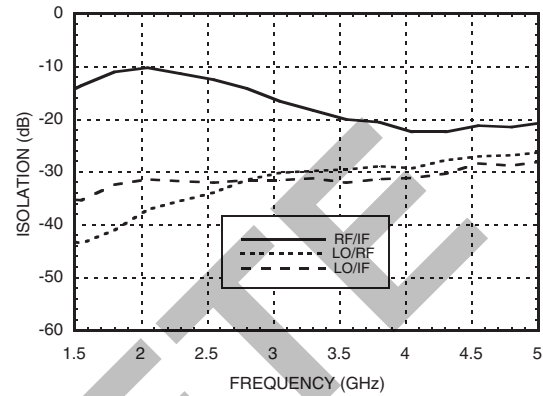


**Conversion Gain vs LO Power**

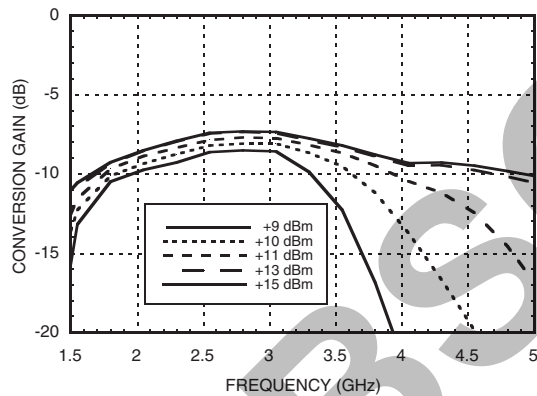


**IF Bandwidth @ LO = +13 dBm**

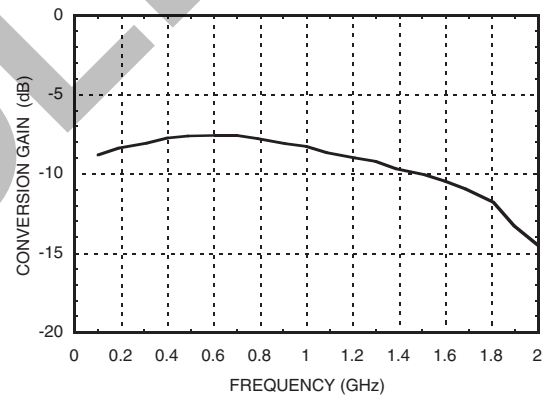

**Return Loss @ LO = +13 dBm**

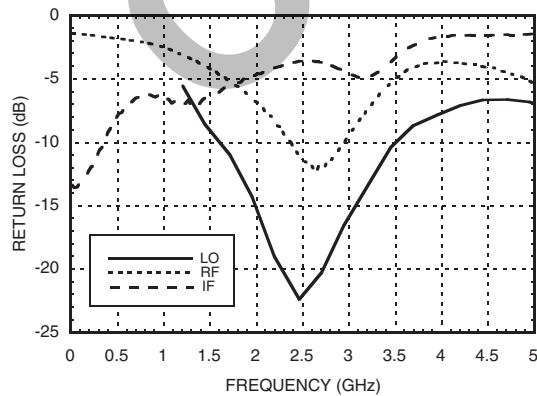

**P1dB vs Temperature @ LO = +13 dBm**

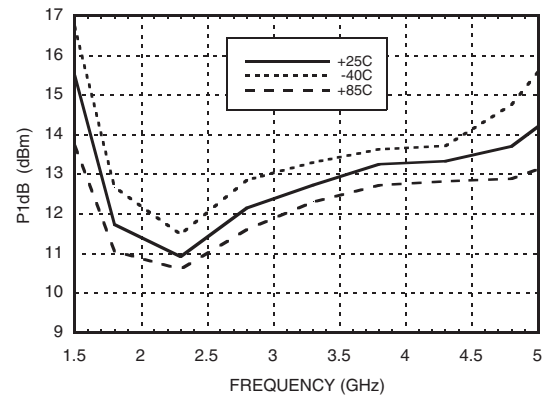


Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners.

For price, delivery, and to place orders: Analog Devices, Inc., One Technology Way, P.O. Box 9106, Norwood, MA 02062-9106 Phone: 781-329-4700 • Order online at [www.analog.com](http://www.analog.com) Application Support: Phone: 1-800-ANALOG-D




**GaAs MMIC SMT DOUBLE-BALANCED MIXER, 1.7 - 4.5 GHz**


**Input IP3 vs. LO Drive**

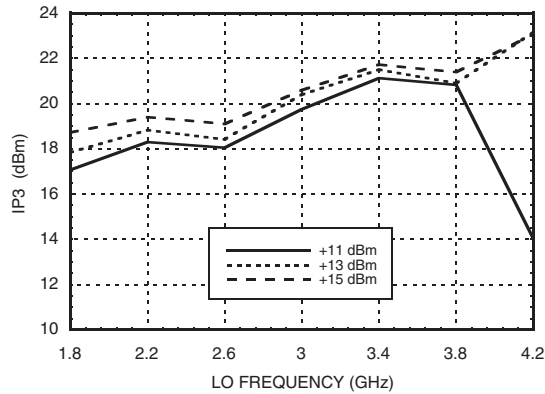


**Input IP3 vs. Temperature @ LO = +13 dBm**

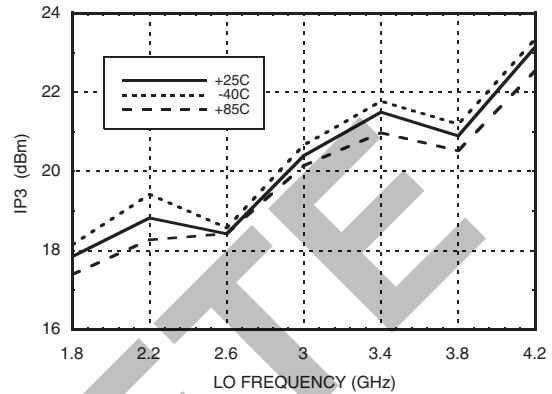

**Input IP2 vs. LO Drive**

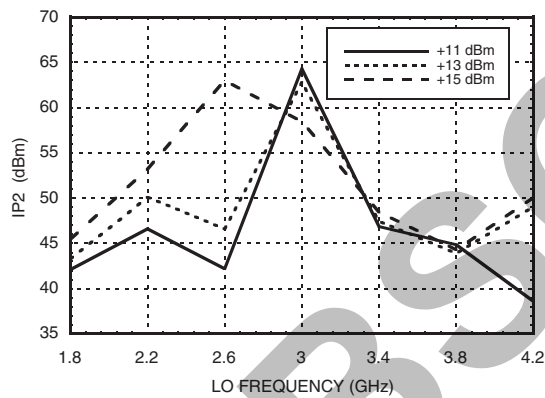

**Input IP2 vs. Temperature @ LO = +13 dBm**

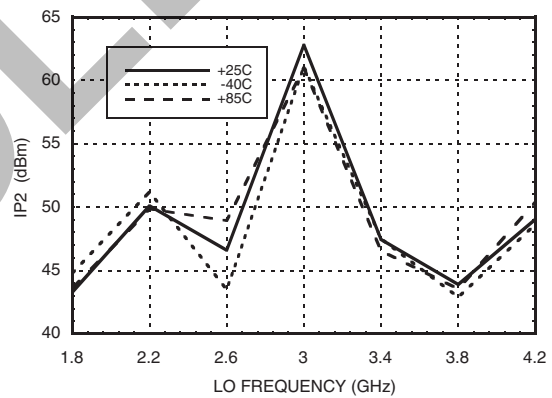

**MxN Spurious Outputs**

RF Frequency = 2.3 GHz @ -10 dBm					
LO Frequency = 2.4 GHz @ 13 dBm					
		nLO			
mRF	0	1	2	3	4
0	xx	1	12	12	37
1	4	0	27	39	38
2	74	53	56	60	67
3	78	>105	73	72	79
4	>105	>105	>105	>105	>105

All values in dBc below IF power level.

**Harmonics of LO**

LO Freq. (GHz)	nLO Spur at RF Port			
	1	2	3	4
1.8	37	32	63	53
2.2	35	30	37	63
2.6	32	28	33	55
3	30	29	53	52
3.1	29	30	56	51
3.6	29	39	52	53
4.2	27	46	48	61

LO = +13 dBm  
Values in dBc below input LO level measured at RF Port.

## GaAs MMIC SMT DOUBLE-BALANCED MIXER, 1.7 - 4.5 GHz




### Absolute Maximum Ratings

RF / IF Input	+13 dBm
LO Drive	+27 dBm
Storage Temperature	-65 to +150 °C
Operating Temperature	-40 to +85 °C
ESD Sensitivity (HBM)	Class 1A



**ELECTROSTATIC SENSITIVE DEVICE  
OBSERVE HANDLING PRECAUTIONS**

### Outline Drawing

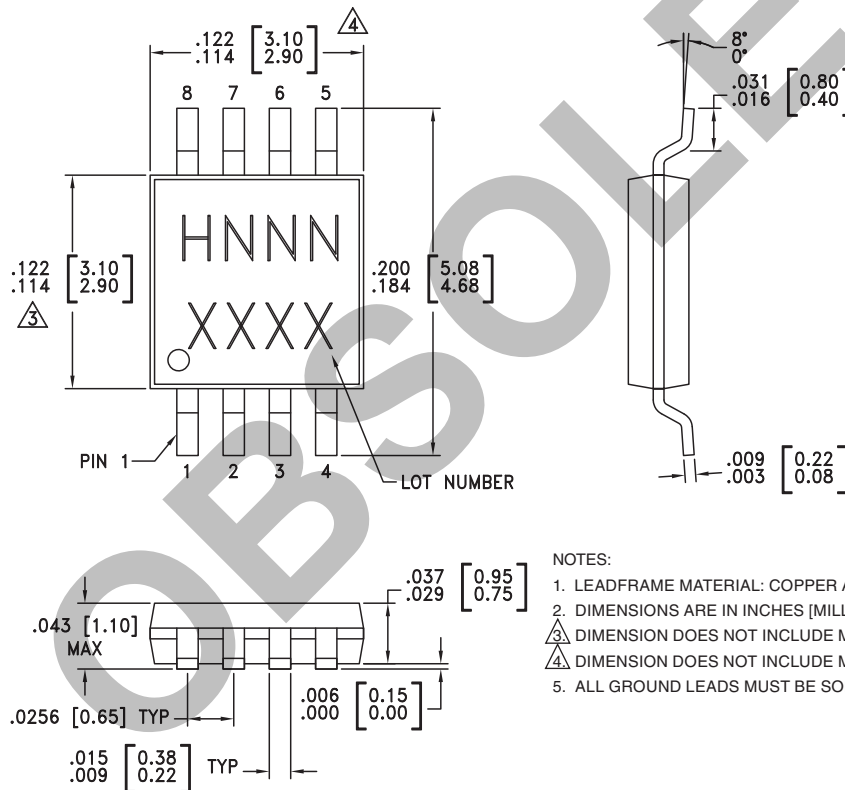

### Package Information

Part Number	Package Body Material	Lead Finish	MSL Rating	Package Marking <sup>[3]</sup>
HMC175MS8	Low Stress Injection Molded Plastic	Sn/Pb Solder	MSL1 <sup>[1]</sup>	H175 XXXX
HMC175MS8E	RoHS-compliant Low Stress Injection Molded Plastic	100% matte Sn	MSL1 <sup>[2]</sup>	H175 XXXX

[1] Max peak reflow temperature of 235 °C

[2] Max peak reflow temperature of 260 °C


[3] 4-Digit lot number XXXX

Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners.

For price, delivery, and to place orders: Analog Devices, Inc., One Technology Way, P.O. Box 9106, Norwood, MA 02062-9106 Phone: 781-329-4700 • Order online at [www.analog.com](http://www.analog.com) Application Support: Phone: 1-800-ANALOG-D



**Evaluation Circuit Board**

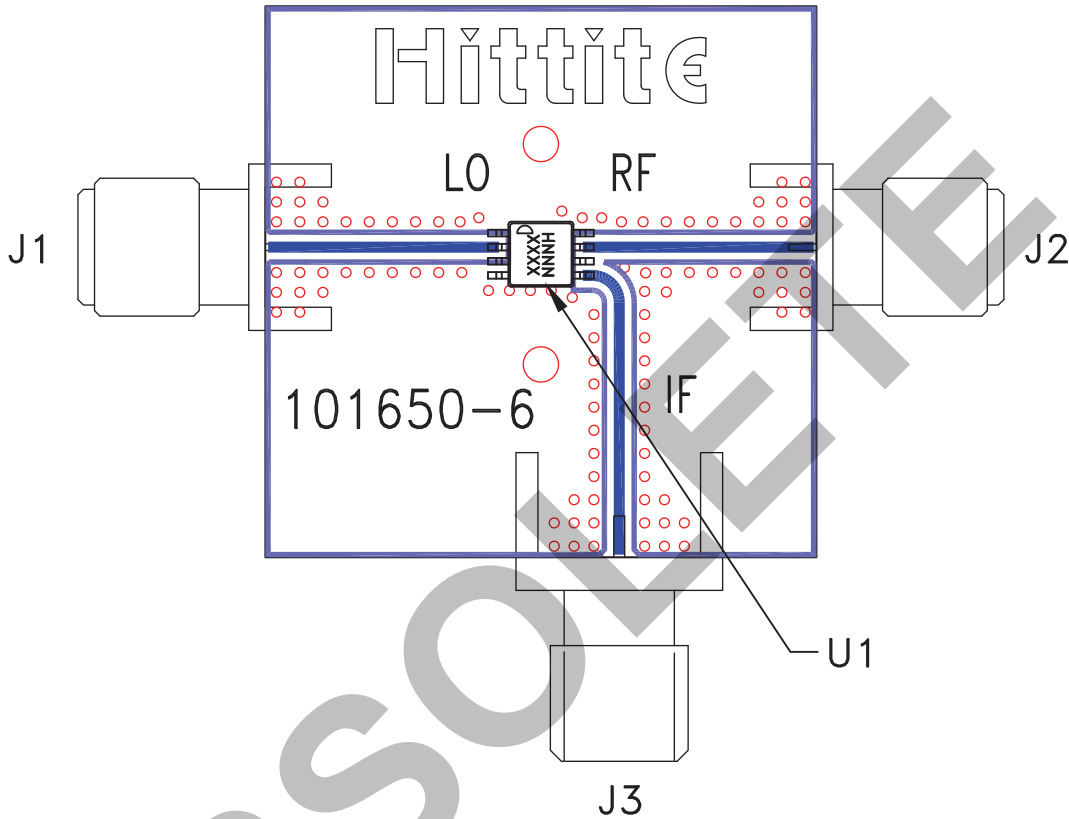

**List of Materials for Evaluation PCB 103350 [1]**

Item	Description
J1 - J3	PCB Mount SMA RF Connector
U1	HMC175MS8 / HMC175MS8E Mixer
PCB [2]	101650 Evaluation Board

[1] Reference this number when ordering complete evaluation PCB

[2] Circuit Board Material: Rogers 4350

The circuit board used in the final application should use RF circuit design techniques. Signal lines should have 50 ohm impedance while the package ground leads and exposed paddle should be connected directly to the ground plane similar to that shown. A sufficient number of via holes should be used to connect the top and bottom ground planes. The evaluation circuit board shown is available from Hittite upon request.

**Notes:**

OBSOLETE