



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Proximity Sensors Inductive Long Body, Stainless Steel Types IA, M8



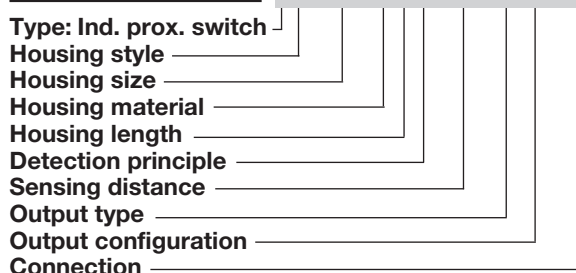
- Miniature stainless steel housing (cable or M8/M12 plug)
- Long body
- Sensing distance: 1,5 mm or 2,5 mm
- Power supply: 10 to 30 VDC
- Output: Transistor NPN/PNP, normally open or normally closed
- Protection: Short-circuit
- LED-indication for output ON
- 2 m PVC cable, M8 or M12 plug



Product Description

Inductive proximity sensor with long body. Output configuration for NPN/PNP with both NO and NC types as standard. M8 stainless steel housing with 2 m PVC cable or M8/M12 plug.

Ordering Key IA 08 BLF 15 NO M5



Type Selection


Rated operating dist. (S _n)	Conn. type	Ordering no. Transistor NPN Normally open	Ordering no. Transistor NPN Normally closed	Ordering no. Transistor PNP Normally open	Ordering no. Transistor PNP Normally closed
1.5 mm ¹⁾	Cable	IA 08 BLF 15 NO	IA 08 BLF 15 NC	IA 08 BLF 15 PO	IA 08 BLF 15 PC
1.5 mm ¹⁾	Plug M8	IA 08 BLF 15 NO M5		IA 08 BLF 15 PO M5	IA 08 BLF 15 PC M5
2.5 mm	Cable	IA 08 BLN 25 NO	IA 08 BLN 25 NC	IA 08 BLN 25 PO	IA 08 BLN 25 PC
2.5 mm	Plug M8	IA 08 BLN 25 NO M5		IA 08 BLN 25 PO M5	IA 08 BLN 25 PC M5
1.5 mm ¹⁾	Plug M12	IA 08 BLF 15 NO M1	IA 08 BLF 15 NC M1	IA 08 BLF 15 PO M1	IA 08 BLF 15 PC M1
2.5 mm	Plug M12	IA 08 BLN 25 NO M1	IA 08 BLN 25 NC M1	IA 08 BLN 25 PO M1	IA 08 BLN 25 PC M1

¹⁾ For flush mounting in metal

Specifications


Rated operational volt. (U _B)	10 to 30 VDC (ripple included)	Ambient temperature	
Ripple	≤ 10%	Operating	-25° to +70°C (-13° to +158°F)
Rated operational current (I _a)		Storage	-30° to +75°C (-22° to +167°F)
Continuous	≤ 200 mA @ + 25°C (+75°F)	Degree of protection	IP 67 (Nema 1, 3, 4, 6, 13)
No-load supply current (I _o)	≤ 10 mA (ON)	Housing material	Stainless steel, AISI 303
Voltage drop (U _d)	< 2,5 V (@ I _{max})	CE-marking	Yes
Protection	Short circuit	Connection	
Frequency of operating cycles (f)	2000 Hz	IA08BL....O/C	Cable, 2 m, PVC, AWG 26, oil proof
Indication for output ON	LED, yellow	IA08BL....O/C M5	Plug M8, CONB53 series
Repeat Accuracy	≤ 5%	IA08BL....O/C M1	Plug M12, CONB1 series
Effective operating dist. (S _r)	0.9 x S _n ≤ S _r ≤ 1.1 x S _n	Weight (cables/nuts included)	
Usable operating dist. (S _u)	0.85 x S _r ≤ S _u ≤ 1.15 x S _r	Al...	36 g
		Al...M1/M5	11 g

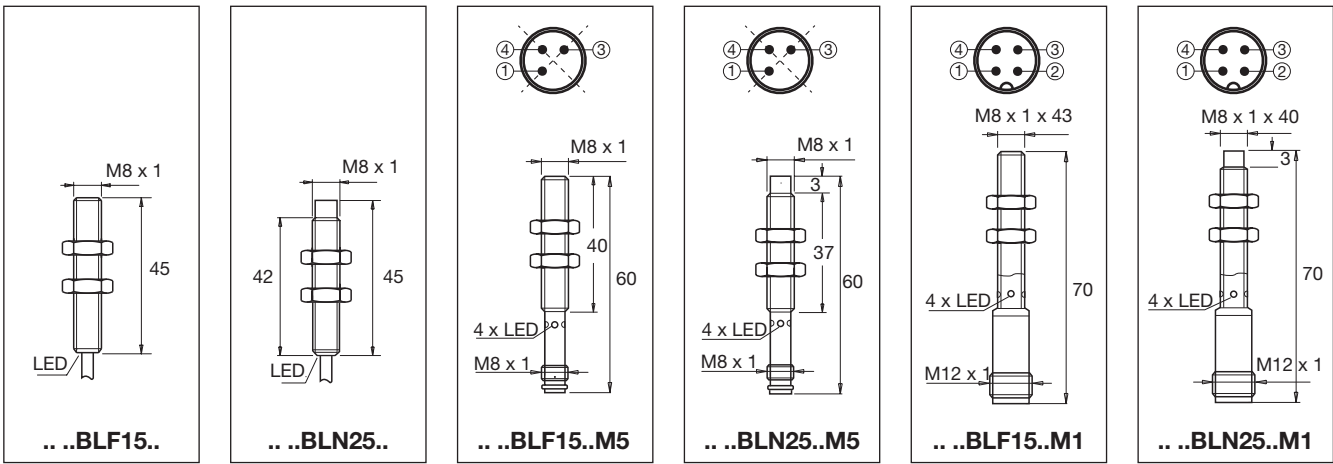Dimensions




Wiring Diagrams





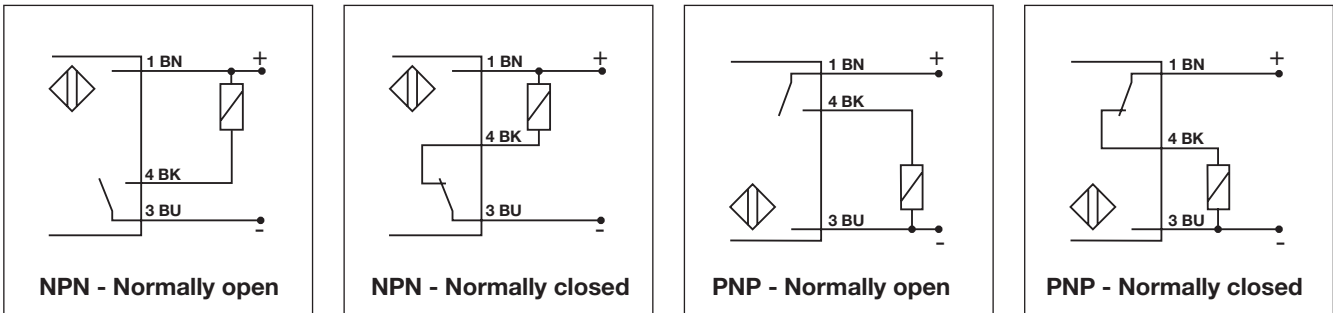
IA08BL..... - IA08BL.....M5



IA08BL.....M1

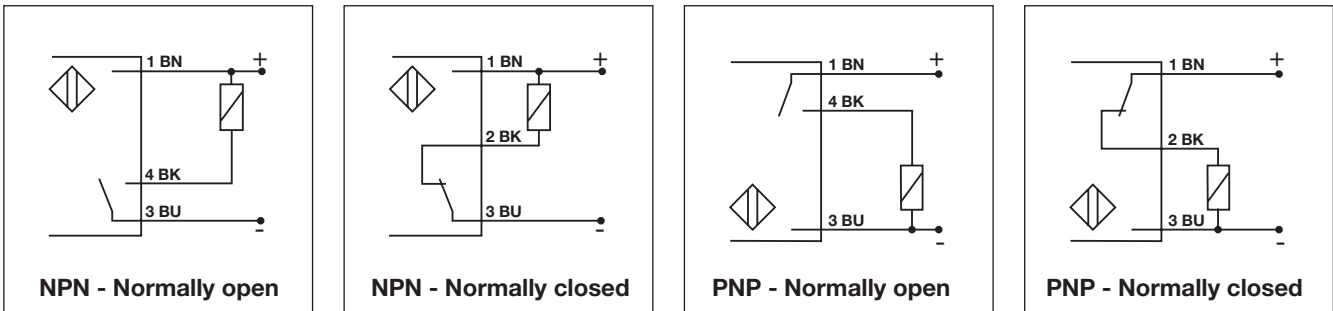

Installation Hints
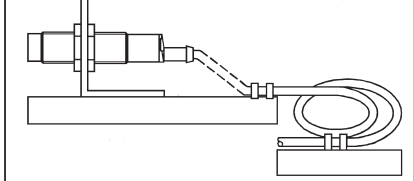
<p>To avoid interference from inductive voltage/current peaks, separate the prox. switch power cables from any other power cables, e.g. motor, contactor or solenoid cables</p> 	<p>Relief of cable strain</p> <p>Incorrect</p>  <p>Correct</p>  <p>The cable should not be pulled</p>	<p>Protection of the sensing face</p>  <p>A proximity switch should not serve as mechanical stop</p>	<p>Switch mounted on mobile carrier</p>  <p>Any repetitive flexing of the cable should be avoided</p>
--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------