



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!




Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



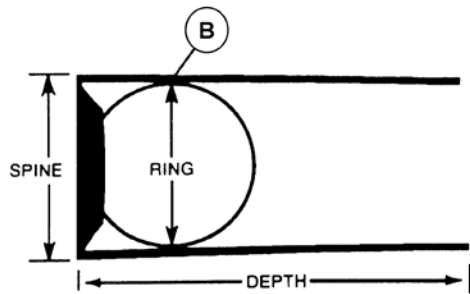


ITEM	SPINE	RING	DEPTH
07405	1.2"	0.5"	10"
07410	1.7"	1"	10.3"
07412	2.3"	1.5"	10.6"
07415	2.9"	2"	11.5"
07420	4.2"	3"	12"

Spine size is the shelf space requirement of the binder.

Depth is the shelf depth requirement of the binder.

"It should be understood that any object, item, material or person could be a source of static electricity in the work environment. Removal of unnecessary nonconductors, replacing nonconductive materials with dissipative or conductive materials and grounding all conductors are the principle methods of controlling static electricity in the workplace, regardless of the activity."
 [ESD Handbook ESD TR20.20-2008 section 2.4 Sources of Static Electricity]

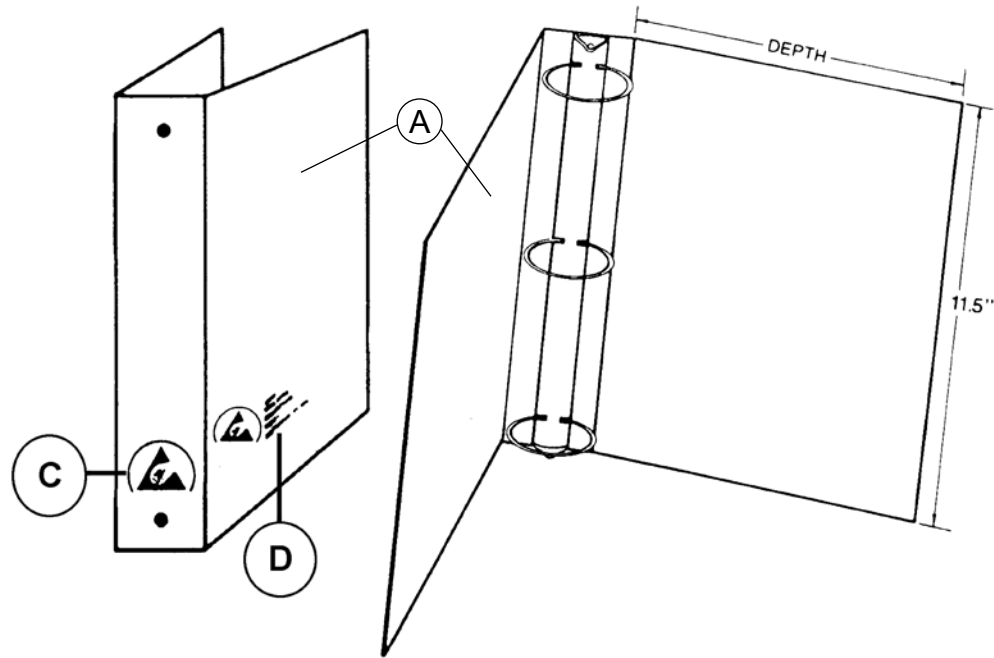

- A. MATERIAL 16 mil (0.016") light blue static dissipative vinyl over chipboard stiffener. Heat sealed on all edges. Surface Resistance = $<1 \times 10^{11}$ Ohms per ANSI/ESD S11.11. Static Decay = <0.30 seconds
- B. Ring constructed of nickel plated steel. Ring size is the inside diameter of the ring and indicates the capacity of the binder to hold material.
- C. On the lower spine is hot stamped the ESD protective symbol.
- D. On the lower left front is hot stamped the ESD protective symbol, the Static Dissipative Binder RTT: $<1 \times 10^{11}$ ohms Made in USA Desco Industries Inc. Canton MA, Chino CA, Marlboro MA

BINDER, VINYL, STATIC DISSIPATIVE, BLUE, 3 RING

DESCO

DESCO WEST: 3651 WALNUT AVE., CHINO, CA 91710 WEB SITE: Desco.com
 PHONE (909) 627-8178 FAX (909) 627-7449 FAX REQUEST (909) 627-7126
 DESCO EAST: ONE COLGATE WAY, CANTON, MA 02021-1407
 PHONE (781) 821-8370 FAX (781) 575-0172

DRAWING NUMBER
07405

DATE:
March
2010