



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!




Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



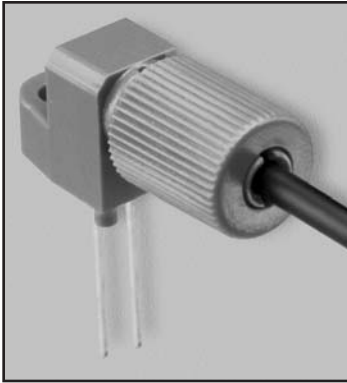

DESCRIPTION

The IF-E96 is a low-cost, high-speed, visible red LED housed in a “connector-less” style plastic fiber optic package. The output spectrum is produced by a GaAlAs die which peaks at 660 nm, one of the optimal transmission windows of PMMA plastic optical fiber. The device package features an internal micro-lens and a precision-molded PBT housing to maximize optical coupling into standard 1000 μm core plastic fiber cable.

APPLICATION HIGHLIGHTS

The performance/price ratio of the IF-E96 is particularly attractive for high volume design applications. The visible red output has low attenuation in PMMA plastic fiber and aids in troubleshooting installations. When used with an IF-D96 photologic detector the IF-E96 can achieve data rates of 5 Mbps. Fast transition times and low attenuation make the IF-E96 an excellent device selection for low cost analog and digital data links up to 75 meters.

APPLICATIONS

- ▶ Low Cost Analog and Digital Data Links
- ▶ Automotive Electronics
- ▶ Digitized Audio
- ▶ Medical instruments
- ▶ PC-to-Peripheral Data Links
- ▶ Robotics Communications
- ▶ Motor Controller Triggering
- ▶ EMC/EMI Signal Isolation
- ▶ Local Area Networks
- ▶ Intra-System Links: Board-to-Board, Rack-to-Rack

FEATURES

- ◆ High Performance at Low Cost
- ◆ Visible Red Output Aids Troubleshooting
- ◆ Low Transmission Loss with PMMA Plastic Fiber
- ◆ Fast Transition Times
- ◆ Mates with standard 1000 μm core jacketed plastic fiber cable
- ◆ No Optical Design required
- ◆ Internal Micro-Lens for Efficient Optical Coupling
- ◆ Inexpensive Plastic Connector Housing
- ◆ Connector-Less Fiber Termination
- ◆ Light-Tight Housing Provides Interference-Free Transmission
- ◆ RoHS Compliant

MAXIMUM RATINGS

($T_A=25^\circ\text{C}$)

Operating and Storage Temperature Range (T_{OP}, T_{STC})-40° to 85°C
Junction Temperature (T_J)85°C
Soldering Temperature (2 mm from case bottom) (T_S) $t \leq 5s$240°C
Reverse Voltage (V_R)5 V
Power Dissipation (P_{TOT}) $T_A=25^\circ\text{C}$60 mW
De-rate Above 25°C1.1 mW/°C
Forward Current, DC (I_F)35 mA
Surge Current (I_{FSM}) $t \leq 10 \mu s$150 mA

CHARACTERISTICS ($T_A=25^\circ\text{C}$)

Parameter	Symbol	Min.	Typ.	Max.	Unit
Peak Wavelength	λ_{PEAK}	650	660	670	nm
Spectral Bandwidth (50% of I_{MAX})	$\Delta\lambda$	–	20	–	nm
Output Power Coupled into Plastic Fiber (1 mm core diameter). Distance Lens to Fiber ≤ 0.1 mm, 1 m SH4001 fiber, $I_F=20$ mA	Φ_{min}	125 -9.0	200 -7.0	300 -5.2	μW dBm
Switching Times (10% to 90% and 90% to 10%) ($I_F=20$ mA)	t_r, t_f	–	.1	–	μs
Capacitance ($F=1$ MHz)	C_0	–	30	–	pF
Forward Voltage ($I_F=20$ mA)	V_f	–	–	1.8	V
Temperature Coefficient, λ_{PEAK}	TC_λ		0.2		nm/K

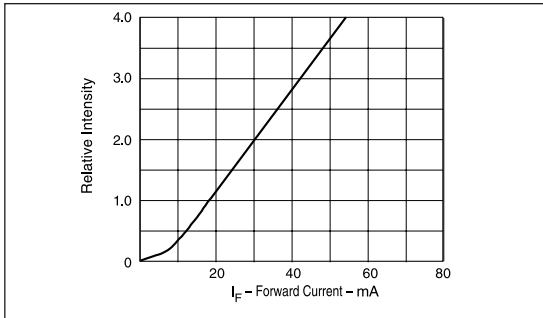


FIGURE 1. Normalized power launched versus forward current.

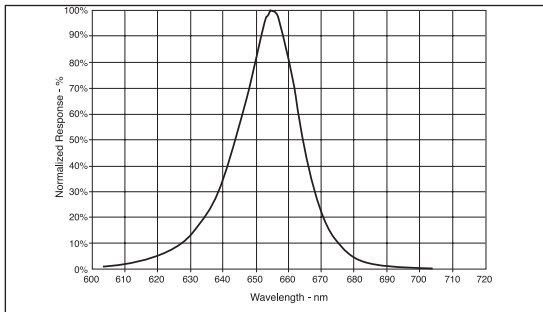


FIGURE 2. Typical spectral output versus wavelength.

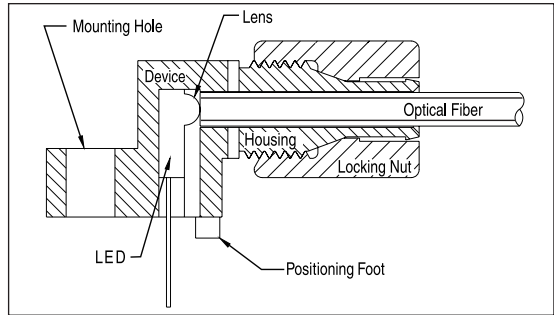


FIGURE 3. Cross-section of fiber optic device.

FIBER TERMINATION INSTRUCTIONS

1. Cut off the ends of the optical fiber with a single-edge razor blade or sharp knife. Try to obtain a precise 90-degree angle (square).
2. Insert the fiber through the locking nut and into the connector until the core tip seats against the internal micro-lens.
3. Screw the connector locking nut down to a snug fit, locking the fiber in place.

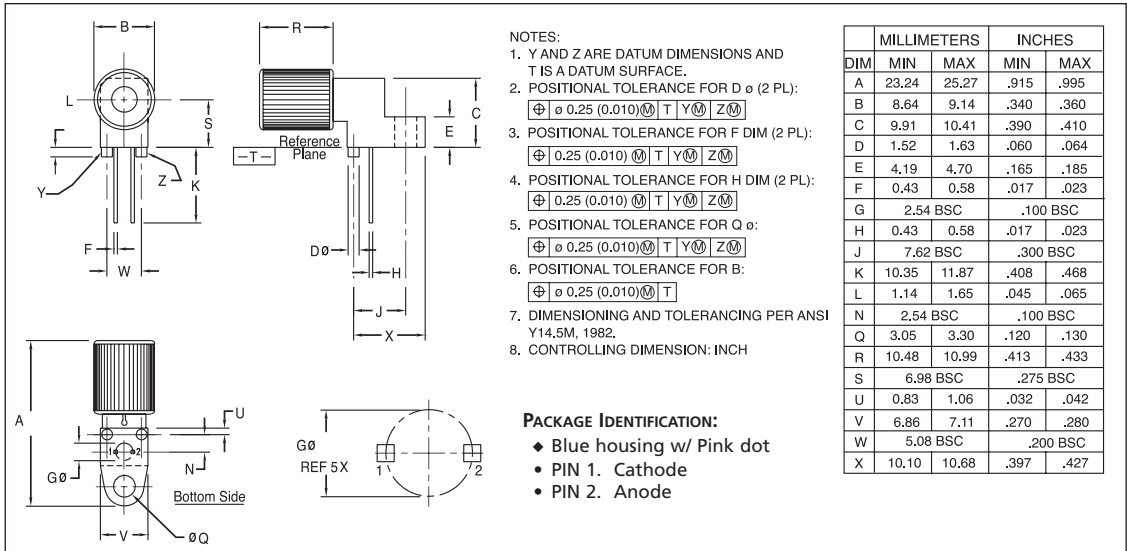


FIGURE 4. Case outline.