



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!




Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



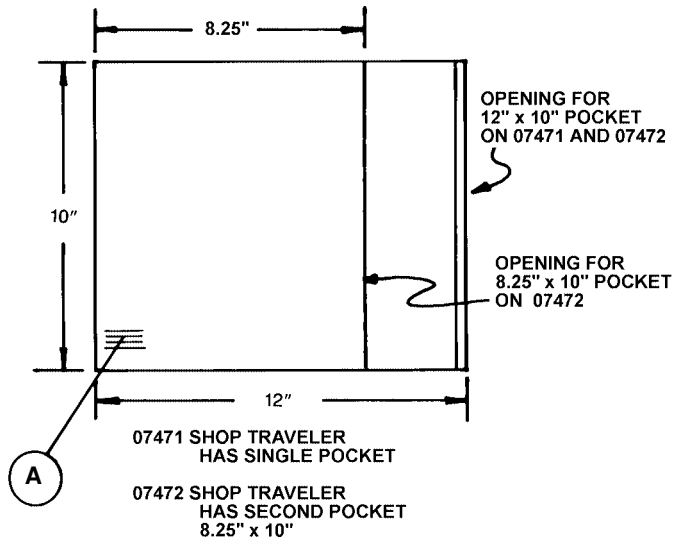

Description:

This product is designed for use in ESD controlled areas where there are electrostatic sensitive devices. All shop travelers are made from a stable, amine-free, clear, static dissipative polyethylene, 6 Mil thick film. Dissipative agent is extruded in and is slow blooming with an effective shelf life in excess of two years. These products are designed to hold an 8 1/2" x 11" sheet and can be cleaned for use in Class 100 Clean Rooms.

Humidity independent.
N-Octanoic Acid Free.
Does not promote corrosion.
Has no measurable outgassing.

Electrical Properties:

Static Decay:	< 1.0 sec.	per FTMS 101C, Method 4046
Surface Resistivity:	10 ¹⁰ - 10 ¹² Ohms/sq.	per ASTM D-257
Polycarbonate Haze:	Negligible	per 72 hour contact
Corrosivity:	Negligible	per FTMS 101C-3005

Specifications:

Melt Index:	.050 gm/10 min.	per ASTM D-1238
Density:	0.923 gm/cc	per ASTM D-1505
Haze:	10%	per ASTM D-1003
60° gloss:	90	per ASTM D-2457
45° gloss:	56	per ASTM D-2457
Dart impact:	230 gms	per ASTM D-1709
Coefficient of friction:	0.50	per ASTM D-1894

A. Both shop travelers are hot stamped with:

"STATIC SAFE
SHOP TRAVELER
DESCO INDUSTRIES
ITEM # _____"

SHOP TRAVELER, STATIC SAFE, 6 MIL

DESCO

DESCO WEST: 3651 WALNUT AVE., CHINO, CA 91710 WEB SITE: www.desco.com
PHONE (909) 627-8178 FAX (909) 627-7449 FAX REQUEST (909) 627-7126

DESCO EAST: 90 HUDSON RD, CANTON, MA 02021-1407
PHONE (781) 821-8370 FAX (781) 575-0172

DRAWING NUMBER
07471

DATE:
6/99