



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



400MHz Slew Rate Enhanced, Rail-to-Rail Output Gain Block

ISL55033

The [ISL55033](#) is a triple rail-to-rail output gain block with a -3dB bandwidth of 400MHz and slew rate of 2350V/μs into a 150Ω load. The ISL55033 has a fixed gain of +2. The inputs are capable of sensing ground. The outputs are capable of swinging to 0.45V to either rail through a 150Ω resistor connected to V+/2.

The ISL55033 is designed for general purpose video applications. The part includes a fast-acting global disable/power-down function.

The ISL55033 is available in a 12 Ld TQFN package. Operation is specified over the -40°C to +85°C temperature range.


Features

- 400MHz -3dB bandwidth
- 2350V/μs typ slew rate, $R_L = 150\Omega$ to $V+/2$
- Single-supply operation from +3V to +5.5V
- Rail-to-rail output
- Input ground sensing
- Fast 25ns disable time
- Pb-free (RoHS compliant)

Applications






- Video amplifiers
- Set-top boxes
- Video distribution

Pin Configuration

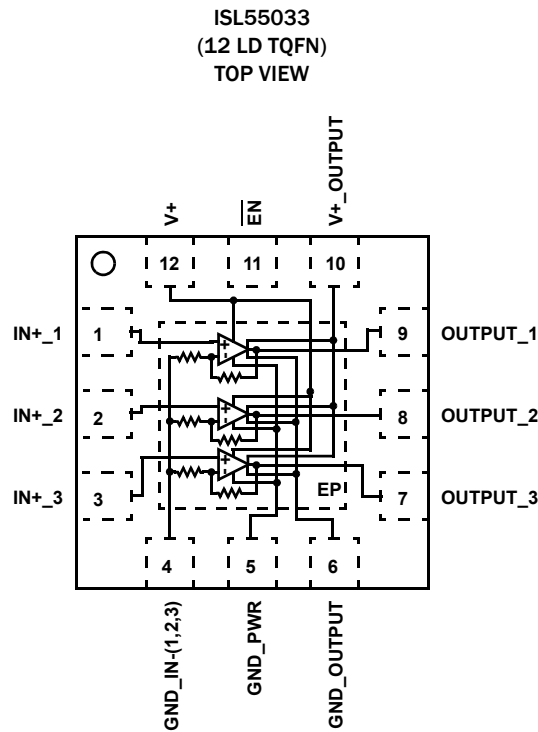

Pin Descriptions

| PIN NUMBER | PIN NAME | EQUIVALENT CIRCUIT | DESCRIPTION |
|------------|------------------------|---------------------|---|
| 1 | IN+_1 | Circuit 1 | Amplifier 1 noninverting input |
| 2 | IN+_2 | Circuit 1 | Amplifier 2 noninverting input |
| 3 | IN+_3 | Circuit 1 | Amplifier 3 noninverting input |
| 4 | GND_IN-(1, 2, 3) | Circuit 4 | Common input for amplifiers 1, 2, 3 inverting inputs |
| 5 | GND_PWR | Circuits 1, 2, 4, 5 | Power supply ground. This is also the potential of the exposed metal pad on the package bottom. |
| 6 | GND_OUTPUT | Circuit 3 | Output power supply ground |
| 7 | OUTPUT_3 | Circuit 3 | Amplifier 3 output |
| 8 | OUTPUT_2 | Circuit 3 | Amplifier 2 output |
| 9 | OUTPUT_1 | Circuit 3 | Amplifier 1 output |
| 10 | V+_OUTPUT | Circuit 3 | Output power supply |
| 11 | $\overline{\text{EN}}$ | Circuit 2 | Enable pin with internal pull-down: Logic "1" selects the disabled state; Logic "0" selects the enabled state |
| 12 | V+ | Circuits 1, 2, 4 | Positive power supply |
| EP | EP | Circuit 5 | Package's exposed thermal pad. Connect to GND_PWR. |

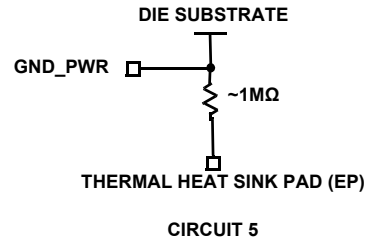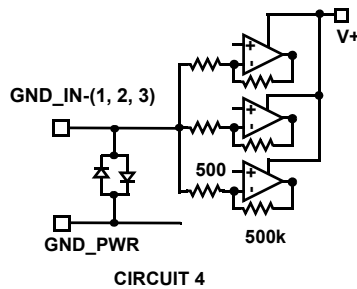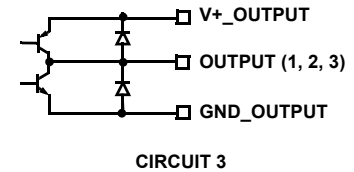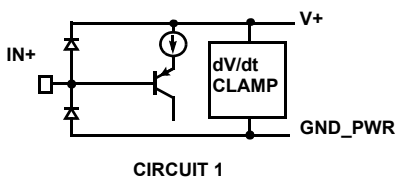

Ordering Information

| PART NUMBER (Note 1, 2, 3) | PART MARKING | TEMP RANGE (°C) | PACKAGE (RoHS Compliant) | PKG. DWG. # |
|---|--------------|--------------------|-----------------------------|----------------|
| ISL55033IRTZ | 5033 | -40 to +85 | 12 Ld TQFN | L12.3x3A |

NOTES:

1. Add "-T*" suffix for tape and reel. Please refer to [TB347](#) for details on reel specifications.
2. These Intersil Pb-free plastic packaged products employ special Pb-free material sets, molding compounds/die attach materials, and 100% matte tin plate plus anneal (e3 termination finish, which is RoHS compliant and compatible with both SnPb and Pb-free soldering operations). Intersil Pb-free products are MSL classified at Pb-free peak reflow temperatures that meet or exceed the Pb-free requirements of IPC/JEDEC J STD-020.
3. For Moisture Sensitivity Level (MSL), please see product information page for [ISL55033](#). For more information on MSL, please see tech brief [TB363](#).

ISL55033

Absolute Maximum Ratings (T_A = +25°C)

| | |
|----------------------------------|---------------------------|
| Supply Voltage from V+ to GND | 5.75V |
| Supply Turn-on Voltage Slew Rate | 1V/μs |
| EN Input Current | 4mA |
| Input Voltage | (V+) + 0.3V to GND - 0.3V |
| Continuous Output Current | 40mA |
| ESD Rating: | |
| Human Body Model | 2.5kV |
| Machine Model | 300V |
| Charge Device Model | 1.5kV |

Thermal Information

| | | |
|---------------------------------|---------------------------|------------------------|
| Thermal Resistance (Typical) | θ _{JA} (°C/W) | θ _{JC} (°C/W) |
| 12 Ld TQFN Package (Notes 4, 5) | 57 | 10 |
| Storage Temperature | -65°C to +125°C | |
| Pb-free Reflow Profile | see TB493 | |

Operating Conditions

| | |
|--|----------------|
| Ambient Operating Temperature Range (T _A) | -40°C to +85°C |
| Maximum Operating Junction Temperature (T _J) | +125°C |

CAUTION: Do not operate at or near the maximum ratings listed for extended periods of time. Exposure to such conditions may adversely impact product reliability and result in failures not covered by warranty.

4. θ_{JA} is measured with the component mounted on a high effective thermal conductivity test board in free air. See Tech Brief [TB379](#) for details.
5. For θ_{JC}, the “case temp” location is the center of the exposed metal pad on the package underside.

Electrical Specifications V+ = V+_OUTPUT = 5V, T_A = +25°C, R_L = 1kΩ to V+/2, V_{IN} = 0.1VDC, unless otherwise specified.

| PARAMETER | DESCRIPTION | TEST CONDITIONS | MIN (Note 7) | TYP | MAX (Note 7) | UNIT |
|-------------------------------|--|--|-----------------|------|-----------------|-------|
| INPUT CHARACTERISTICS | | | | | | |
| V _{OS} | Output Offset Voltage | (Note 6) | -9 | -1 | 9 | mV |
| TCV _{OS} | Offset Voltage Temperature Coefficient | Measured from -40°C to +85°C | | -3 | | μV/°C |
| I _B | Input Bias Current | V _{IN} = 0V | -8.5 | -6 | | μA |
| R _{IN} | Input Resistance | | | 7 | | MΩ |
| C _{IN} | Input Capacitance | | | 0.5 | | pF |
| OUTPUT CHARACTERISTICS | | | | | | |
| A _{CL} | Closed Loop Gain | V _{OUT} = 0.5V to 4V, R _L = 150Ω | 1.97 | 1.99 | 2.014 | V/V |
| R _{OUT} | Output Resistance | A _V = +2 | | 30 | | mΩ |
| V _{OH} | Positive Output Voltage Swing | R _L = 1kΩ to 2.5V | 4.7 | 4.75 | | V |
| | | R _L = 150Ω to 2.5V | 4.5 | 4.55 | | V |
| V _{OL} | Negative Output Voltage Swing | R _L = 1kΩ to 2.5V | | 27 | 50 | mV |
| | | R _L = 150Ω to 2.5V | | 130 | 200 | mV |
| I _{SC} (source) | Output Short-circuit Current | R _L = 10Ω to GND, V _{IN} = 1.5V | 50 | | | mA |
| I _{SC} (sink) | Output Short-circuit Current | R _L = 10Ω to + 2.5V, V _{IN} = 0V | 50 | | | mA |
| POWER SUPPLY | | | | | | |
| PSRR | Power Supply Rejection Ratio | V+ = 3V to 5.5V, R _L = Open | 65 | 83 | | dB |
| I _{S-ON} | Supply Current - Enabled | V _{IN} = 0.1V, R _L = Open | 18.5 | 21.3 | 24.5 | mA |
| I _{S-OFF} | Supply Current - All Amplifiers Disabled | R _L = Open | 275 | 486 | 900 | μA |
| ENABLE | | | | | | |
| t _{EN} | Enable Time | R _L = 150Ω, V _{IN} = 0.5V | | 250 | | ns |
| t _{DS} | Disable Time | R _L = 150Ω, V _{IN} = 0.5V | | 25 | | ns |
| V _{IL-ENB} | EN Pin Low Voltage for Power-up | | | 0.8 | | V |
| V _{IH-ENB} | EN Pin High Voltage for Shut-Down | | | 2 | | V |
| I _{IH-ENB} | EN Pin Input Current High | V _{EN} = 5V | 1 | 7 | 15 | μA |
| I _{IL-ENB} | EN Pin Input Current Low | V _{EN} = 0V | -10 | 2 | 10 | μA |

ISL55033

Electrical Specifications $V_+ = V_{+_OUTPUT} = 5V$, $T_A = +25^\circ C$, $R_L = 1k\Omega$ to $V_+/2$, $V_{IN} = 0.1VDC$, unless otherwise specified. (Continued)

| PARAMETER | DESCRIPTION | TEST CONDITIONS | MIN (Note 7) | TYP | MAX (Note 7) | UNIT |
|----------------------------|--|--|-----------------|-------|-----------------|----------------|
| AC PERFORMANCE | | | | | | |
| BW | -3dB Bandwidth | $V_{OUT} = 100mV_{P-P}$, $R_L = 150\Omega$, $C_L = 2pF$, $V_{IN} = 1.0VDC$ | | 400 | | MHz |
| BW | $\pm 0.1dB$ Bandwidth | $V_{OUT} = 100mV_{P-P}$, $R_L = 150\Omega$, $C_L = 2pF$ | | 60 | | MHz |
| Peak | Gain Peaking | $V_{OUT} = 100mV_{P-P}$, $R_L = 150\Omega$, $C_L = 3.2pF$ | | 1.5 | | dB |
| dG | Differential Gain | $V_{IN} = 0.1V$ to $2.0V$, $V_{OUT} = 100mV_{P-P}$, $f = 3.58MHz$, $R_L = 150\Omega$ | | 0.012 | | % |
| dP | Differential Phase | | | 0.11 | | ° |
| e_{N-OUT} | Output Voltage Noise Density | $f = 10kHz$ | | 35 | | nV/\sqrt{Hz} |
| i_N | Input Current Noise Density | $f = 10kHz$ | | 2.9 | | pA/\sqrt{Hz} |
| ISO | Off-state Isolation $f_0 = 10MHz$ | $V_{IN} = 0.8VDC + 1V_{P-P}$, $C_L = 2pF$, $R_L = 150\Omega$ | | -80 | | dB |
| X-TALK | Channel-to-channel Crosstalk, $f_0 = 10MHz$ | $V_{IN} = 0.8VDC + 1V_{P-P}$, $C_L = 2pF$, $R_L = 150\Omega$ | | -65 | | dB |
| PSRR | Power Supply Rejection Ratio $f_0 = 10MHz$ | $V_{IN} = 0.2VDC$, $V_{SOURCE} = 1V_{P-P}$, $C_L = 2pF$, $R_L = 150\Omega$ | | -55 | | dB |
| TRANSIENT RESPONSE | | | | | | |
| SR | Slew Rate 25% to 75% | $R_L = 150\Omega$, $V_{OUT} = 0.5V$ to $3.5V$ | | 2350 | | $V/\mu s$ |
| t_r , t_f Large Signal | Rise Time, t_r 20% to 80% | $V_{OUT} = 3V_{P-P}$, $R_L = 150\Omega$, $C_L = 2pF$ | | 0.8 | | ns |
| | Fall Time, t_f 80% to 20% | | | 0.7 | | ns |
| | Rise Time, t_r 20% to 80% | $V_{OUT} = 2V_{P-P}$, $R_L = 150\Omega$, $C_L = 2pF$ | | 0.6 | | ns |
| | Fall Time, t_f 80% to 20% | | | 0.6 | | ns |
| t_r , t_f Small Signal | Rise Time, t_r 20% to 80% | $V_{OUT} = 100mV_{P-P}$, $R_L = 150\Omega$, $C_L = 2pF$ | | 0.55 | | ns |
| | Fall Time, t_f 80% to 20% | | | 0.55 | | ns |
| OS | Overshoot | 100mV step | | 13 | | % |
| t_{PD} | Propagation Delay | 100mV step; $R_L = 150\Omega$ | | 1 | | ns |
| t_S | 0.1% Settling Time | 2V step | | 65 | | ns |

NOTES:

- V_{OS} is extrapolated from 2 output voltage measurements, with $V_{IN} = 62.5mV$ and $V_{IN} = 125mV$, $R_L = 1k$.
- Parameters with MIN and/or MAX limits are 100% tested at $+25^\circ C$, unless otherwise specified. Temperature limits established by characterization and are not production tested.

Typical Performance Curves

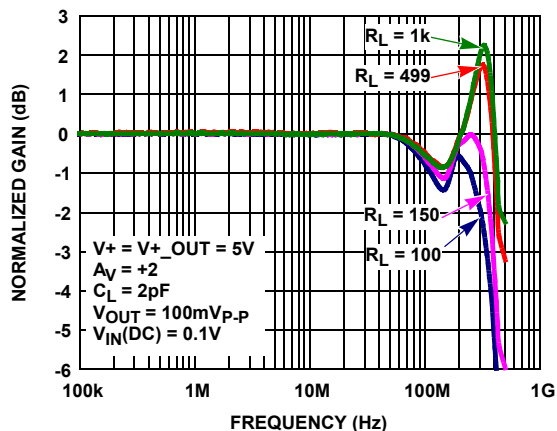


FIGURE 1. GAIN vs FREQUENCY FOR VARIOUS R_{LOAD}

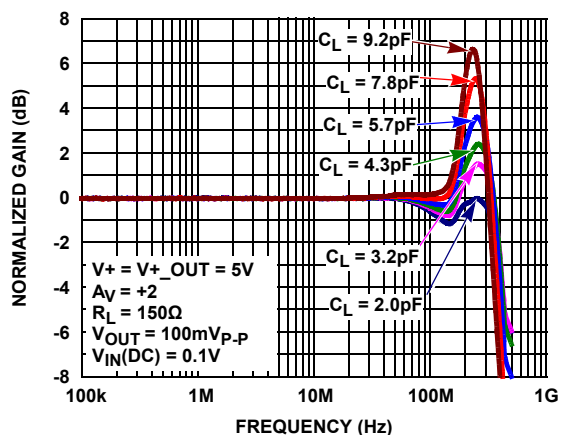


FIGURE 2. GAIN vs FREQUENCY FOR VARIOUS C_{LOAD}

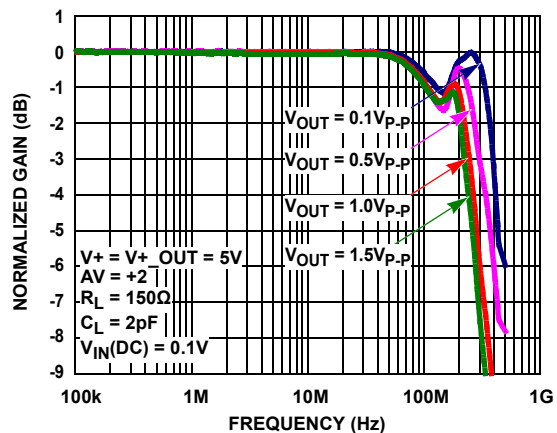


FIGURE 3. GAIN vs FREQUENCY FOR VARIOUS V_{OUT}

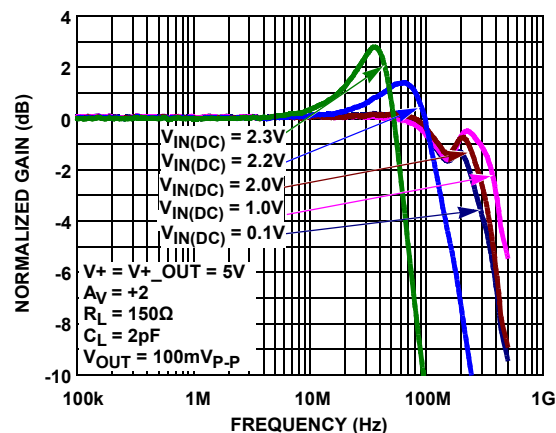


FIGURE 4. GAIN vs FREQUENCY FOR VARIOUS DC INPUT VOLTAGES

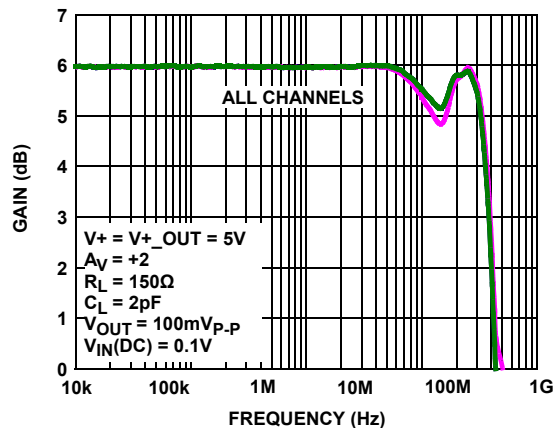


FIGURE 5. GAIN vs FREQUENCY - ALL CHANNELS

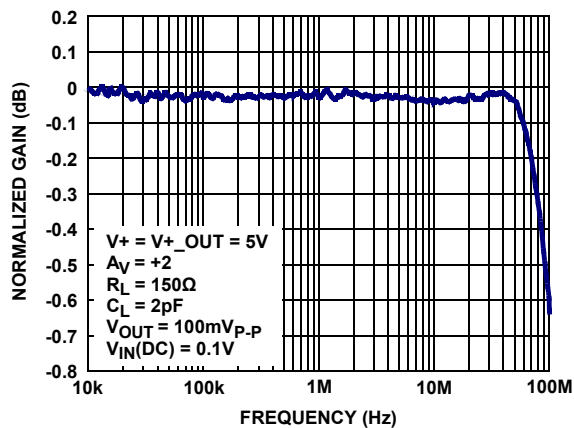


FIGURE 6. 0.1 dB GAIN FLATNESS

Typical Performance Curves (Continued)

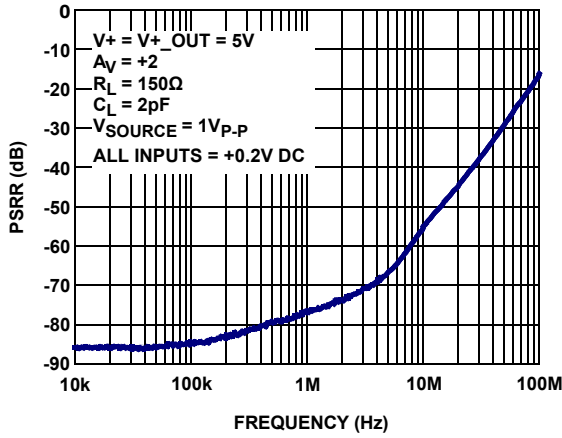


FIGURE 7. PSRR vs FREQUENCY

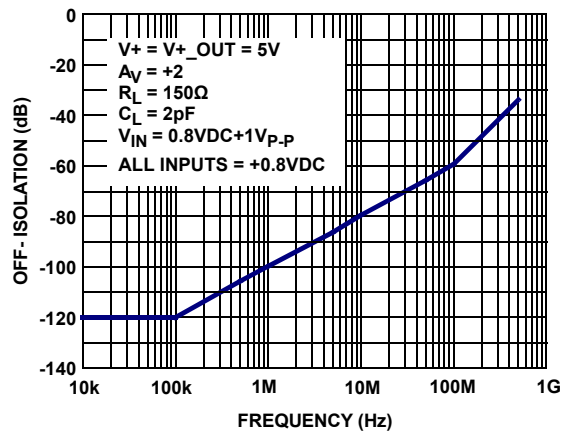


FIGURE 8. OFF-ISOLATION vs FREQUENCY

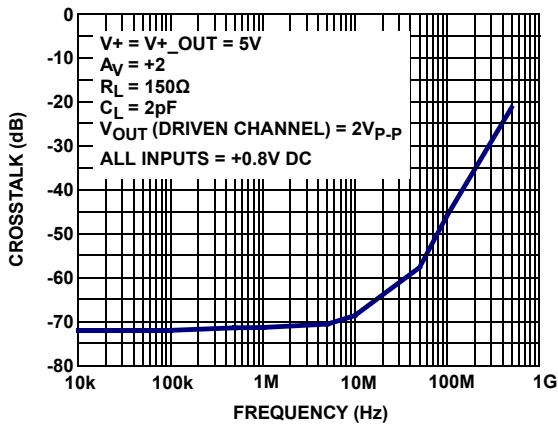


FIGURE 9. CHANNEL-TO-CHANNEL CROSSTALK vs FREQUENCY

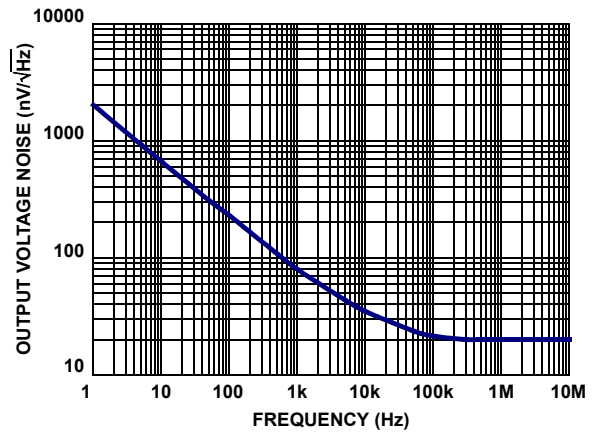


FIGURE 10. OUTPUT VOLTAGE NOISE DENSITY vs FREQUENCY

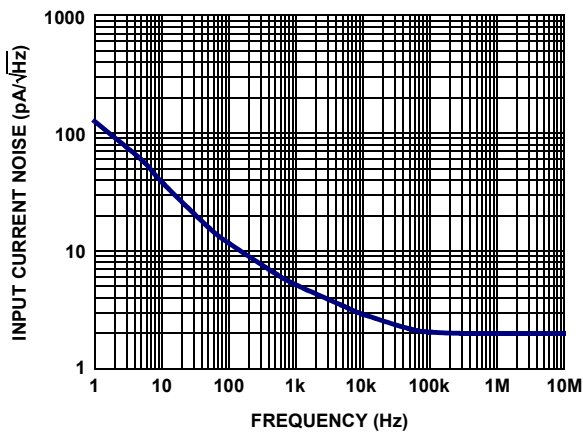


FIGURE 11. INPUT CURRENT NOISE DENSITY vs FREQUENCY

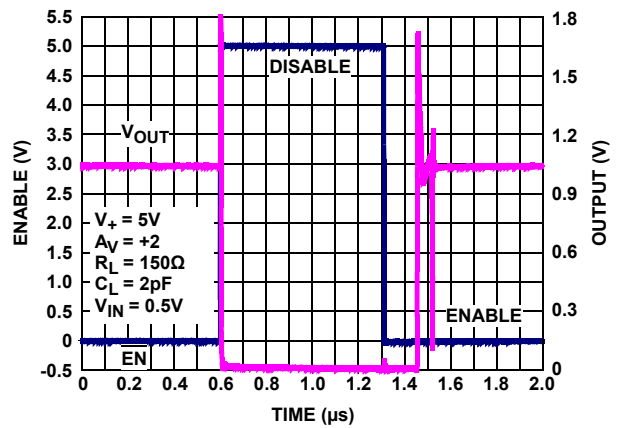


FIGURE 12. ENABLE/DISABLE TIMING

Typical Performance Curves (Continued)

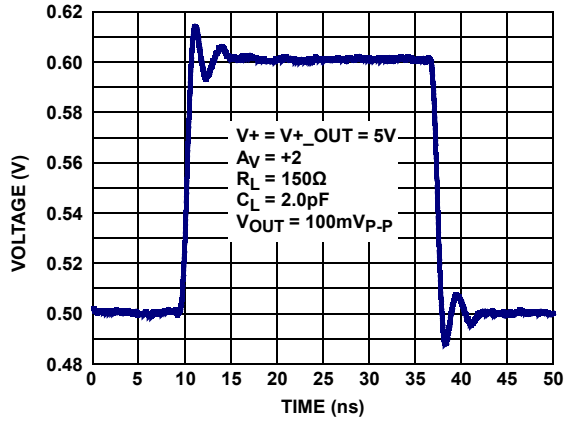


FIGURE 13. SMALL SIGNAL STEP RESPONSE

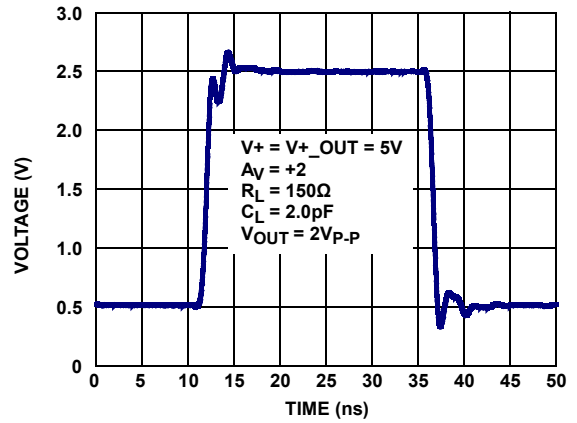


FIGURE 14. LARGE SIGNAL (2V_{p.p}) STEP RESPONSE

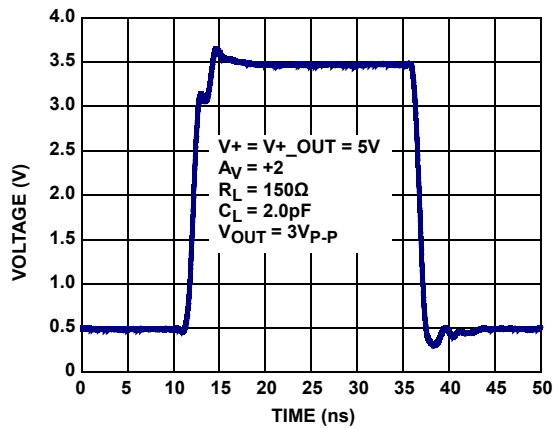


FIGURE 15. LARGE SIGNAL (3V_{p.p}) STEP RESPONSE

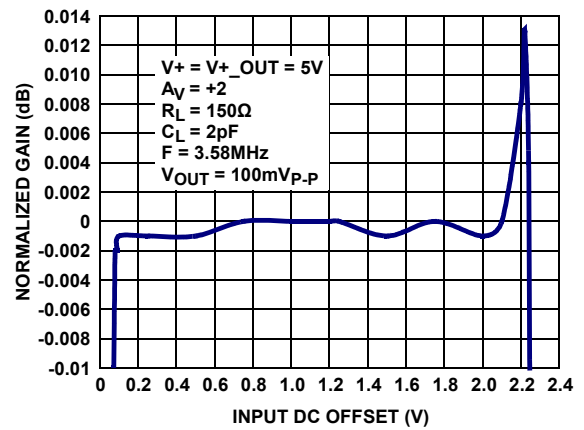


FIGURE 16. DIFFERENTIAL GAIN

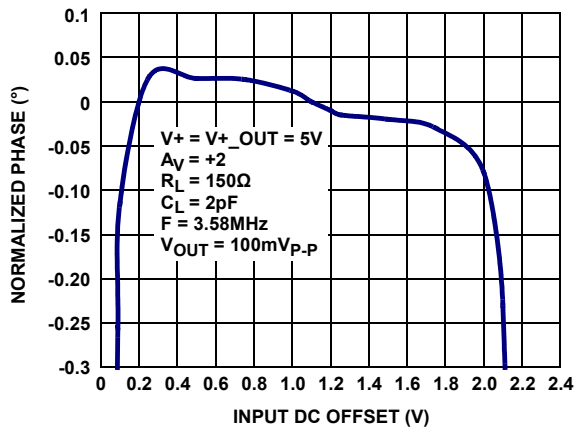


FIGURE 17. DIFFERENTIAL PHASE

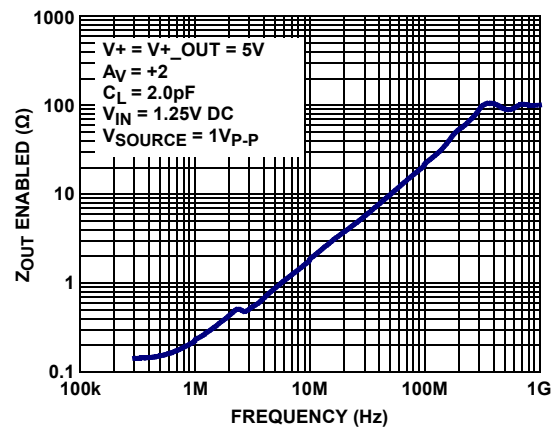


FIGURE 18. Z_{OUT} (ENABLED) vs FREQUENCY

Typical Performance Curves (Continued)

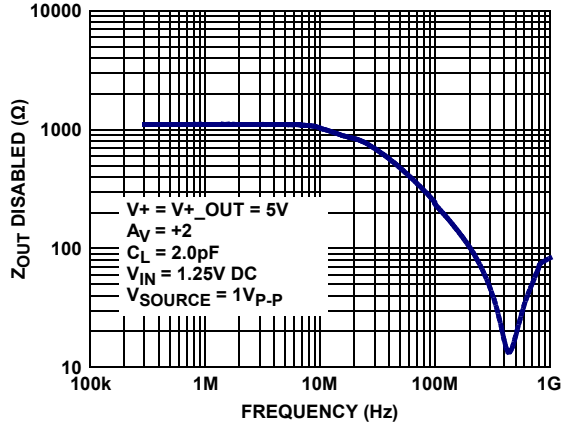


FIGURE 19. Z_{OUT} (DISABLED) vs FREQUENCY

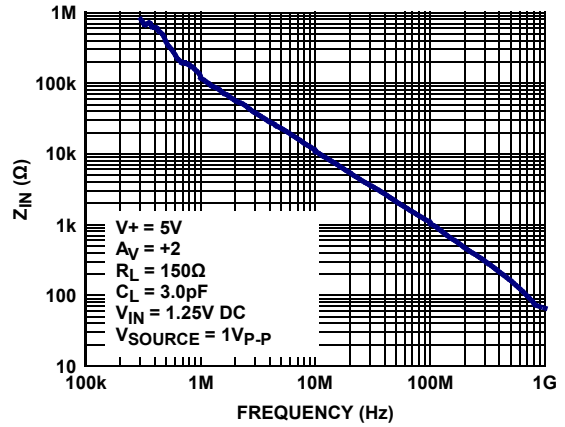


FIGURE 20. Z_{IN} vs FREQUENCY

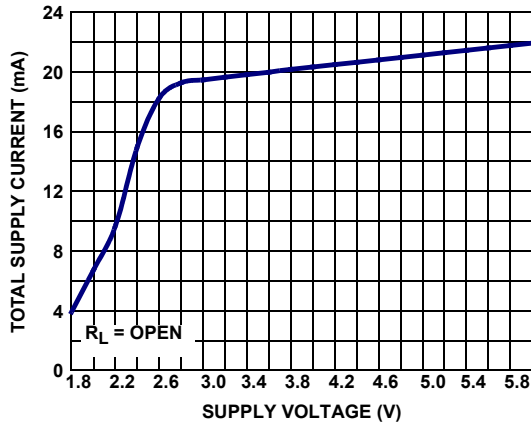


FIGURE 21. SUPPLY CURRENT vs SUPPLY VOLTAGE

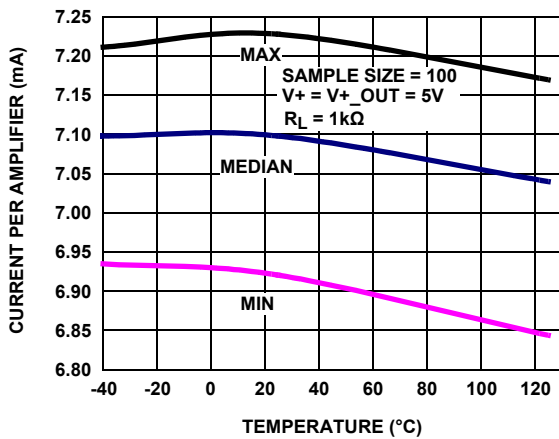


FIGURE 22. ENABLED SUPPLY CURRENT vs TEMPERATURE

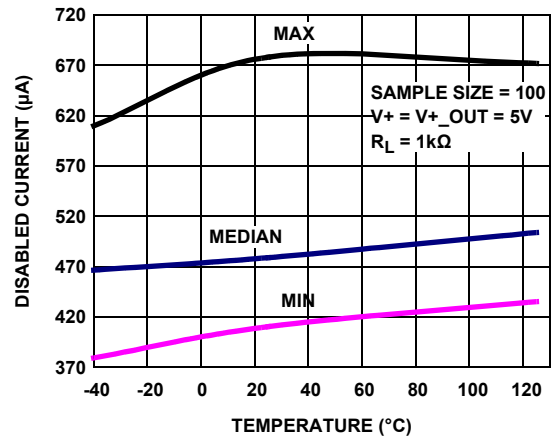


FIGURE 23. DISABLED SUPPLY CURRENT vs TEMPERATURE

Typical Performance Curves (Continued)

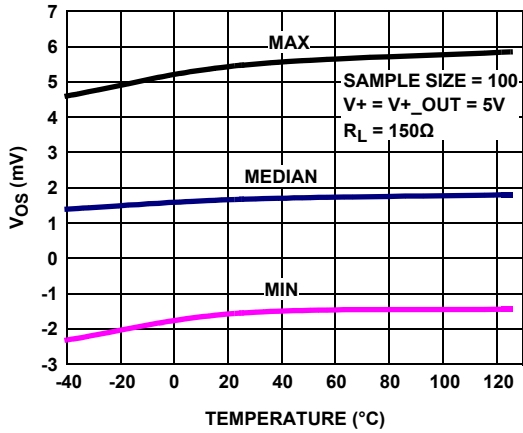


FIGURE 24. OUTPUT OFFSET VOLTAGE V_{OS} vs TEMPERATURE

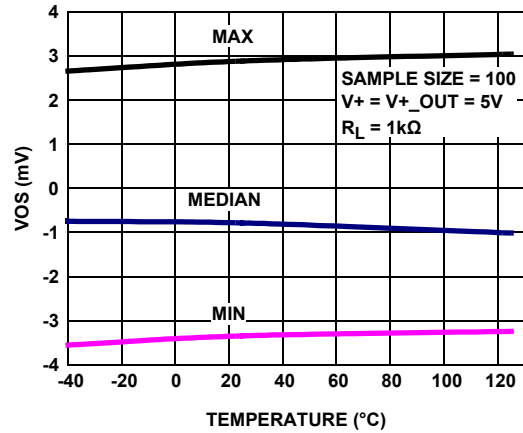


FIGURE 25. OUTPUT OFFSET VOLTAGE V_{OS} vs TEMPERATURE

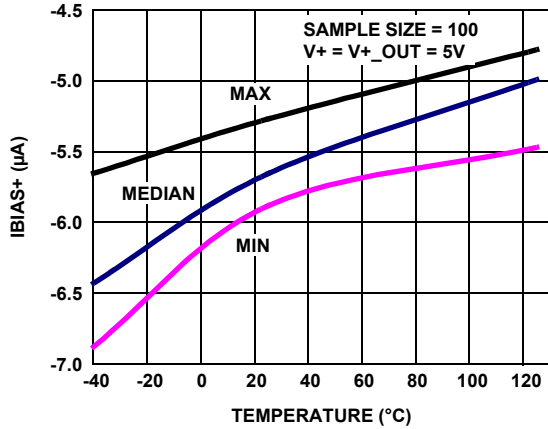


FIGURE 26. I_{BIAS} vs TEMPERATURE

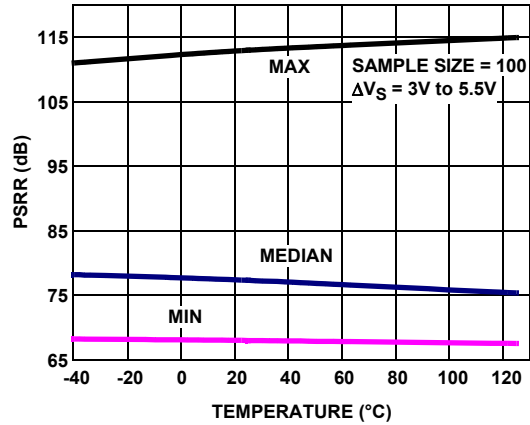


FIGURE 27. PSRR vs TEMPERATURE

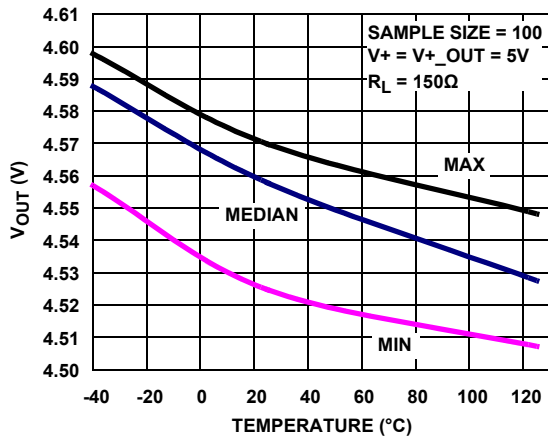


FIGURE 28. V_{OUT} HIGH vs TEMPERATURE

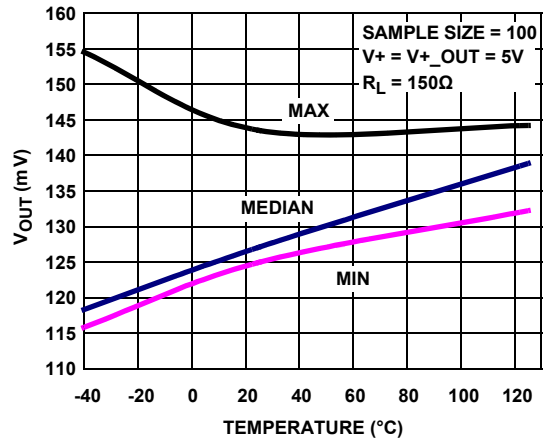


FIGURE 29. V_{OUT} LOW vs TEMPERATURE

Typical Performance Curves (Continued)

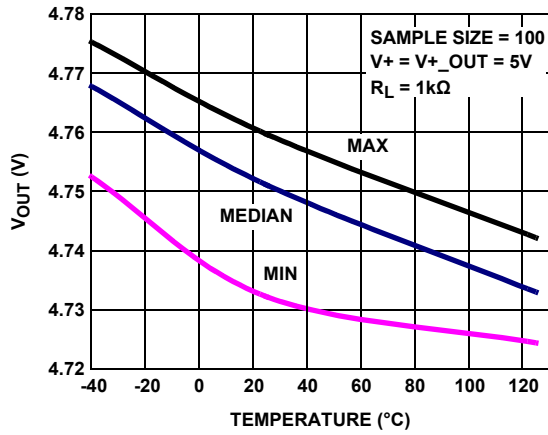


FIGURE 30. V_{OUT} HIGH vs TEMPERATURE

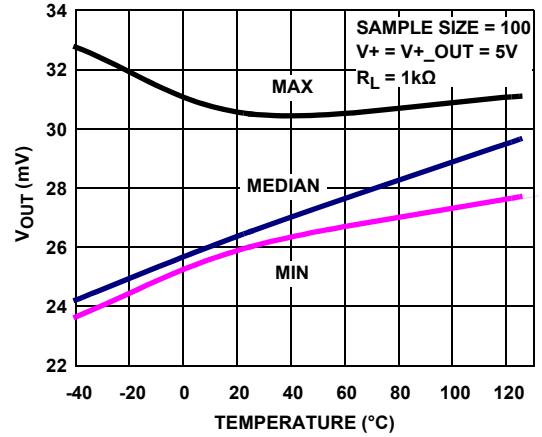


FIGURE 31. V_{OUT} LOW vs TEMPERATURE

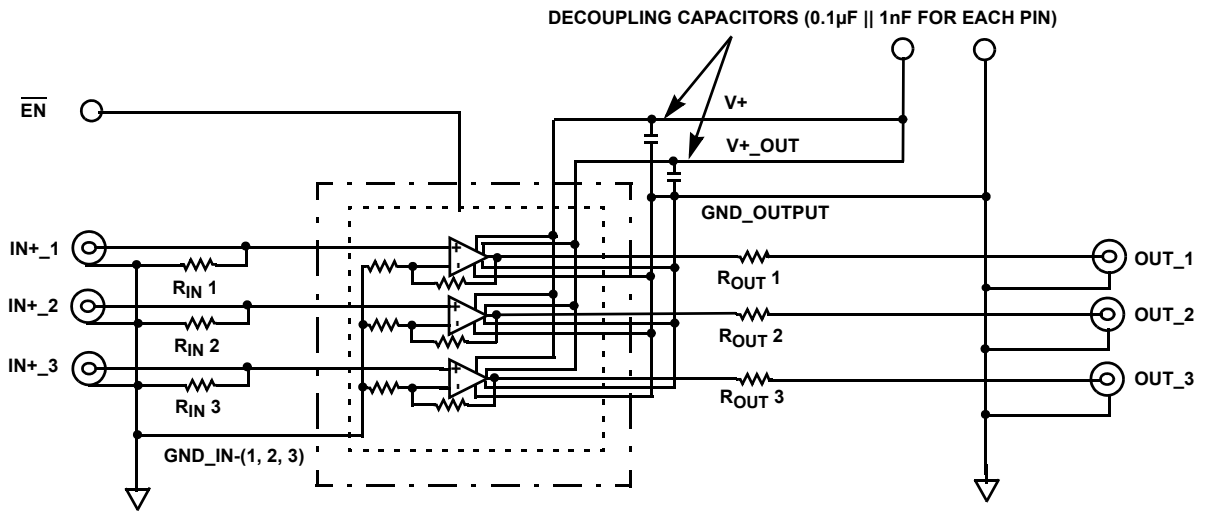


FIGURE 32. BASIC APPLICATION CIRCUIT

Application Information

General

The ISL55033 single supply, fixed gain, triple amplifier is intended for use in a variety of video and other high speed applications. The device features a ground-sensing PNP input stage and a bipolar rail-to-rail output stage. The three amplifiers have an internally fixed gain of 2 and share a single enable pin as shown in [Figure 32](#).

Ground Connections

For the best isolation performance and crosstalk rejection, all GND pins must connect directly to the GND plane. In addition, the electrically conductive thermal pad (EP) must also connect directly to ground.

Power Considerations

Separate V+ power supply and GND pins for the input and output stages are provided to maximize PSRR. Providing separate power pins provides a way to prevent high speed transient currents in the output stage from bleeding into the sensitive amplifier input and gain stages. To maximize crosstalk isolation, each power supply pin should have its own decoupling capacitors connected as close to the pin as possible as shown in [Figure 32](#) (0.1 μ F in parallel with 1nF recommended).

The ESD protection circuits use internal diodes from all pins to the V+ and ground pins. In addition, a dV/dt-triggered clamp is connected between the V+ and V- pins, as shown in Equivalent Circuit 1 on [page 2](#). The dV/dt triggered clamp imposes a maximum supply turn-on slew rate of 1V/ μ s. Damaging currents can flow for power supply slew rates in excess of 1V/ μ s, such as during hot plugging. Under these conditions, additional methods should be employed to ensure the maximum supply slew rate is not exceeded.

Single Supply Input/Output Considerations

For best performance, the input signal voltage range should be maintained between 0.1V to 2.1V. These input limits correspond to an output voltage range of 0.2V to 4.2V and define the limits of linear operation. [Figure 4](#) shows the frequency response versus the input DC voltage level. [Figures 16](#) and [17](#) show the differential gain-phase performance over the input range of 0V to 2.4V operating into a 150 Ω load. The 0.1V to 2.1V input levels corresponds to a 0.2V to 4.2V output levels, which define the minimum and maximum range of output linear operation.

Composite video with sync requires care to ensure that the negative sync tip voltage (typically -300mV) is properly level-shifted up into the ISL55033 input linear operating region of +0.1V to 2.1V. The high input impedance enables AC coupling using low values of coupling capacitance with relatively high input voltage divider resistances.

$\overline{\text{EN}}$ and Power-down States

The $\overline{\text{EN}}$ pin is active low. An internal pull-down resistor ensures the device will be active with no connection to the $\overline{\text{EN}}$ pin. The power-down state is established within approximately 25ns, if a logic high (>2V) is placed on the $\overline{\text{EN}}$ pin. In the power-down state, supply current is reduced significantly by shutting the three

amplifiers off. The output presents a relatively high impedance (~2k Ω) to the output pin. Multiplexing several outputs together is possible using the enable/disable function as long as the application can tolerate the limited power-down output impedance.

Limiting the Output Current

No output short-circuit current limit exists on these parts. All applications need to limit the output current to less than 40mA. Adequate thermal heat sinking of the parts is also required.

PC Board Layout

The AC performance of this circuit depends greatly on the care taken in designing the PC board. The following are recommendations to achieve optimum high frequency performance from your PC board.

- The use of low inductance components, such as chip resistors and chip capacitors, is strongly recommended.
- Minimize signal trace lengths. Trace inductance and capacitance can easily limit circuit performance. Avoid sharp corners. Use rounded corners when possible. Vias in the signal lines add inductance at high frequency and should be avoided. PCB traces greater than 1" begin to exhibit transmission line characteristics with signal rise/fall times of 1ns or less. High frequency performance may be degraded for traces greater than one inch, unless controlled impedance (50 Ω or 75 Ω) strip lines or microstrips are used.
- Match channel-to-channel analog I/O trace lengths and layout symmetry. This will minimize propagation delay mismatches.
- Maximize use of AC decoupled PCB layers. All signal I/O lines should be routed over continuous ground planes (i.e. no split planes or PCB gaps under these lines). Avoid vias in the signal I/O lines.
- Use proper value and location of termination resistors. Input termination resistors should be as close to the input terminal as possible and output termination resistors as close to the receiving device as possible.
- When testing, use good quality connectors and cables, matching cable types and keeping cable lengths to a minimum.
- A minimum of two, high frequency, power supply decoupling capacitors (100pF, 0.1 μ F), on each V+ pin, are recommended as close to the devices as possible. Avoid vias between the capacitor and the device because vias add unwanted inductance. Larger capacitors (e.g., electrolytics) can be farther away. When vias are required in a layout, they should be routed as far away from the device as possible.

ISL55033

The QFN Package Requires Additional PCB Layout Rules for the Thermal Pad

The thermal pad (EP) is electrically connected to power supply ground (GND_PWR) through the high resistance IC substrate. Its primary function is to provide heat sinking for the IC. However, because of the connection to the power ground pins through the substrate, the thermal pad must be tied to the power supply ground to prevent unwanted current flow through the thermal

pad. Maximum AC performance is achieved if the thermal pad has good contact to the IC ground pins. Heat sinking requirements can be satisfied using thermal vias directly beneath the thermal pad to a heat dissipating layer of a square at least 1" on a side. Fill the PCB pad under the EP with vias and connect those vias to a substantial ground plane. Reference [TB379](#), section 3) on page 2 and Appendix A, or JEDEC JESD51-5, for more information.

Revision History

The revision history provided is for informational purposes only and is believed to be accurate, but not warranted. Please go to web to make sure you have the latest revision.

| DATE | REVISION | CHANGE |
|---------------|----------|---|
| June 29, 2015 | FN6346.1 | <ul style="list-style-type: none">-Pin Descriptions table on page 2, updated equivalent circuit as follows:<ul style="list-style-type: none">Pin number 4: from Circuit 1 to Circuit 4.Pin number 5: from Circuit 4 to Circuits 1, 2, 4, 5 and added sentence to the description.Pin number 6: from Circuit 4 to Circuit 3.Pin number 10: from Circuit 4 to Circuit 3.Pin number 12: from Circuit 4 to Circuits 1, 2, 4.Added EP details to the table.Updated Circuits 3 and 4 figure.-Ordering information table on page 2: Removed ISL55033EVAL1Z.- Ordering information table on page 2: Added MSL note.-Thermal Information table on page 3, added "Theta jc" and reference "Note 5".-"Electrical Specification" table on page 3, test condition from V+ = 5V to V+_VOUT = 5V.-Electrical Specification" table on page 3, under enable section changed "Parameter" name "VIH-ENB" to "VIL-ENB" for the 0.8V typical value and changed "Parameter" name "VIL-ENB" to "VIH-ENB" for the 2V typical value.-"PC Board Layout" on page 11, changed reference from "0.01µF" cap to "0.1µF", removed paragraph referencing "NIC" pins.-updated "The QFN Package Requires Additional PCB Layout Rules for the Thermal Pad" on page 12 paragraph.- Added revision history and about Intersil verbiage. |

About Intersil

Intersil Corporation is a leading provider of innovative power management and precision analog solutions. The company's products address some of the largest markets within the industrial and infrastructure, mobile computing and high-end consumer markets.

For the most updated datasheet, application notes, related documentation and related parts, please see the respective product information page found at www.intersil.com.

You may report errors or suggestions for improving this datasheet by visiting www.intersil.com/ask.

Reliability reports are also available from our website at www.intersil.com/support

For additional products, see www.intersil.com/en/products.html

Intersil products are manufactured, assembled and tested utilizing ISO9001 quality systems as noted in the quality certifications found at www.intersil.com/en/support/qualandreliability.html

Intersil products are sold by description only. Intersil Corporation reserves the right to make changes in circuit design, software and/or specifications at any time without notice. Accordingly, the reader is cautioned to verify that data sheets are current before placing orders. Information furnished by Intersil is believed to be accurate and reliable. However, no responsibility is assumed by Intersil or its subsidiaries for its use; nor for any infringements of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Intersil or its subsidiaries.


For information regarding Intersil Corporation and its products, see www.intersil.com

Package Outline Drawing


L12.3x3A

12 LEAD THIN QUAD FLAT NO LEAD PLASTIC PACKAGE


Rev 0, 09/07

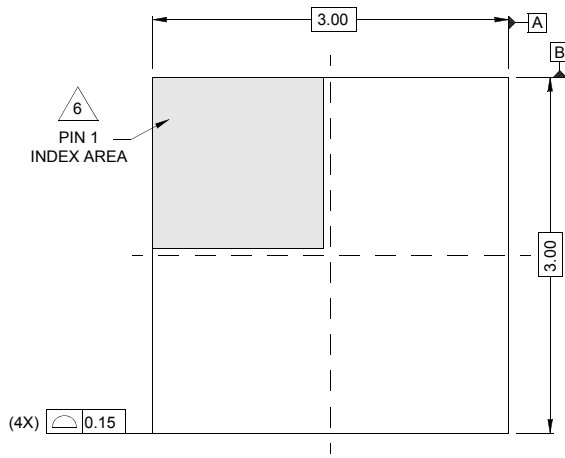


TOP VIEW

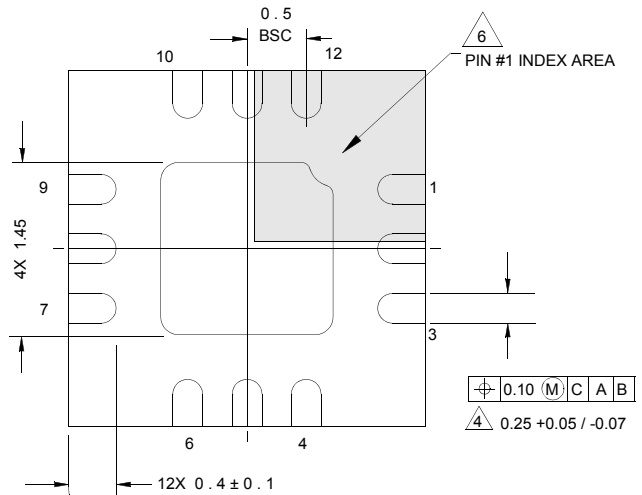


BOTTOM VIEW

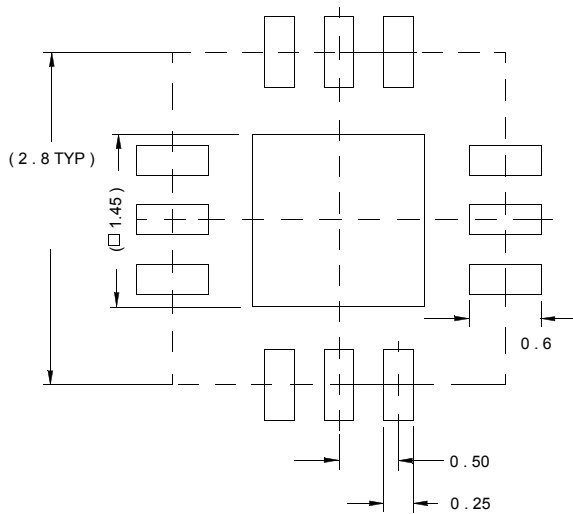

TYPICAL RECOMMENDED LAND PATTERN

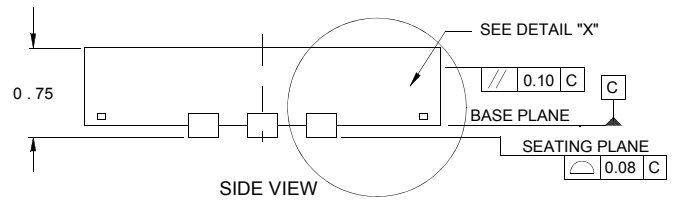

SIDE VIEW



DETAIL "X"

NOTES:

1. Dimensions are in millimeters.
Dimensions in () for Reference Only.
2. Dimensioning and tolerancing conform to AMSE Y14.5m-1994.
3. Unless otherwise specified, tolerance : Decimal ± 0.05
4. Dimension b applies to the metallized terminal and is measured between 0.18mm and 0.30mm from the terminal tip.
5. Tiebar shown (if present) is a non-functional feature.
6. The configuration of the pin #1 identifier is optional, but must be located within the zone indicated. The pin #1 identifier may be either a mold or mark feature.