



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Model


# KLS-150A-RH

RoHS  
COMPLIANT

12 Volt Input

Dual Tube CCFT Inverter

Brightness Control

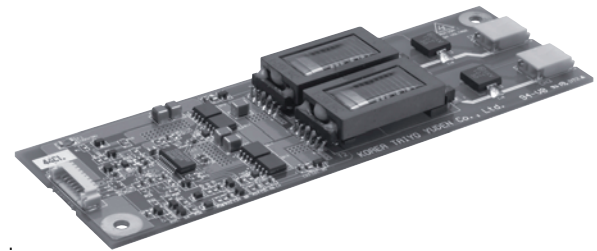

### Physical Specifications

Dimensions:	120mm x 40mm x 10.0mm (4.72" x 1.57" x 0.39")
Operating Temp:	0 to 60°C, convection cooling
Relative Humidity:	20% to 90%, non-condensing
Storage:	-20 to 85°C/5-95% RH non-condensing
Impact Resistance:	50G half wave per 2 msec
Vibration Resistance:	10-55-10 Hz/min @ 1.5mm

### Input Specifications\*

Item	Condition	Standard		
		MIN	TYP	MAX
Input Voltage Rated Tolerance	—	12 Vdc		
	Continuous Operation Starting Condition (Discharge Starting Voltage)	10.8 V - 13.2 V		
Max. Input Current	V <sub>IN</sub> = 12 Vdc Luminance @ Max.	1.2 A Typ.		
Max. Input Power	V <sub>IN</sub> = 12 Vdc Luminance @ Max.	16 W Max.		
DC-Bright	I <sub>OUT</sub> = Max	3.3 V		
	I <sub>OUT</sub> = Min	0 V		
On/Off Input Current	On V <sub>CONT</sub> = 3.0 - 5.0 V	I <sub>MAX</sub> = 0.1 mA		
	Off V <sub>CONT</sub> = GND-0.8 Vdc	I <sub>MAX</sub> = 16 μA		

\*Above Specifications Occur @ 25 ± 5°C

### Output Specifications\*

Item	Condition	Standard		
		MIN	TYP	MAX
Output Voltage (Vrms)	V <sub>IN</sub> = 12 Vdc	—	930	—
Starting Voltage (Vrms)	V <sub>IN</sub> = 10.8 Vdc	2000	—	—
Tube Current for per Lamp (mArms)	Luminance @ Max. (High)	—	6.5	—
	Luminance @ Max. (Low)	—	4.0	—
	Luminance @ Min. (High)	—	3.0	—
	Luminance @ Min. (Low)	—	2.0	—
Max. Power Output for 2 Lamps (W)	V <sub>IN</sub> = 12 Vdc/Luminance @ Max.	—	13	—
Ignition Frequency (kHz)	Luminance @ Max.	40	55	80


\*Above specifications occur @ 25 ± 5°C.

Model

# KLS-150A-RH

## Luminance Variance

Item	Condition	Applied Voltage	Output Current
Luminance @ Max. (High)		Vbr= 3.3 V, Vsel = 5.0 V	6.5 mA (one lamp)
Luminance @ Max. (Low)		Vbr= 3.3 V, Vsel = 0 V	4 mA (one lamp)
Luminance @ Min. (High)		Vbr= 0 V, Vsel = 5.0 V	3 mA (one lamp)
Luminance @ Min. (Low)		Vbr= 0 V, Vsel = 0 V	2 mA (one lamp)

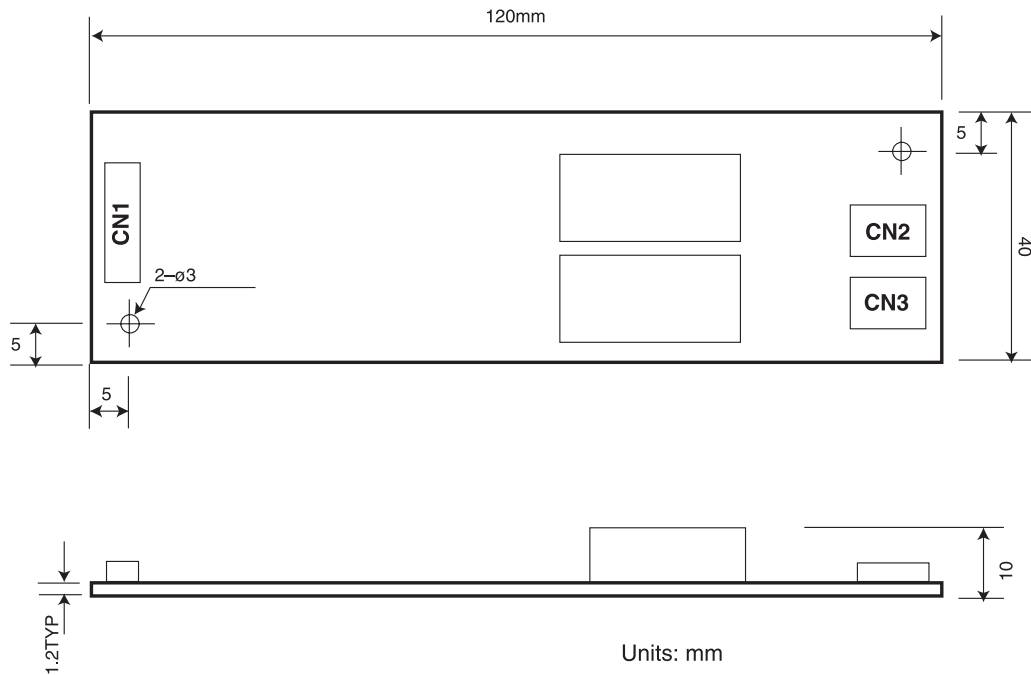

© Copyright 2007 TAIYO YUDEN (U.S.A.), INC. Specifications subject to change without notice.

## TAIYO YUDEN

TAIYO YUDEN (U.S.A.), INC.  
440 Stevens Avenue, Suite 300 Solana Beach, CA 92075  
(858) 350-6800 / Fax: (858) 350-6854  
**(800) 263-4532** [www.t-yuden.com](http://www.t-yuden.com) [inverters@t-yuden.com](mailto:inverters@t-yuden.com)




FM 32227

Model

# KLS-150A-RH

Tech Notes


## Connection Diagram

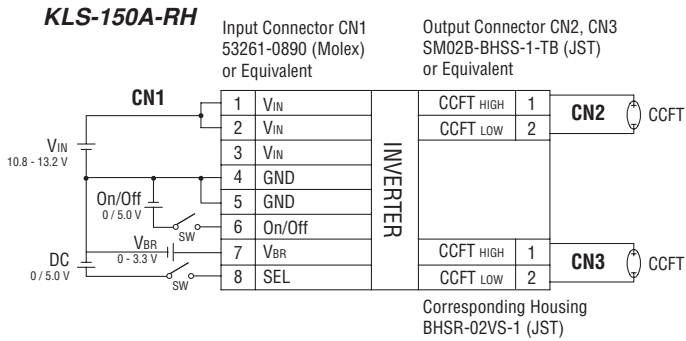


## DC Brightness Control Method\*

Maximum output current can be adjusted by applying bias voltage or using a variable resistor as shown below.


$I_{out} = 6.5\text{mA}$   
( $V_{in} = 12\text{V}$ ,  
 $On/Off = 5\text{V}$ ,  
 $V_{br} = 3.3\text{V}$ ,  
 $V_{sel} = 5\text{V}$ )

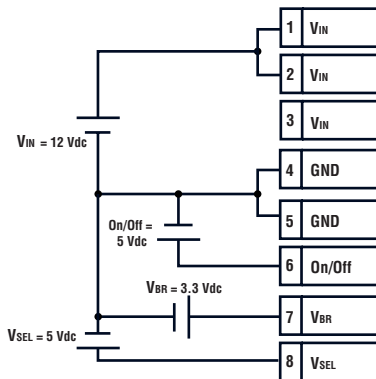


$I_{out} = 4\text{mA}$   
( $V_{in} = 12\text{V}$ ,  
 $On/Off = 5\text{V}$ ,  
 $V_{br} = 3.3\text{V}$ ,  
 $V_{sel} = 0\text{V}$ )

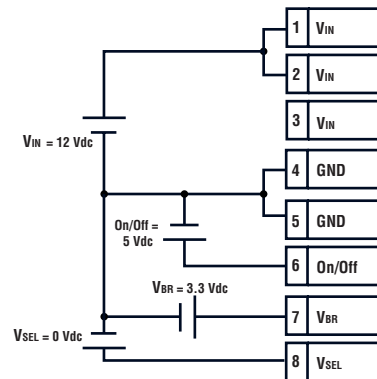

$I_{out} = 3\text{mA}$   
( $V_{in} = 12\text{V}$ ,  
 $On/Off = 5\text{V}$ ,  
 $V_{br} = 0\text{V}$ ,  
 $V_{sel} = 5\text{V}$ )

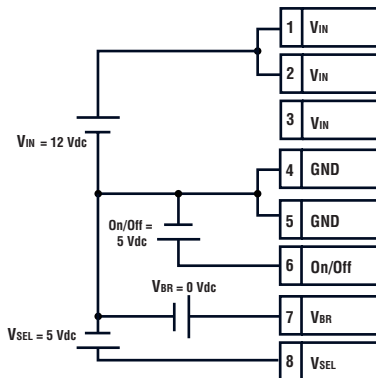

$I_{out} = 2\text{mA}$   
( $V_{in} = 12\text{V}$ ,  
 $On/Off = 5\text{V}$ ,  
 $V_{br} = 0\text{V}$ ,  
 $V_{sel} = 0\text{V}$ )

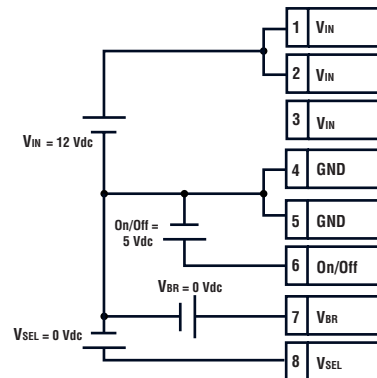

© Copyright 2007 TAIYO YUDEN (U.S.A.), INC. Specifications subject to change without notice.

**TAIYO YUDEN**

TAIYO YUDEN (U.S.A.), INC.  
440 Stevens Avenue, Suite 300 Solana Beach, CA 92075  
(858) 350-6800 / Fax: (858) 350-6854  
**(800) 263-4532**    [www.t-yuden.com](http://www.t-yuden.com)    [inverters@t-yuden.com](mailto:inverters@t-yuden.com)



FM 32227