



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us


Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



ASSY P/N	DESCRIPTION	ITEM A	ITEM A DESCRIPTION	CUT LENGTH (mm)	ITEM B	ITEM B DESCRIPTION
797580001	Micro-Fit Female (Sn) 20 AWG,UL1061,150MM	799442856	Wire 18AWG, UL1061	150 +/- 5	39000038	Mini-Fit Female (Sn)
797580002	Mini-Fit Female (Sn) 18 AWG,UL1061,150MM	799442113	Wire 20AWG, UL1061	150 +/- 5	430300001	Micro-Fit Female (Sn)
797580003	SL Female (Sn) 22 AWG,UL1061,150MM	<del>799442856</del>	Wire 22AWG, UL1061	150 +/- 5	16020086	SL Female (Sn)
797580004	Micro-Fit Female (Au) 20 AWG,UL1061,150MM	799442113	Wire 20AWG, UL1061	150 +/- 5	430300003	Micro-Fit Female (Au)
797580005	Mini-Fit Male Tin (Sn) 18 AWG,UL1061,150MM	799442625	Wire 18AWG, UL1061	150 +/- 5	39000040	Mini-Fit Male Tin (Sn)
797580006	PicoBlade 26 AWG,UL1061,150MM	799442625	Wire 26AWG, UL1061	150 +/- 5	500798000	PicoBlade
797580007	KK Hot Tin (Sn) 22 AWG,UL1061,150MM	799442332	Wire 22AWG, UL1061	150 +/- 5	08500113	KK Hot Tin (Sn)
797580008	Pico-SPOXFemale (Sn)24 AWG,UL1061,150MM	799443305	Wire 24AWG, UL1061	150 +/- 5	874210000	Pico-SPOX Female (Sn)
797580009	Mini-Fit Female (Sn) 18 AWG,UL1061,300MM	799442856	Wire 18AWG, UL1061	300 +/- 5	39000038	Mini-Fit Female (Sn)
797580010	Micro-Fit Female (Sn) 20 AWG,UL1061,300MM	799442113	Wire 20AWG, UL1061	300 +/- 5	430300001	Micro-Fit Female (Sn)
797580011	SL Female (Sn) 22 AWG,UL1061,300MM	799442332	Wire 22AWG, UL1061	300 +/- 5	16020086	SL Female (Sn)
797580012	Micro-Fit Female (Au) 20 AWG,UL1061,300MM	799442113	Wire 20AWG, UL1061	300 +/- 5	430300003	Micro-Fit Female (Au)
797580013	Mini-Fit Male Tin (Sn) 18 AWG,UL1061,300MM	799442856	Wire 18AWG, UL1061	300 +/- 5	39000040	Mini-Fit Male Tin (Sn)
797580014	PicoBlade 26 AWG,UL1061,300MM	799442625	Wire 26AWG, UL1061	300 +/- 5	500798000	PicoBlade
797580015	KK Hot Tin (Sn) 22 AWG,UL1061,300MM	799442332	Wire 22AWG, UL1061	300 +/- 5	08500113	KK Hot Tin (Sn)
797580016	Pico-SPOX Female (Sn)24 AWG,UL1061,300MM	799443305	Wire 24AWG, UL1061	300 +/- 5	874210000	Pico-SPOX Female (Sn)

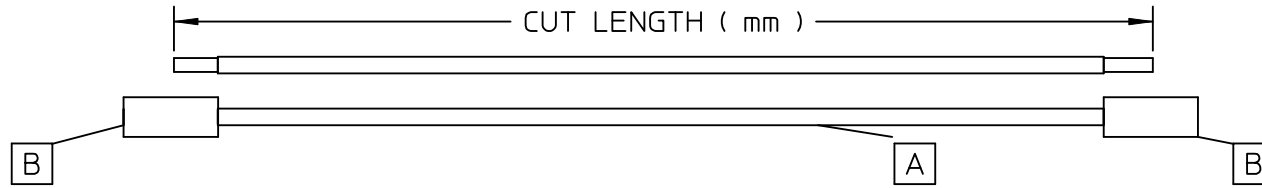

NOTES :

- 1 THE PRODUCT SPECIFICATION OF HARNESS RELIES ON THE CONNECTOR, TERMINALS AND WIRE SPEC.
- 2 ROHS AND LEAD FREE COMPLIANT
- 3 SPECIAL REQUIEREMENT: N/A

ROHS COMPLIANT

ENTER DESCRIPTION EC NO: MEX2010-0030 DRWN: SMARTINEZ 2010/01/12 CHKD: ACUEVAS 2010/01/12 APPR: ACUEVAS 2010/01/13	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE ---	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		
			mm	INCH	DRAWN BY SMARTINEZ	DATE 2010/01/12	TITLE PRE-CRIMPED LEADS AMERICAS DISTRIBUTION CHANNEL REV : A			
		4 PLACES	± ---	± ---	CHECKED BY ACUEVAS	DATE 2010/01/12				
		3 PLACES	± ---	± ---	APPROVED BY ACUEVAS	DATE 2010/01/12	MOLEX INCORPORATED			
		2 PLACES	± ---	± ---	MATERIAL NO. 79758XXXX	DOCUMENT NO. SD-797580001				
1 PLACE	± ---	± ---	ANGULAR ±1/2°		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS										