



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



# Photoelectrics Laser, Diffuse-reflective (Colour Mark Sensor) Type LD32CND15

CARLO GAVAZZI

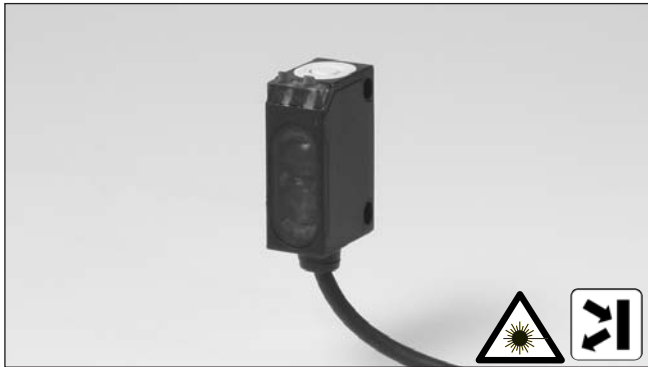

- Miniature sensor range
- Range: 150 mm
- Sensitivity adjustment by Teach-In programming
- Modulated, red laser light 650 nm (class 2)
- Supply voltage: 10 to 30 VDC
- Output: 100 mA, NPN or PNP preset
- Make and break switching function programmable
- LED for output indication, signal stability and power ON
- Protection: reverse polarity, short circuit and transients
- Excellent EMC performance
- Accurate detection of small printing marks



## Product Description

The LD32CND15 sensor family comes in a compact 12 x 32 x 20 mm reinforced PMMA/ABS-housing. The sensors are useful in applications where high-accuracy detection as well as small size is required. The Teach-In function for

adjustment of the sensitivity makes the sensors highly flexible. The output type is preset (NPN or PNP), and the output switching function is programmable (NO or NC). The small laser spot makes the diffuse-reflective sensor useful as colour mark sensor.

## Ordering Key

**LD32CND15PPM5T**

Type	_____
Housing style	_____
Housing size	_____
Housing material	_____
Housing length	_____
Detection principle	_____
Sensing distance	_____
Output type	_____
Output configuration	_____
Connection type	_____
Teach-In	_____

## Type Selection

Housing W x H x D	Range S <sub>n</sub>	Ordering no. NPN & PNP cable Make & break switching	Ordering no. NPN & PNP plug Make & break switching
12 x 32 x 20 mm	150 mm	LD 32 CND 15 NPT LD 32 CND 15 PPT	LD 32 CND 15 NPM5T LD 32 CND 15 PPM5T

## Specifications


<b>Rated operating distance (S<sub>n</sub>)</b>	Up to 150 mm, reference target Kodak test card R 27, white, 90% reflectivity, 100 x 100 mm Optimal working distance as colour mark sensor is 70-100 mm.	<b>Minimum operational current (I<sub>m</sub>)</b>	0.5 mA
<b>Blind zone</b>	None	<b>OFF-state current (I<sub>r</sub>)</b>	≤ 100 μA
<b>Sensitivity</b>	Adjustable by Teach-In (push button or wire)	<b>Voltage drop (U<sub>d</sub>)</b>	≤ 2.4 VDC @ 100 mA
<b>Temperature drift</b>	≤ 1%/°C	<b>Protection</b>	Short-circuit, reverse polarity and transients
<b>Hysteresis (H) (differential travel)</b>	≤ 10%	<b>Laser protection class</b>	Class 2 - according to EN60825-1-3/97
<b>Rated operational volt. (U<sub>B</sub>)</b>	10 to 30 VDC (ripple included)	<b>Average power</b>	< 1 mW
<b>Ripple (U<sub>rpp</sub>)</b>	≤ 10%	<b>Pulse width</b>	t = 3 μs
<b>Output current</b>		<b>Pulse repetition time</b>	f = 5 kHz
Continuous (I <sub>a</sub> )	≤ 100 mA	<b>MTBF</b>	> 50'000 h @ T <sub>a</sub> = 40°C
Short-time (I)	≤ 100 mA (max. load capacity 100 nF)	<b>Light source</b>	Laser, red light, 650 nm
<b>No load supply current (I<sub>o</sub>)</b>	≤ 25 mA @ 24 VDC	<b>Light type</b>	red, modulated
		<b>Sensing angle</b>	< 0.8°
		<b>Ambient light</b>	5,000 lux
		<b>Light spot</b>	< 0.7 mm @ focus
		<b>Operating frequency</b>	1000 Hz
		<b>Response time</b>	
		OFF-ON (t <sub>ON</sub> )	≤ 0.5 ms
		ON-OFF (t <sub>OFF</sub> )	≤ 0.5 ms
		<b>Power ON delay (t<sub>v</sub>)</b>	≤ 300 ms

## Specifications (cont.)


<b>Output function</b> NPN and PNP NO/NC switching function	Preset Set up by button	<b>Vibration</b>	10 to 55 Hz, 0.5 mm/7.5 g (IEC 60068-2-6)
<b>External Teach (ET)</b> Same function as button Locked (disable teach button) Operating mode	10 to 30 VDC 0 to 2.5 VDC Not connected	<b>Shock</b>	30 g/11 ms, 3 pos, 3 neg per axis (IEC 60068-2-6, 60068-2-32)
<b>Indication</b> Output ON Signal stability ON and power ON	LED, yellow LED, green	<b>Rated insulation voltage</b>	500 VAC (rms)
<b>Environment</b> Installation category  Pollution degree  Degree of protection	II (IEC 60664/60664A; 60947-1) 3 (IEC 60664/60664A; 60947-1) IP 67 (IEC 60529; 60947-1)	<b>Housing material</b> Body Front material	ABS, black PMMA, red
<b>Ambient temperature</b> Operating Storage	-20 to +60 <sup>∞</sup> C (-4 to +140 <sup>∞</sup> F) -20 to +80 <sup>∞</sup> C (-4 to +176 <sup>∞</sup> F)	<b>Connection</b> Cable  Plug	PUR, black, 2 m 4 x 0.14 mm <sup>2</sup> , Ø = 3.6 mm M8, 4-pin
		<b>Weight</b>	Cable type: 40 g Plug type: 10 g
		<b>CE-marking</b>	Yes

## Operation Diagram

tv = Power ON delay

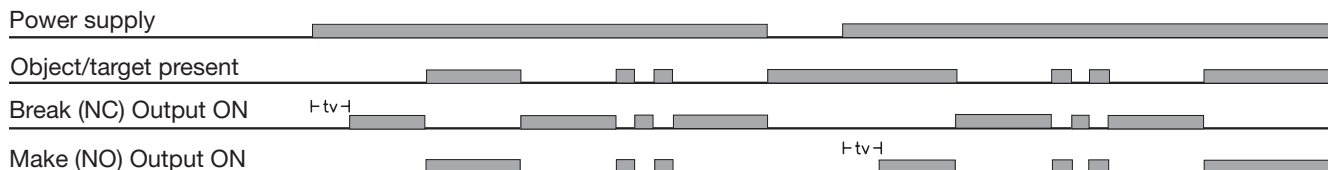


## Wiring Diagrams

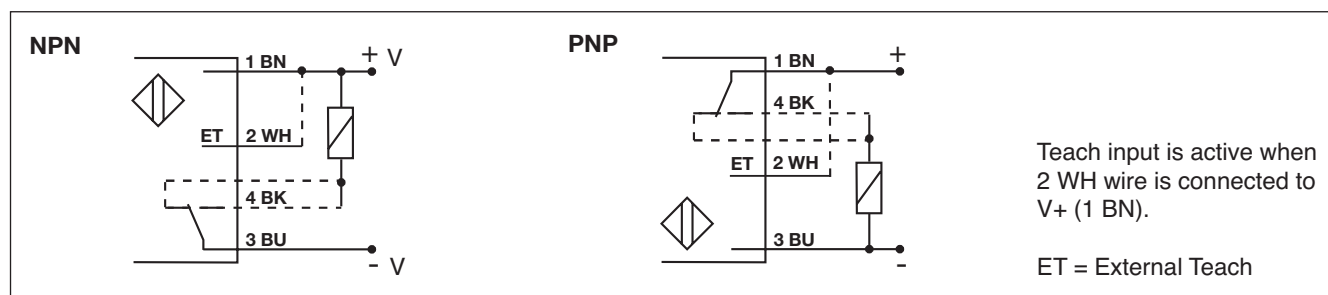


## Installation Hints

<p><i>To avoid interference from inductive voltage/current peaks, separate the prox. switch power cables from any other power cables, e.g. motor, contactor or solenoid cables</i></p>	<p><i>Relief of cable strain</i></p> <p>The cable should not be pulled</p>	<p><i>Protection of the sensing face</i></p> <p>A proximity switch should not serve as mechanical stop</p>	<p><i>Switch mounted on mobile carrier</i></p> <p>Any repetitive flexing of the cable should be avoided</p>
--	--	--	---


## Dimensions

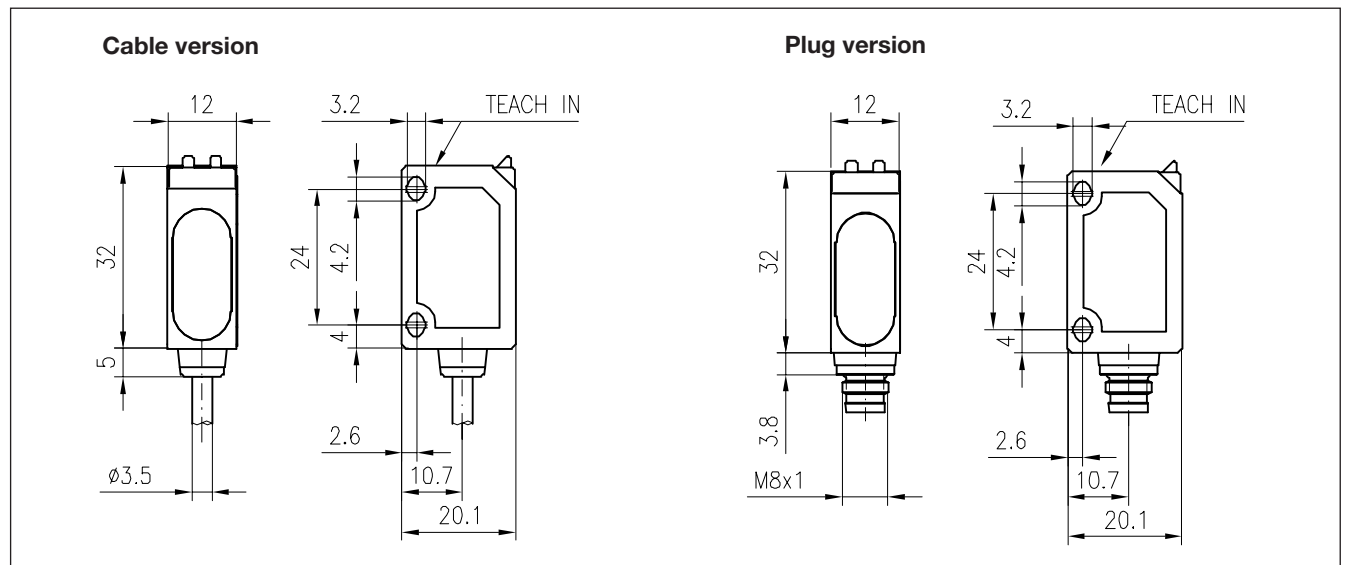

## Signal Stability Indication

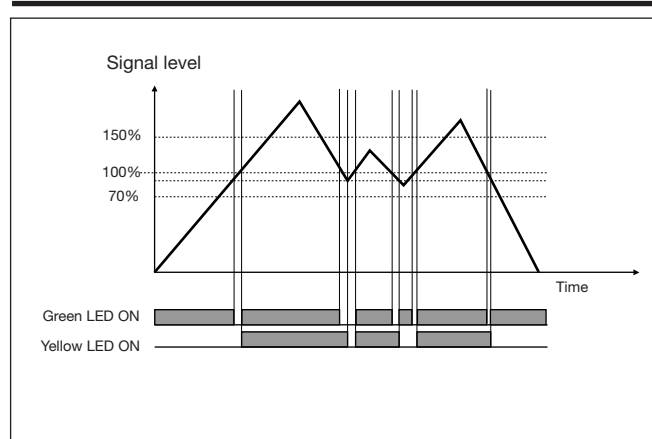

## Accessories

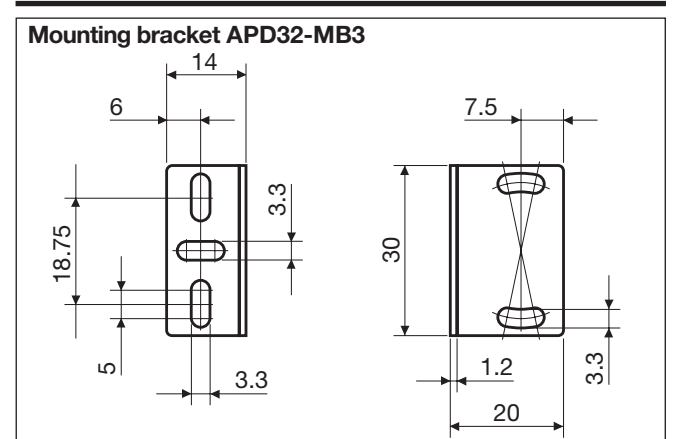

For further information refer to "Accessories"


## Delivery Contents

- Photoelectric switch: LD 32 CND 15
- Installation instruction
- **Packaging:** Cardboard box

## Adjustment

### Sensitivity adjustment, with static object

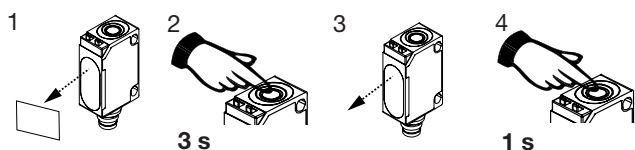

1. Line up the sensor with the object. Yellow LED and green LED are ON.
2. Press the button for 3 s until both LED's flash simultaneously (the first switching point is stored).
3. Place the object outside the detection area.
4. Press the button for 1 s.
  - a) The green LED flashes and stays ON: the second switching point is stored, and the sensor is ready to operate.
  - b) Both LED's flash simultaneously: the sensor cannot detect the object, no switching points are stored.




### Sensitivity adjustment, with only one object

1. Line up the sensor with the object. Yellow LED and green LED are ON.
2. Press the button for 3 s until both LED's flash simultaneously (the first switching point is stored).
3. Leave the object in the detection area, press the button for 1 s. The green LED flashes and stays on: the second switching point is stored, and the sensor is ready to operate.



### Sensitivity adjustment, with a running process

1. Line up the sensor with the object. Green LED is ON. At this stage the status of the yellow LED can be ignored.
2. The running process must be the only "object" within the detection area. Press the button for 3 s until both LED's flash simultaneously.
   
 **3 s**
3. Press the button for at least the duration of one process cycle.
   
 **1 cycle**
  - a) The green LED flashes and stays ON: both switching points have been stored, and the sensor is ready to operate.
  - b) Both LED's flash simultaneously: the sensor cannot detect the object, no switching points are stored.

### Programming of make and break switching function

1. Press the button for 13 s.  **13 s**  
Both LED's flash alternately.
2. Release the button: the green LED flashes.
3. While the green LED flashes, the output is inverted each time the button is pressed. This is indicated by the yellow LED.  
When the button is not pressed for 10 s, the current output function is stored.  
The sensor is now ready for operation.

### Default setting

1. No object in the detection area: Press the button for 3 s, until both LED's flash simultaneously.  **3 s**
2. No object in the detection area:  
Press the button for 1 s.  **1 s**  
The sensor is set to maximum sensitivity.

**NB!** The Teach Input (2 WH) will work similarly to the push button, active High.