

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China

LinkSwitch-4 Family

Energy-Efficient, Accurate Primary-Side Regulated CV/CC Switcher for Adapters and Chargers

Product Highlights

Dramatically Simplifies CV/CC Converters

- Eliminates optocoupler and all secondary CV/CC control circuitry
- Eliminates all control loop compensation circuitry

Advanced Performance Features

- Dynamic base drive technology provides flexibility in choice of BJT transistor by dynamically optimizing BJT switching characteristics
 - Extends RBSOA of BJT
 - Dramatically reduces sensitivity to BJT gain
- Compensates for input line voltage variations
- Compensates for cable voltage drop
- Compensates for external component temperature variations
- Very accurate IC parameter tolerances using proprietary trimming technology
- Frequency up to 65 kHz to reduce transformer size
- The minimum peak current is fixed to improve transient load response

Enhanced Performance Features

- Easy start for starting into capacitive loads (LNK4114D, LNK4115D)
- Constant power for high current start-up (LNK4214D, LNK4215D)
- 13003 drive improved efficiency with 13003 BJT's (LNK4302S, LNK4322S)

Advanced Protection/Safety Features

- Single fault output overvoltage and short-circuit
- Over-temperature protection
- Active clamp

EcoSmart™ – Energy Efficient

- Meets DoE 6 and CoC V5 2016 via an optimized quasi-resonant switching PWM/PFM control
- No-load consumption of <30 mW at 230 VAC input

Green Package

- Halogen free and RoHS compliant package

Applications

- Chargers for cell/cordless phones, PDAs, MP3/portable audio devices, adapters, networking, etc.

Description

The LinkSwitch™-4 family of ICs dramatically simplifies low power CV/CC charger design by eliminating an optocoupler and secondary control circuitry. The LinkSwitch-4 family adaptive BJT drive technology uses combined base and emitter switching to boost switching performance and deliver higher efficiency, wider Reverse Bias Safe Operating Area (RBSOA) margin and the flexibility to accommodate a wide range of low cost BJT. The device incorporates a multimode PWM/PFM controller with quasi resonant switch to maximize the efficiency, meets low no-load power and at same time maintain fast transient response greater than 4.3 V with a load change from 0% to 100%.



Figure 3. SOT-23-6 and SO-8 Packages.

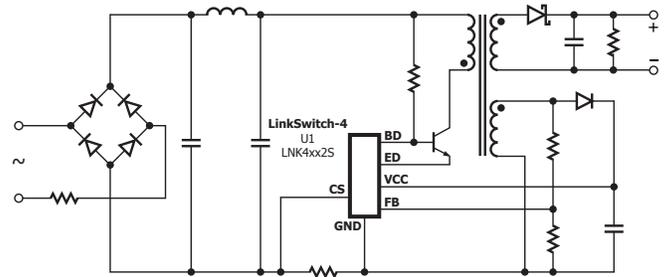


Figure 1. Typical Application (SOT-23-6) (S).

PI-7462-122315

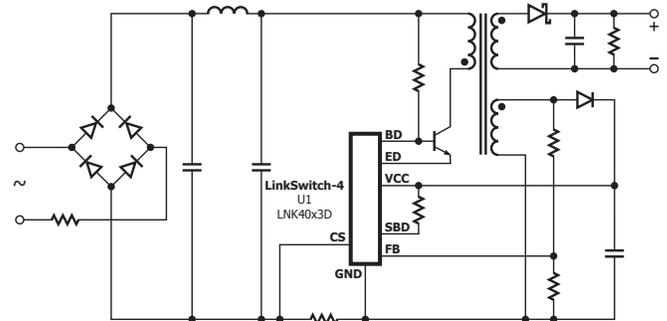


Figure 2. Typical Application (SO-8) (D).

PI-7464-010815


Output Power Table

| Product ^{3,4} | 85 - 265 VAC | |
|------------------------|-----------------------------|--|
| | Features ⁵ | Adapter ¹ Open Frame ² |
| LNK43x2S | 13003 Drive | 5 W |
| LNK40x2S | STD | 6.5 W |
| LNK40x3S | STD | 8 W |
| LNK4323S | STD | 8 W |
| LNK40x3D | STD | 10 W |
| LNK4323D | STD | 10 W |
| LNK40x4D | STD | 15 W |
| LNK4114D | Easy Start | 15 W |
| LNK4214D | Easy Start + Constant Power | 15 W |
| LNK4115D | Easy Start | 18 W |
| LNK4215D | Easy Start + Constant Power | 18 W |

Table 1. Output Power Table.

Notes:

1. Minimum continuous power in a typical enclosed adapter measured at +50 °C ambient, 85-265 VAC device $T_j \leq 100$ °C.
2. Maximum practical continuous power in an open frame design with adequate heat sinking, measured at +50 °C.
3. Package: D: SO-8, S: SOT-23-6.
4. Cable compensation factor. x = 0 (no cable compensation), x = 1 (3% cable compensation) x = 2 (6% cable compensation).
5. Easy Start feature uses the BJT current to directly charge C_{VCC} , allowing start-up into large output capacitors. 13003 drive feature has the gate drive optimized for maximum efficiency when using 13003 BJTs. Constant power feature provides 175% of rated current at start-up, allowing start-up into large output capacitors (see Figure 15). STD are standard products with all the advanced performance and protection/safety features.

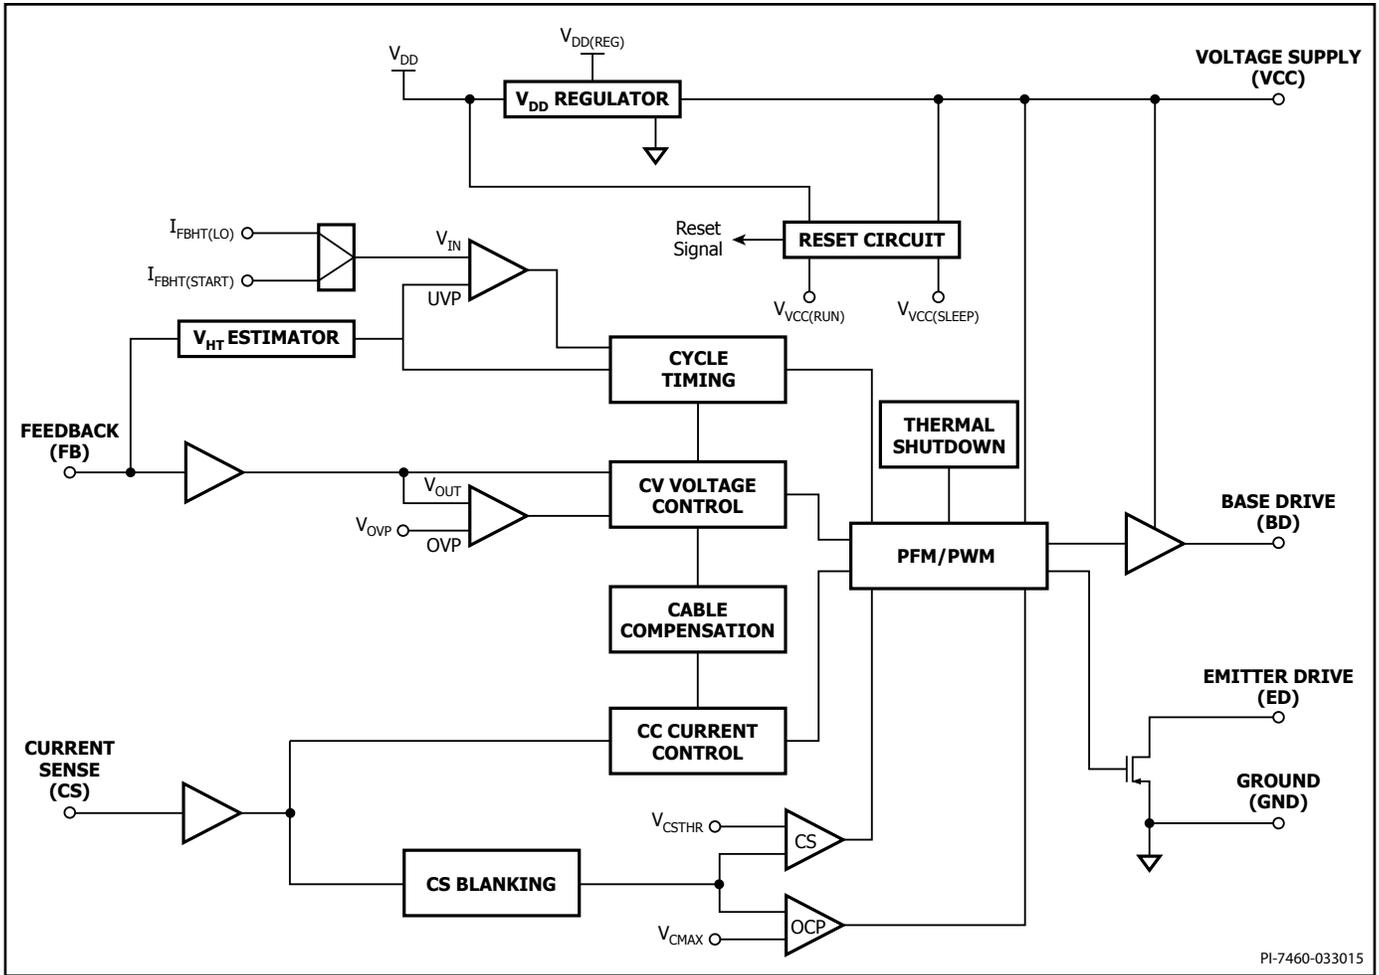

PI-7460-033015

Figure 4. LNK40x2S, LNK40x3S, LNK4323S and LNK43x2S Functional Block Diagram.

Functional Description

Power-Up/Power-Down Sequences

Refer to Figure 10 and Figure 7. When mains input voltage (V_{IN}) is applied, current flows through the start-up resistors (R_{HT}) and BJT. Some of this current flows into the LinkSwitch-4 internal circuits, which are in Sleep mode; the remainder charges capacitor C_{VCC} . As soon as the VOLTAGE SUPPLY pin voltage rises to $V_{VCC(RUN)}$, the LinkSwitch-4 changes to Initialize mode. Current consumption increases to $I_{VCC(RUN)}$ while internal circuits are enabled. The emitter switch is held at low impedance to ground (GND) and a short drive pulse is output on the BASE DRIVE pin, during which time the voltage at feedback is held at GND potential by current sourced from the FEEDBACK pin. This enables the LinkSwitch-4 control circuit to compare the rectified mains input voltage with thresholds for allowing or preventing the next stage of power-up. If the input voltage is too low ($I_{FB} < I_{FBHT(START)}$), the LinkSwitch-4 will not issue further drive pulses, the VCC voltage will discharge to $V_{VCC(SLEEP)}$ and the power-up sequence will repeat. If the mains input voltage is high enough ($I_{FB} > I_{FBHT(START)}$), the LinkSwitch-4 will enter Run mode and drive pulses will be output on the BASE DRIVE pin. To achieve smooth power-up (monotonic rise in V_{OUT}), C_{VCC} must be large enough to power the control circuitry during Initialize mode and the first few cycles of Run mode, until sufficient power is provided by the transformer voltage supply winding.

If the input voltage falls below $V_{MAINS(LO)}$ (see Input Undervoltage Protection), V_{VCC} will fall below $V_{VCC(SLEEP)}$ and the LinkSwitch-4 will go

into Sleep mode, reducing its current consumption to $I_{VCC(SLEEP)}$. The control circuitry will re-initialize if the input voltage is restored and V_{VCC} reaches $V_{VCC(RUN)}$.

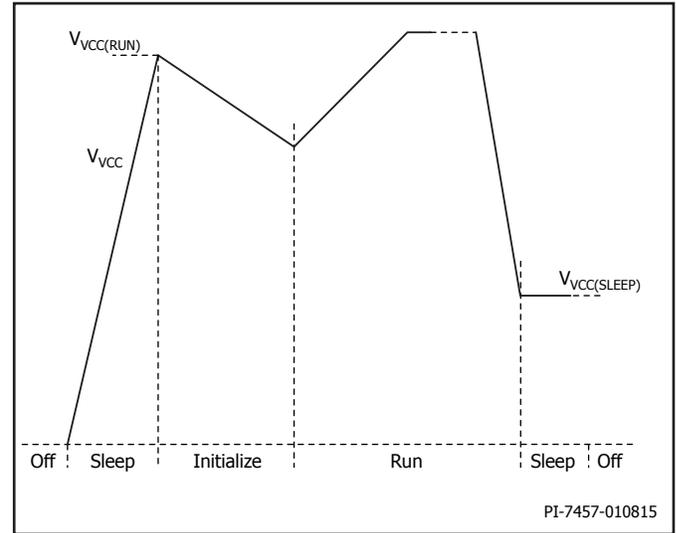


Figure 7. VCC Waveforms.

| Mode | Description |
|------------|--|
| Sleep | From initial application of input power or from Run mode, if V_{VCC} falls below $V_{VCC(SLEEP)}$ the LinkSwitch-4 goes to Sleep mode. Non-essential circuits are turned off. Base and Emitter drives are turned off so BASE DRIVE and EMITTER DRIVE pins become high impedance, allowing the bootstrap resistor (R_{HT}) and BJT to start the circuit. Sleep mode is exited when V_{VCC} rises to $V_{VCC(RUN)}$ and the control circuitry goes to Initialize mode. |
| Initialize | Internal circuits are enabled and the LinkSwitch-4 issues one switching cycle to sample the input voltage via the FEEDBACK pin. If V_{IN} (hence V_{HT}) is high enough, the LinkSwitch-4 changes to Run mode. If V_{IN} is not high enough, no further base drive pulses are issued and the LinkSwitch-4 returns to Sleep mode when V_{VCC} falls below $V_{VCC(SLEEP)}$. |
| Run | Power conversion: The control circuitry is powered from the VCC rail and the internal V_{DD} is regulated. If V_{VCC} falls below $V_{VCC(SLEEP)}$ the IC ceases power conversion and goes to Sleep mode. |

Table 2. Summary of LinkSwitch-4 Operating Modes.

Switching Waveforms

Typical waveforms at the feedback and primary current sense inputs are shown in Figure 8.

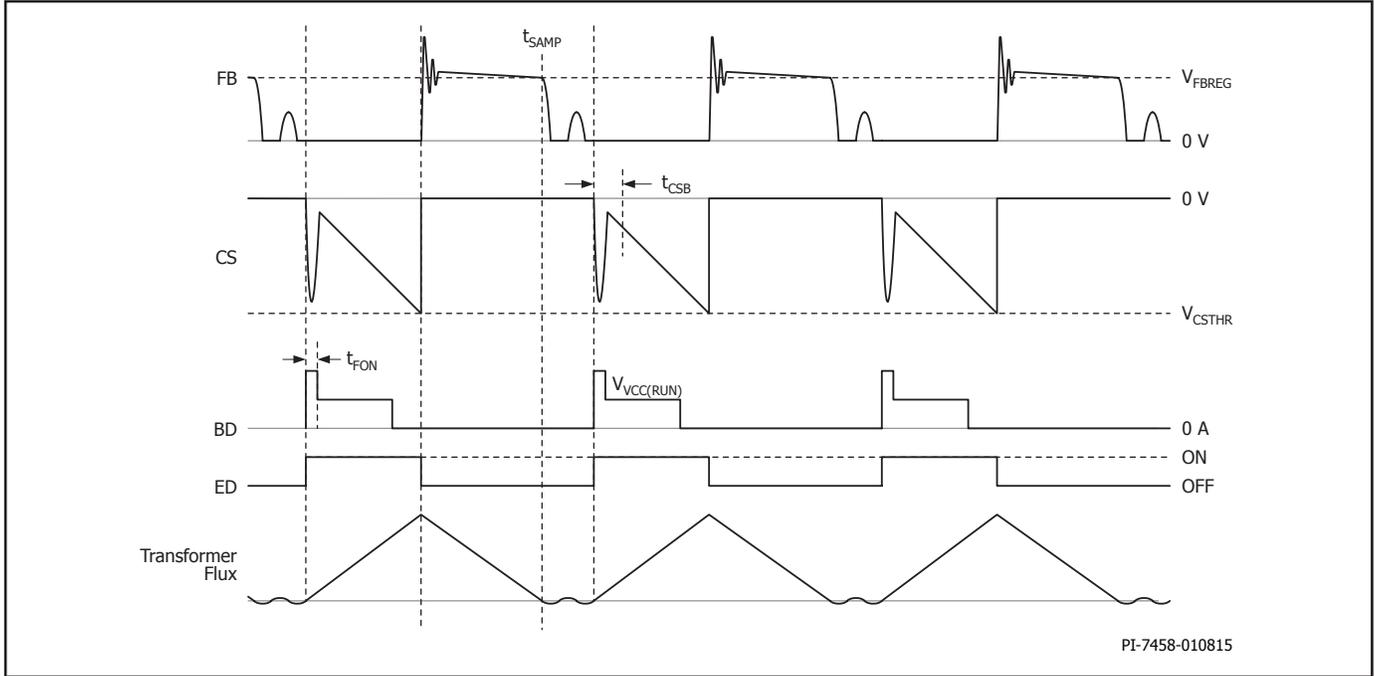


Figure 8. Typical Waveforms at the Feedback and Primary Current Sense Inputs.

Constant Voltage (CV) Regulation

Constant output voltage regulation is achieved by sensing the voltage at the feedback input, which is connected to the voltage supply winding as shown in Figure 10 or to a dedicated feedback winding. An internal current source prevents the feedback voltage from going negative. A typical feedback voltage waveform is shown in Figure 8. The feedback waveform is continuously analyzed and sampled at time t_{SAMP} to measure the reflected output voltage. t_{SAMP} is identified by the slope of the feedback waveform and is coincident with zero flux in the transformer. The sampled voltage is regulated at $V_{FB(REG)}$ by the voltage control loop. The (typical) CV mode output voltage is set by the ratio of resistors R_{FB1} and R_{FB2} (see Figure 10) and by the transformer turns ratio, according to the following formula (where output diode voltage is neglected):

$$V_{OUT(CV)} = V_{FB(REG)} \left(1 + \frac{R_{FB1}}{R_{FB2}} \right) \left(\frac{N_S}{N_F} \right)$$

Where N_F is the number of turns on the feedback (or voltage supply if used for feedback) winding and N_S is the number of turns on the secondary winding. The tolerances of R_{FB1} and R_{FB2} affect output voltage regulation and mains estimation so should typically be chosen to be 1% or better.

The current required to clamp the feedback voltage to ground potential during the on-time of the primary switch depends on the primary winding voltage (approximately equal to the rectified mains input voltage), the primary to feedback turns ratio, and resistor R_{FB1} . The controller measures feedback source current and so enables R_{FB1} to set the input voltage start threshold and the input undervoltage protection threshold, as described below.

Input Voltage Start Threshold

In Initialise mode, the LinkSwitch-4 issues a single short-duration drive pulse in order to measure the primary voltage and so the

approximate mains input voltage. If the input voltage is below $V_{MAINS(START)}$ then the LinkSwitch-4 will not start. Instead it will pause while V_{VCC} discharges below $V_{VCC(SLEEP)}$ then it will begin a new power-up cycle. If the input voltage exceeds $V_{MAINS(START)}$ the converter will power-up. $V_{MAINS(START)}$ is set by R_{FB1} using this equation:

$$V_{MAINS(START)} = \frac{-1}{\sqrt{2}} \times I_{FBHT(START)} \times R_{FB1} \times \frac{N_P}{N_F}$$

Input Undervoltage Protection

In Run mode, if the mains voltage falls to $V_{MAINS(LO)}$ the LinkSwitch-4 will stop issuing drive pulses, V_{VCC} will reduce to $V_{VCC(SLEEP)}$ and the LinkSwitch-4 will enter Sleep mode. $V_{MAINS(LO)}$ is set by R_{FB1} using this equation:

$$V_{MAINS(LO)} = \frac{-1}{\sqrt{2}} \times I_{FBHT(LO)} \times R_{FB1} \times \frac{N_P}{N_F}$$

Constant Current (CC Mode) Regulation

Constant current output ($I_{OUT(CC)}$) is achieved by regulating the CS input to the primary side estimate of the output current scaled by R_{CS} , $V_{CS(CC)}$. The regulated output current, $I_{OUT(CC)}$ is set by the value of the current sense resistor, R_{CS} , and the transformer primary to secondary turns ratio (N_P/N_S). The value of R_{CS} is determined using the formula:

$$R_{CS} \approx \left(\frac{N_P}{N_S} \right) \left(\frac{V_{CS(CC)}(Typ)}{I_{OUT(CC)}(Typ)} \right)$$

The tolerance of R_{CS} affects the accuracy of output the current regulation so is typically chosen to be 1%. The LinkSwitch-4 can maintain CC regulation down to much lower levels of $V_{SHUTDOWN(MAX)}$ normally specified for mobile phones chargers (see Figure 11).

Cable Compensation

If required, LinkSwitch-4 adjusts the converter output voltage (V_{OUT}) to compensate for voltage drop across the output cable. The amount of compensation applied (G_{CAB}) is specified by using the formula below to match cable compensation with output cable resistance (R_{CAB}):

$$G_{CAB} = \frac{I_{OUT(CC)}(Typ) \times R_{CAB}}{V_{OUT(CV)}(Typ)} \times 100\%$$

Or

$$G_{CAB} = \frac{I_{OUT(CP)}(Typ) \times R_{CAB}}{V_{OUT(CV)}(Typ)} \times 100\%$$

Drive Pulse and Frequency Modulation

The LinkSwitch-4 control circuitry determines both the primary switch peak current and the switching frequency to control output power, ensuring discontinuous conduction mode operation at all times.

Primary current generates a voltage across the current sense resistor, R_{CS} , and is sensed by the primary current sense input. The voltage on the primary CURRENT SENSE pin is negative-going, as shown in Figure 8. When the voltage exceeds a (negative) threshold (V_{CSTHR}) set by the control circuitry, base drive is driven low to turn the primary switch off. The primary current sense voltage threshold (V_{CSTHR}) varies from $V_{CS(MIN)}$ to $V_{CS(MAX)}$ during normal operation. The switching frequency varies from f_{MIN} at no-load, to the maximum switching frequency, f_{MAX} .

Minimum switching frequency occurs during no-load operation and is typically in the range 1 to 3 kHz, depending on application design. The periodic voltage waveform on the VCC input, which depends on the current consumed by the control circuitry and the value of C_{VCC} , contributes to control of the switching frequency. In no-load condition, C_{VCC} must be large enough to ensure that ripple voltage on VCC (ΔV_{VCCPFM}) is less than 1.6 V, and C_{VCC} must be small enough to ensure the ripple on VCC is greater than 50 mV:

$$C_{VCC} = \frac{I_{VCCNL}}{f_{MIN} \times \Delta V_{VCCPFM}}$$

The switching frequency increases as the load increases, eventually reaching f_{MAX} at full load. For protection purposes in the event of certain transitory conditions, the controller immediately issues a drive pulse if VCC voltage falls to $V_{VCC(LOW)}$. This is not part of normal operation or normal frequency control.

Base Drive Control

During the on-time of the BJT, the emitter is switched to GND via the EMITTER DRIVE pin. Base current, I_{BD} is controlled to achieve fast turn-on, low on-voltage and fast turn-off to enable reduced power dissipation and accurate timing of each part of the switching cycle.

As shown in Figure 9, the base drive current starts with a fixed pulse of $I_{F(ON)}/t_{F(ON)}$. Its amplitude and duration are then modulated to provide sufficient charge for low BJT on-voltage, while allowing de-saturation towards the end of on-time so as to enable fast turn-off. When V_{CSTHR} is detected on the primary CURRENT SENSE pin, the BASE DRIVE pin is switched to GND and the emitter drive switch is opened.

LNK43x2S – drive optimized for high efficiency performance using 13003 transistors.

Duty Cycle Control

Maximum duty cycle is a function of the primary to secondary turns ratio of the transformer (typically 16:1 for a 5 V output). For a universal mains input power supply, maximum duty cycle is typically

chosen to be 50% at the minimum (including ripple) of the rectified mains voltage (typically 80 V).

Quasi-Resonant Switching

The primary switch is turned on when the voltage across it rings down to a minimum (voltage-valley, quasi-resonant switching). The effect of this is to reduce losses in the switch at turn-on. It also helps reduce EMI.

Primary Switch Over-Current Protection

The primary switch is turned off if the emitter current sensed by the primary current sense input exceeds the effective threshold $V_{CS(OCPEFF)}$ subject to the minimum on-time, $T_{ON(MIN)}$. The effective threshold $V_{CS(OCPEFF)}$ depends on a threshold $V_{CS(OC)}$ predefined by the controller, the primary current sense signal rate of rise (dVcs/dt), which is dependent on the application design, and the primary CURRENT SENSE pin turn-off response time, $t_{CS(OFF)}$. This gives pulse by pulse over-current protection of the primary switch.

Output Overvoltage Protection

The on-time of the primary switch is reduced if the output voltage tends to $V_{OUT(OVP)}$. The value depends on the set output voltage ($V_{OUT(CV)}$) and the feedback OVP ratio:

$$V_{OUT(OVP)} = V_{OUT(CV)} \times G_{FB(OVP)}$$

Supplementary Base Drive (LNK40x3D, LNK4114D, LNK4214D)

The resistor R_{SBD} connects the SUPPLEMENTARY BASE DRIVE pin to VOLTAGE SUPPLY pin. It supplements current to the base drive to optimize the switching bipolar transistor turn-on and turn-off in high power applications.

Suggested values for the supplementary base drive resistor R_{SBD} are between 220 Ω and 390 Ω .

Shunt Function (LNK40x3D, LNK40x4D, LNK4115D, LNK4215D)

The shunt function is intended to automatically limit the VCC voltage and allow greater flexibility in transformer design. VOLTAGE SUPPLY pin will be shunted via R_{SBD} , the SUPPLEMENTARY BASE DRIVE pin resistance $R_{SBD(ON)}$ and $R_{SBD(OFF)}$ to the GROUND pin when the VCC voltage is greater than $V_{VCC(HI)}$ and the transformer is discharging.

Output Undervoltage Protection (LNK40x3S/D, LNK43x3S/D)

The output undervoltage protection (UVP) function is used to shutdown the converter when the output voltage is below $V_{OUT(UVP)}$.

At start-up this function is disabled during the first $N_{STARTUP}$ switching cycles and the output current is regulated allowing the output voltage to rise from 0 V in a monotonic way.

| Product | Output Undervoltage Protection Function |
|--|--|
| LNK40x2S LNK43x2S | $V_{OUT(UVP)}$ Depends on $V_{VCC(SLEEP)}$ |
| LNK40x3S LNK40x3D LNK4323S LNK4323D | $V_{OUT(UVP)} = 0.63 \times V_{OUT(CV)}$ |
| LNK40x4D | $V_{OUT(UVP)}$ Depends on $V_{VCC(SLEEP)}$ |
| LNK4114D LNK4214D LNK4115D LNK4215D | $V_{OUT(UVP)}$ Depends on $V_{VCC(SLEEP)}$ |

Table 3. Output Undervoltage Protection.

If the output does not reach $V_{OUT(UVP)}$ during this time then the controller will shutdown and restart.

$V_{OUT(UVP)}$ value depends on the set output voltage ($V_{OUT(CV)}$) and the feedback UVP ratio:

$$V_{OUT(UVP)} = V_{OUT(CV)} \times G_{FB(UVP)}$$

Easy Start (LNK4114D, LNK4214D, LNK4115D, LNK4215D)

The Easy Start feature guarantees start-up into large output capacitances and allows the output voltage to work down the CC chimney close to OV.

The Easy Start feature uses the BJT emitter current (equal to the primary current) to charge the supply capacitor C_{VCC} via an additional Schottky diode.

This only occurs when the supply voltage has fallen below V_{VCCES} and is achieved by altering the sequencing of EMITTER DRIVE pin switching.

If the supply voltage is below $V_{VCC(ES)}$ and when the base has received enough charge, the EMITTER DRIVE pin is released at the same time as the BASE DRIVE pin.

This allows the BJT emitter voltage to rise until the Schottky diode conducts. Emitter current then charges the C_{VCC} until the BJT is turned off by the BASE DRIVE pin being pulled low.

If the supply voltage is above $V_{VCC(ES)}$ then Easy Start has no effect on the operation of the controller.

Note $V_{VCC(ES)} = 6\text{ V}$ for LNK4114D and LNK4214D, $V_{VCC(ES)} = 10\text{ V}$ for LNK43x3S, LNK43x3D, LNK4115D and LNK4215D during $N_{STARTUP}$ cycles, after which it reduces to 6 V.

Over-Temperature Protection

Temperature protection is internal to LinkSwitch-4. The sensor measures the junction temperature T_J , which is the hottest part of LinkSwitch-4.

At temperatures $T_J \sim 140\text{ }^\circ\text{C}$, LinkSwitch-4 will shutdown and remain in this state until a temperature of $T_J \sim 70\text{ }^\circ\text{C}$ is reached. Whereby LinkSwitch-4 will power-up in the normal sequence.

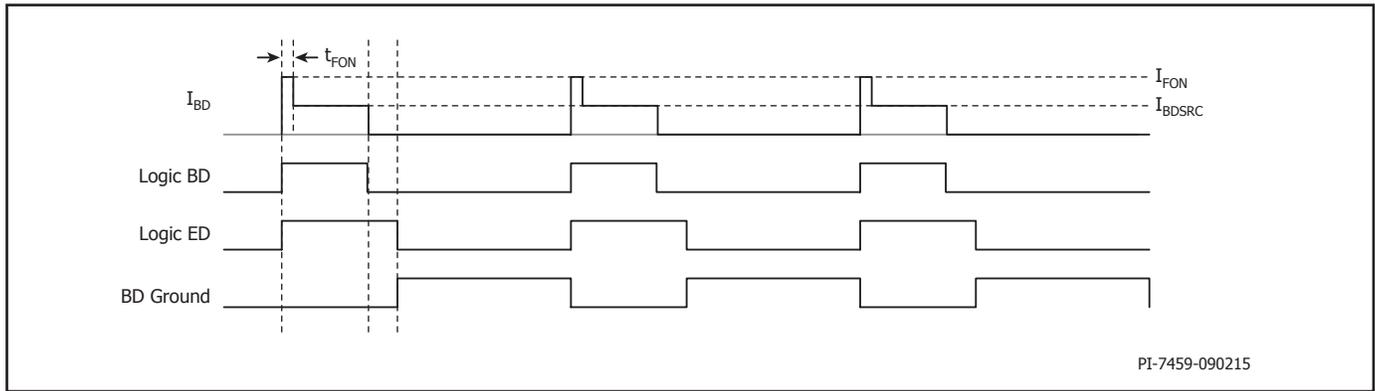


Figure 9. Base Drive Waveforms.

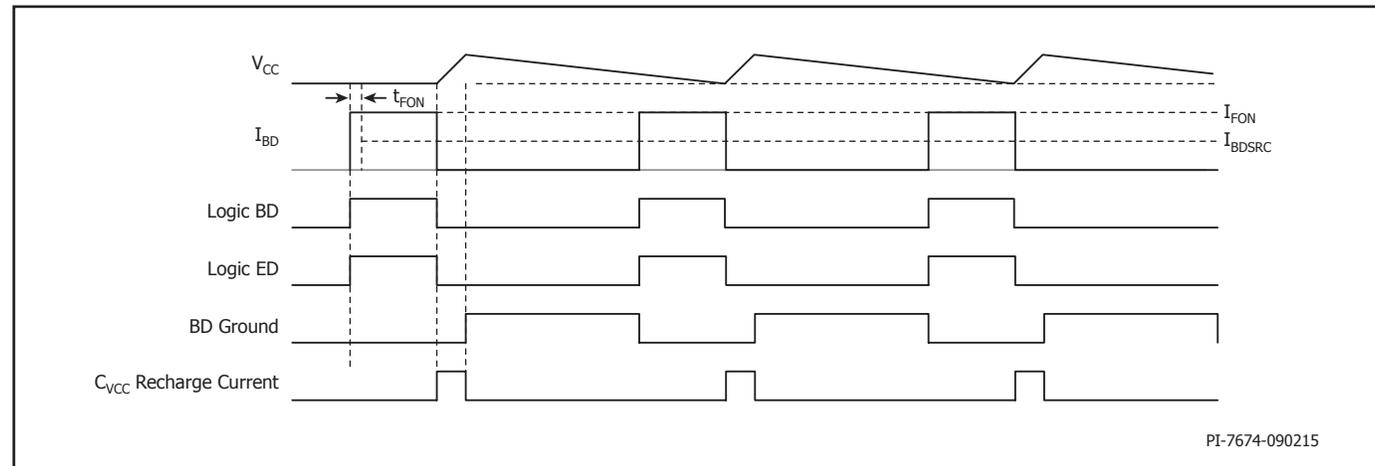


Figure 9b. Base Drive Waveforms – Easy Start mode of Operation.

Typical Application for LNK40x3D

| Parameter | Symbol | Range or Value | Units | Comment |
|----------------------------------|----------------|----------------|-------|---|
| Supply Voltage | V_{IN} | 85 - 265 | VAC | Universal mains |
| Output Voltage | $V_{OUT(CV)}$ | $5.0 \pm 5\%$ | V | Constant voltage (CV) mode, at the load |
| Output Current | I_{OUT} | 2 | A | Label rated output current |
| Switching Frequency at Full Load | f_{MAX} | 65 | kHz | |
| Cable Compensation | G_{CAB} | 6 | % | Determined by the chosen variant |
| No-load Power | P_{NL} | <30 | mW | Energy Star test method |
| Average Efficiency | η | >75 | % | Energy Star test method |
| Turn-on Delay | T_{ON} | <1 | s | |
| Undershoot Voltage | $V_{UNDERSHT}$ | >4 | V | Load step from 0 A to 0.5 A |

Table 4. 10 W Typical Application Results for Figure 10.

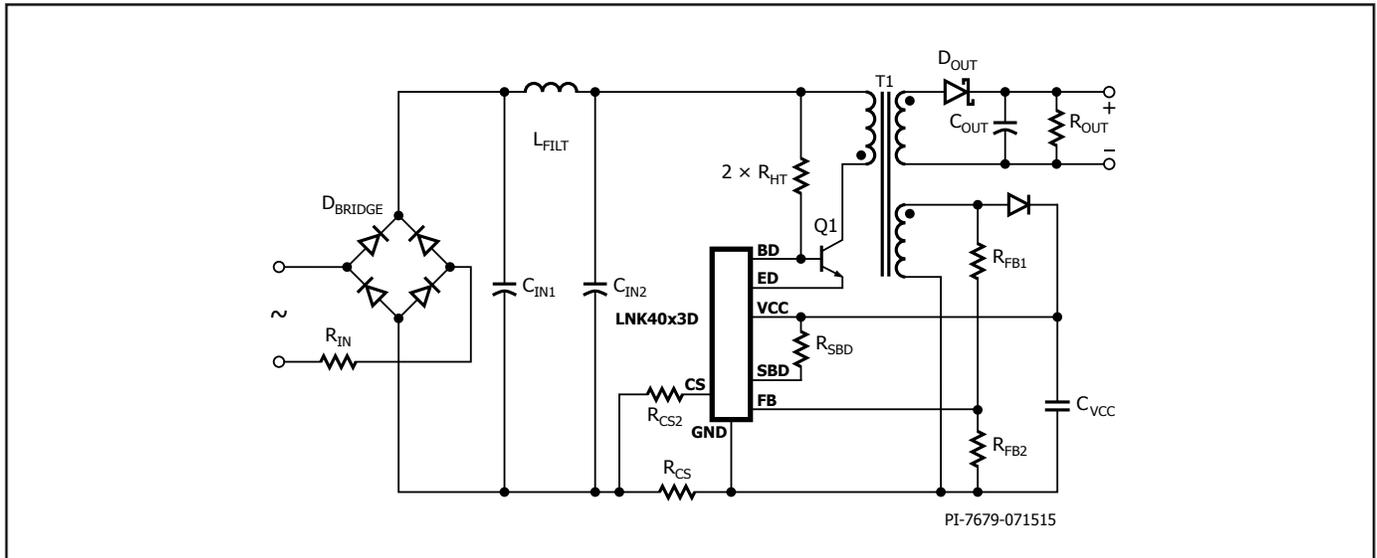


Figure 10. Typical Universal Input, 10 W Charger.

By sensing the primary-side waveforms of transformer voltage and primary current, the LinkSwitch-4 achieves constant voltage and constant current output within tight limits without the need for any secondary-side sensing components. Figure 11 shows the output characteristics of a typical charger implementation.

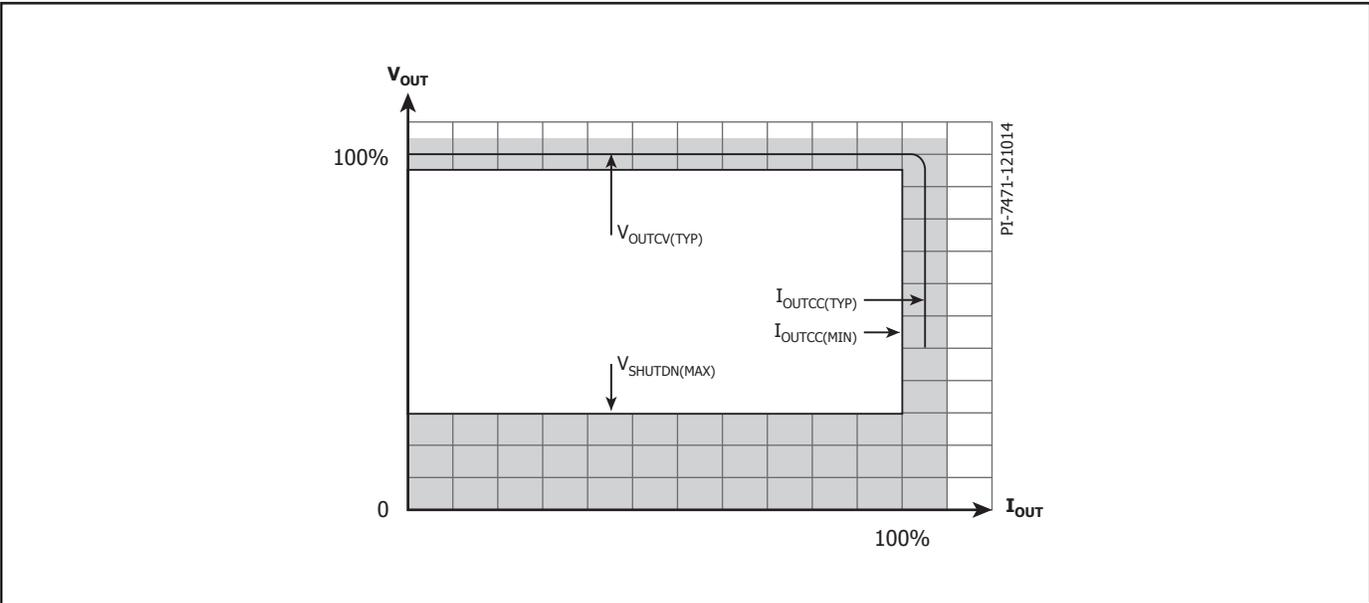


Figure 11. Typical CV/CC Output Characteristic Achieved.

Typical Networking Application for LNK4114D

| Parameter | Symbol | Range or Value | Units | Comment |
|----------------------------------|---------------|----------------|---------------|---|
| Supply Voltage | V_{IN} | 90 - 264 | VAC | Universal mains |
| Output Voltage | $V_{OUT(CV)}$ | $12.0 \pm 5\%$ | V | Constant voltage (CV) mode, at the load |
| Output Current | I_{OUT} | 1 | A | Label rated output current |
| Load Capacitance | C_{LOAD} | 3000 | μF | System capacitance |
| Switching Frequency at Full Load | f_{MAX} | 65 | kHz | |
| Cable Compensation | G_{CAB} | 3 | % | Determined by the chosen variant |
| No-load Power | P_{NL} | <75 | mW | Energy Star test method |
| Average Efficiency | η | >83 | % | Energy Star test method |
| Turn-on Delay | T_{ON} | <1 | s | |

Table 5. 12 W Typical Networking Application Results.

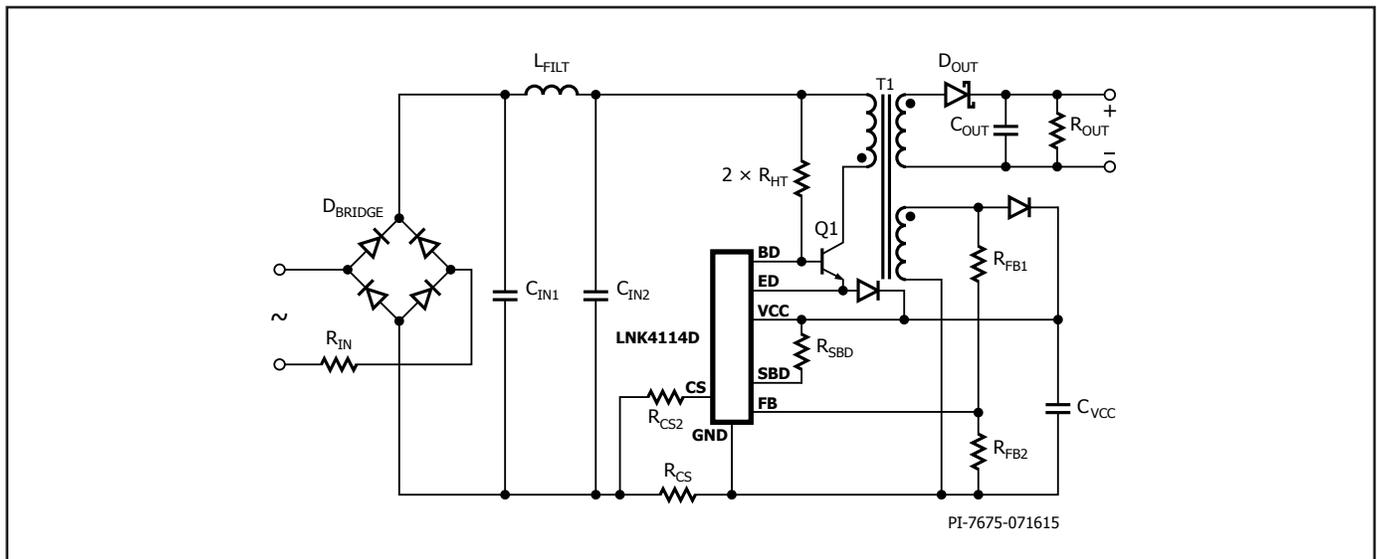


Figure 12. Typical Universal Input, 12 W Adapter.

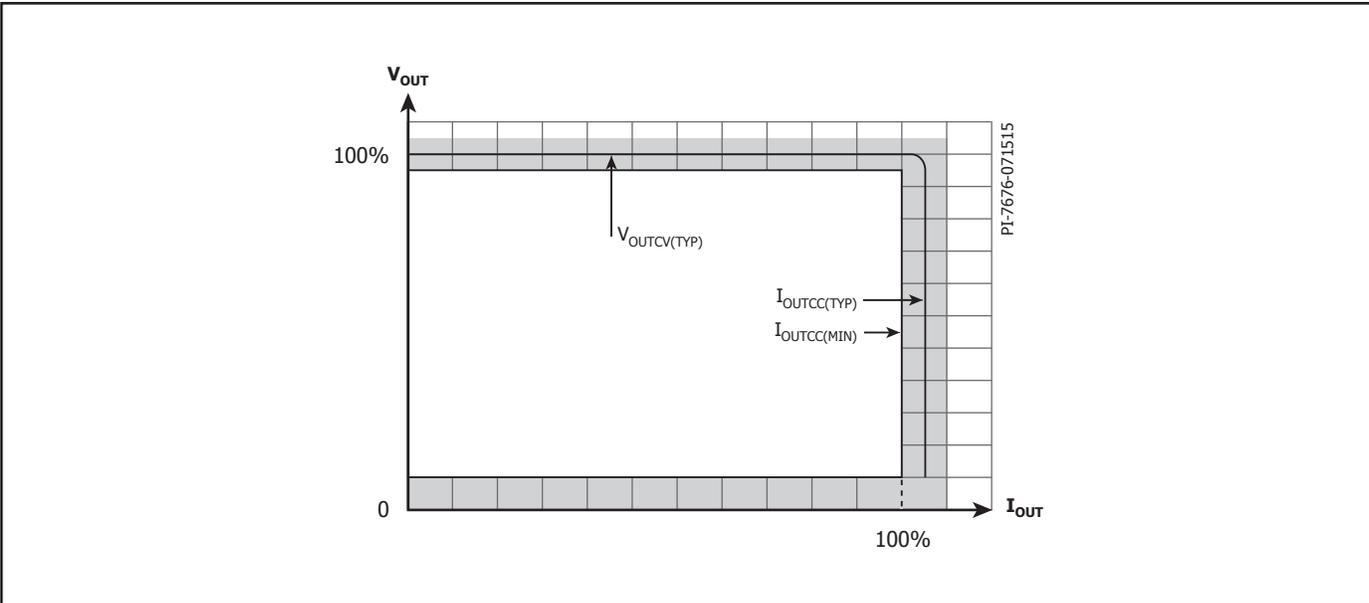


Figure 13. Typical LNK4114D and LNK4115D CV/CC Output Characteristic Achieved.

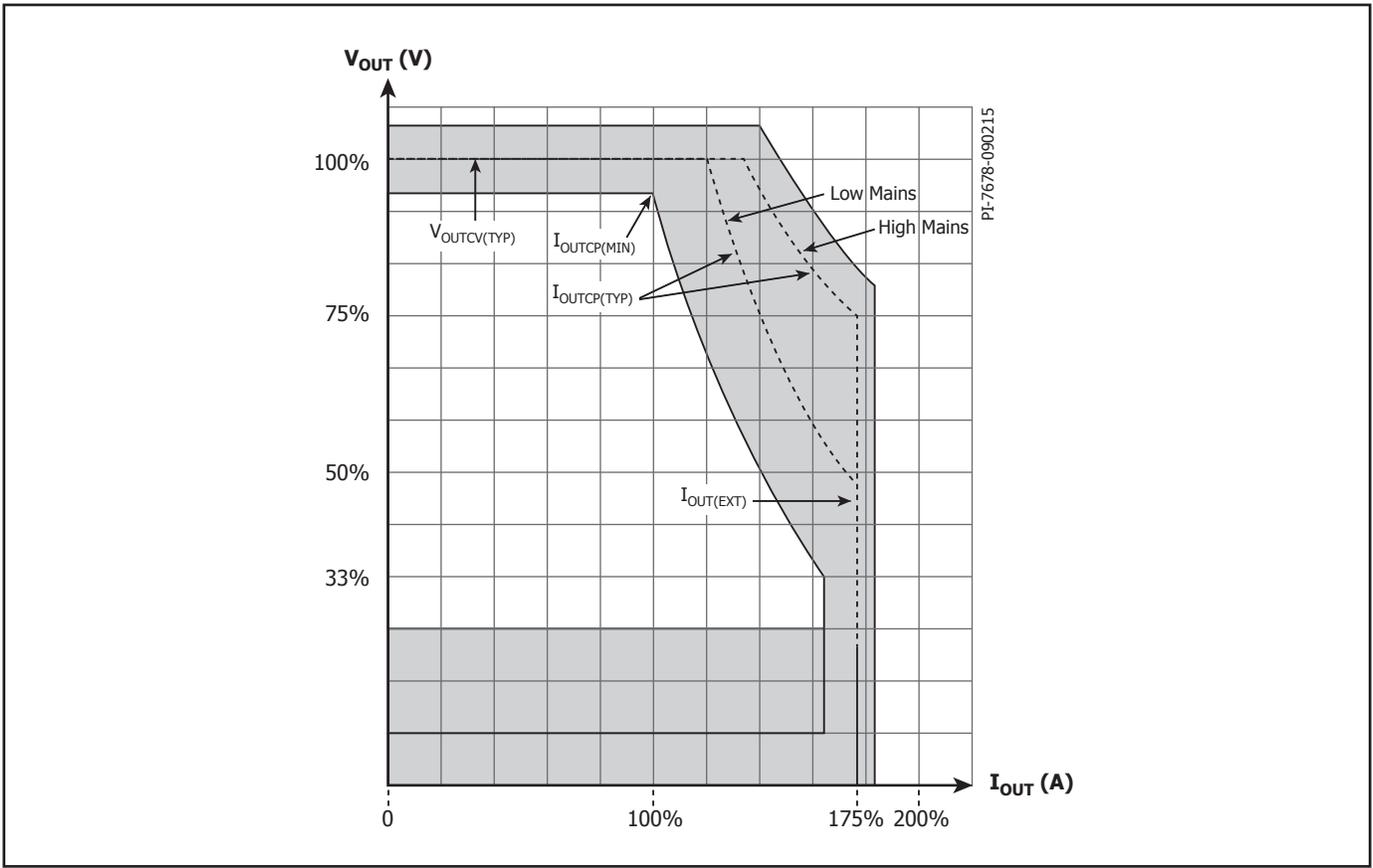


Figure 15. Typical LNK4214D and LNK4215D CP Output Characteristic Achieved.

Constant Power

The LNK4214D controller is optimized for fast start-up into loads with large capacitance. The constant current (CC) pull-up set point of the VI characteristic is determined by the value of R_{CS} . The controller regulates in CC mode until it is above approximately 50% of the programmed constant voltage (CV) regulation point (set by the values of R_{FB1} and R_{FB2}). It then regulates in a power limited or “constant power” (CP) mode until the output voltage reaches the CV set point, at which point it changes to CV mode regulation. The exact trajectory is dependent on the input mains voltage.

I_{OUT} at the point of transition between CP and CV modes, I_{OUTCP} , will be greater than 57% of $I_{OUT(EXT)}$ as shown in Figure 15.

Absolute Maximum Ratings¹

| | | | |
|---|-----------------|--|---------------|
| SUPPLY VOLTAGE Pin | -0.5 V to 18 V | Junction Temperature | -40 to 150 °C |
| FEEDBACK Pin Input Voltage | -0.5 V to 4 V | Lead Temperature ² | 260 °C |
| FEEDBACK Pin Input Current | -20 mA to 20 mA | Notes: | |
| CURRENT SENSE Pin Input Voltage..... | -0.5 V to 4 V | 1. Maximum ratings specified may be applied, one at a time | |
| CURRENT SENSE Pin Input Current..... | -20 mA to 20 mA | without causing permanent damage to the product. Exposure to | |
| BASE DRIVE Pin Voltage..... | -0.5 V to 18 V | Absolute Maximum ratings for extended periods of time may | |
| EMITTER DRIVE Pin Voltage..... | -0.5 V to 18 V | affect product reliability. | |
| SUPPLEMENTARY BASE DRIVE Pin Voltage..... | -0.5 V to 18 V | 2. Soldering, 10 seconds. | |

Thermal Resistance

Thermal Resistance: D Package: (SO-8)

(θ_{JA}) 120 °C/W

(θ_{JB})^{1,2} 30 °C/W

S Package (SOT-23-6)

(θ_{JA}) 170 °C/W

(θ_{JB})² 60 °C/W

Notes:

1. IC mounted on typical (1oz) copper clad PCB with 164 mm² ground plane surrounding GROUND pin(s).
2. θ_{JB} measured to GROUND pin terminal of device at the surface of the PCB.

| Parameter | Symbol | Conditions $T_J = -25$ to 125 °C (Unless Otherwise Specified) | Min | Typ | Max | Units |
|--|------------------|---|------|------|------|-------|
| Normal Operating Conditions | | | | | | |
| External Supply Voltage | V_{VCC} | | 5 | | 16.5 | V |
| Transformer Resonance frequency (In-Circuit) | f_{RES} | | 180 | | 1200 | kHz |
| Thermal Shutdown Temperature | T_{SD} | | 130 | 140 | 150 | °C |
| Thermal Shutdown Hysteresis | T_{SDH} | | | 70 | | °C |
| VOLTAGE SUPPLY Pin | | | | | | |
| Easy Start Enable Voltage | $V_{CC(ES)}$ | LNK4114D / LNK4214D | | 6 | | V |
| | | LNK4115D / LNK4215D for $N_{STARTUP}$ Cycles, then 6 V | | 10 | | |
| Supply Voltage | $V_{VCC(RUN)}$ | To Enter Initialize Mode | 11.5 | 13.5 | 15.5 | V |
| | $V_{VCC(SLEEP)}$ | | | 4.5 | 5.1 | |
| | $V_{VCC(LOW)}$ | | | 5 | | |
| Supply Current | $I_{VCC(RUN)}$ | Average at f_{MAX} Excluding Base Drive Current | | 2 | | mA |
| | $I_{VCC(NL)}$ | No-Load | | 0.6 | | |
| | $I_{VCC(SLEEP)}$ | In Sleep Mode | | | | 15 |
| VCC Shunt Trigger Level | $V_{CC(HI)}$ | LNK4XX3D / LNK4XX4D / LNK4XX5D | | 15.5 | | V |
| FEEDBACK Pin | | | | | | |
| Feedback Regulation Level | $V_{FB(REG)}$ | $T_J = 25$ °C | 1.96 | 1.98 | 2.00 | V |
| Feedback Input Resistance | $R_{FB(IN)}$ | Effective Input Resistance $0 < V_{FB} < 5$ | | 2 | | MΩ |
| Feedback OVP Ratio | $G_{FB(OVP)}$ | | 1.19 | 1.20 | 1.21 | |
| Feedback UVP Ratio | $G_{FB(UVP)}$ | LNK40x3D/S | 0.62 | 0.63 | 0.64 | |

| Parameter | Symbol | Conditions $T_J = -25$ to 125 °C (Unless Otherwise Specified) | | Min | Typ | Max | Units | |
|--|-------------------|--|---|------------------------|--|----------------------|-------|---------|
| FEEDBACK Pin (Cont.) | | | | | | | | |
| Feedback Current Low Mains Threshold | $I_{FBHT(LO)}$ | | | -0.495 | -0.412 | -0.31 | mA | |
| Feedback Current Start Mains Threshold | $I_{FBHT(START)}$ | | | -1.05 | -0.9 | -0.75 | mA | |
| Feedback Blanking Time | $t_{FB(BL)}$ | Fixed for LNK40x2S and LNK43x2S | | | | 1.5 | | μ S |
| | | $\frac{V_{OUT}}{V_{OUT(CV)}} \leq 0.7$ | $R_{CS2} = 100 \Omega$ | | | 1.5 | | |
| | | | $R_{CS2} = 270 \Omega$ | | | 2.2 | | |
| | | | $R_{CS2} = 470 \Omega$ | | | 2.5 | | |
| | | | $R_{CS2} = 1000 \Omega$ | | | 2.5 | | |
| | | $\frac{V_{OUT}}{V_{OUT(CV)}} > 0.7$ | $R_{CS2} = 100 \Omega$ | | | 0.75 | | |
| | | | $R_{CS2} = 270 \Omega$ | | | 1.1 | | |
| | | | $R_{CS2} = 470 \Omega$ | | | 1.25 | | |
| $R_{CS2} = 1000 \Omega$ | | | | 1.25 | | | | |
| Start-up Cycle Count | $N_{STARTUP}$ | LNK40x3S / LNK40x3D | | | 600 | | | |
| | | LNK43xxS / LNK43xxD | | | 700 | | | |
| | | LNK4xx5D | | | 1700 | | | |
| Transient Detect Pulse Duration | t_{TD} | LNK40x3S / LNK40x3D / LNK40x4D / LNK4114D / LNK4214D / LNK4115D / LNK4215D | | | 100 | | ns | |
| Transient Detect Threshold | V_{TD} | LNK40x3S / LNK40x3D / LNK40x4D / LNK4114D / LNK4214D / LNK4115D / LNK4215D / LNK4323S / LNK4323D | | | 60 | | mV | |
| CURRENT SENSE Pin | | | | | | | | |
| Primary Current Sense Input Minimum Threshold | $V_{CS(MIN)}$ | Outside Primary Current Sense Blanking Time $t_{CS(B)}$ | LNK40x2S / LNK43x2S | | | -88 | | mV |
| | | | LNK40x3S LNK40x3D LNK40x4D LNK4114D LNK4214D LNK4115D LNK4215D LNK4323S LNK4323D (Set by External Resistor R_{CS2}) | $R_{CS2} = 100 \Omega$ | | -56 | | |
| | | | | $R_{CS2} = 270 \Omega$ | | -73 | | |
| | | | $R_{CS2} = 470 \Omega$ | | -94 | | | |
| | | | $R_{CS2} = 1000 \Omega$ | | -127 | | | |
| | | | Primary Current Sense Input Maximum Threshold | $V_{CS(OCF)}$ | Outside Primary Current Sense Blanking Time $t_{CS(B)}$ | Over-Current Protect | | |
| $V_{CS(MAX)}$ | Normal Regulation | | | -380 | | -360 | -340 | mV |
| Primary Current Sense Turn-Off Response Time | $t_{CS(OFF)}$ | Outside Primary Current Sense Blanking Time $t_{CS(B)}$ | | | 120 | | ns | |
| Primary Current Sense Threshold for CC Operation | $V_{CS(CC)}$ | $T_J = 25$ °C Except LNK4115D, LNK4214D, LNK4215D | | -62 | -60.8 | -59.6 | mV | |
| | | LNK4115D Only | | | -68 | | | |
| | | LNK4214D Only | | | -105 | | | |
| | | LNK4215D Only | | | -119 | | | |


| Parameter | Symbol | Conditions $T_j = -25$ to 125 °C (Unless Otherwise Specified) | | Min | Typ | Max | Units |
|----------------------------------|------------------|---|--|-----|-----|------|----------|
| CURRENT SENSE Pin (cont.) | | | | | | | |
| Leading Edge Blanking Time | $t_{CS(B)}$ | See Figure 8 | | | 375 | | ns |
| BASE DRIVE Pin | | | | | | | |
| Base Drive Force on Current | $I_{F(ON)}$ | LNK43x3S / LNK40x2S / LNK40x3S / LNK40x3D / LNK43x3D | | | 40 | | mA |
| | | LNK43x2S | | | 60 | | |
| | | LNK40x4D / LNK4114D / LNK4214D / LNK4115D / LNK4215D | | | 80 | | |
| Base Drive Force on Duration | $t_{F(ON)}$ | | | | 200 | | ns |
| Base Drive Source Current | $I_{BDSRC(MIN)}$ | LNK43x3S / LNK40x2S / LNK40x3S / LNK40x3D / LNK43x3D | | | 5 | | mA |
| | | LNK43x2S | | | 7.5 | | |
| | | LNK40x4D / LNK4114D / LNK4214D / LNK4115D / LNK4215D | | | 12 | | |
| | $I_{BDSRC(MAX)}$ | LNK43x3S / LNK40x2S / LNK40x3S / LNK40x3D / LNK43x3D | | | 40 | | |
| | | LNK43x2S | | | 60 | | |
| | | LNK40x4D / LNK4114D / LNK4214D / LNK4115D / LNK4215D | | | 80 | | |
| Base Drive Pull Down Resistance | $R_{BD(OFF)}$ | $V_{VCC} = 12$ V | LNK40x2S / LNK43x2S | | 4.5 | | Ω |
| | | | LNK4323S / LNK40x3S | | 3 | | |
| | | | LNK4323D / LNK40x3D | | 3 | | |
| | | | LNK40x4D / LNK4114D / LNK4214D / LNK4115D / LNK4215D | | 1.2 | | |
| Base Drive Minimum On-Time | $t_{BDON(MIN)}$ | | | | 375 | | ns |
| Base Drive Leakage Current | $I_{BD(SLEEP)}$ | In Sleep Mode, $T_j = 50$ °C | | | | 1 | μ A |
| Base Drive Peak Sink Current | $I_{BD(SINK)}$ | LNK40x2S / LNK43x2S | | | | 600 | mA |
| | | LNK40x3S / LNK4323S | | | | 700 | |
| | | LNK40x3 / LNK4323D | | | | 900 | |
| | | LNK40x4D / LNK4114D / LNK4214D / | | | | 1100 | |
| | | LNK4115D / LNK4215D | | | | 1300 | |

| Parameter | Symbol | Conditions $T_j = -25$ to 125 °C (Unless Otherwise Specified) | | Min | Typ | Max | Units |
|--|------------------|---|--|-----|-----|------|----------|
| EMITTER DRIVE Pin | | | | | | | |
| Emitter Drive On-State Resistance | $R_{ED(ON)}$ | $V_{VCC} = V_{VCC(SLEEP)}$ | LNK40x2S / LNK43x2S | | 3 | | Ω |
| | | | LNK40x3S / LNK4323S | | 1.5 | | |
| | | | LNK40x3D / LNK4323D | | 1.5 | | |
| | | | LNK40x4D / LNK4114D / LNK4214D / LNK4115D / LNK4215D | | 0.9 | | |
| Emitter Drive Leakage Current | $I_{ED(SLEEP)}$ | In Sleep Mode, $T_j = 50$ °C | LNK40x2S / LNK43x2S | | | 1 | μA |
| | | | LNK40x3S / LNK4323S | | | 1 | |
| | | | LNK40x3D / LNK4323D | | | 1 | |
| | | | LNK40x4D / LNK4114D / LNK4214D / LNK4115D / LNK4215D | | | 1 | |
| Emitter Drive Peak Sink Current | $I_{ED(SINK)}$ | LNK40x2S / LNK43x2S | | | | 600 | mA |
| | | LNK40x3S / LNK4323S | | | | 700 | |
| | | LNK40x3D / LNK4323D | | | | 900 | |
| | | LNK40x4D / LNK4114D / LNK4214D / LNK4115D / LNK4215D | | | | 1100 | |
| Emitter Drive Minimum On-Time | $t_{ED(MIN)}$ | LNK40x3S / LNK40x3D Only | | | 175 | | ns |
| SBD Pin | | | | | | | |
| SBD On-State Resistance | $R_{SBD(ON)}$ | LNK40x3D / LNK4323D | | | 8 | | Ω |
| | | LNK40x4D / LNK4114D / LNK4214D / LNK4115D / LNK4215D | | | 4 | | |
| SBD Leakage Current | $I_{SBD(SLEEP)}$ | In Sleep Mode, $T_j = 50$ °C | LNK40x3D / LNK40x4D / LNK4114D / LNK4214D / LNK4115D / LNK4215D / LNK4323D | | | 1 | μA |



NOTES:

- A. Min and Max values apply over the full range of normal operating conditions.
- B. Typical electrical characteristics apply at $T_j = T_j$ (typ).
- C. The chip is operating in Run mode.
- D. Voltages are specified with respect to the GROUND pin.

SOT-23-6

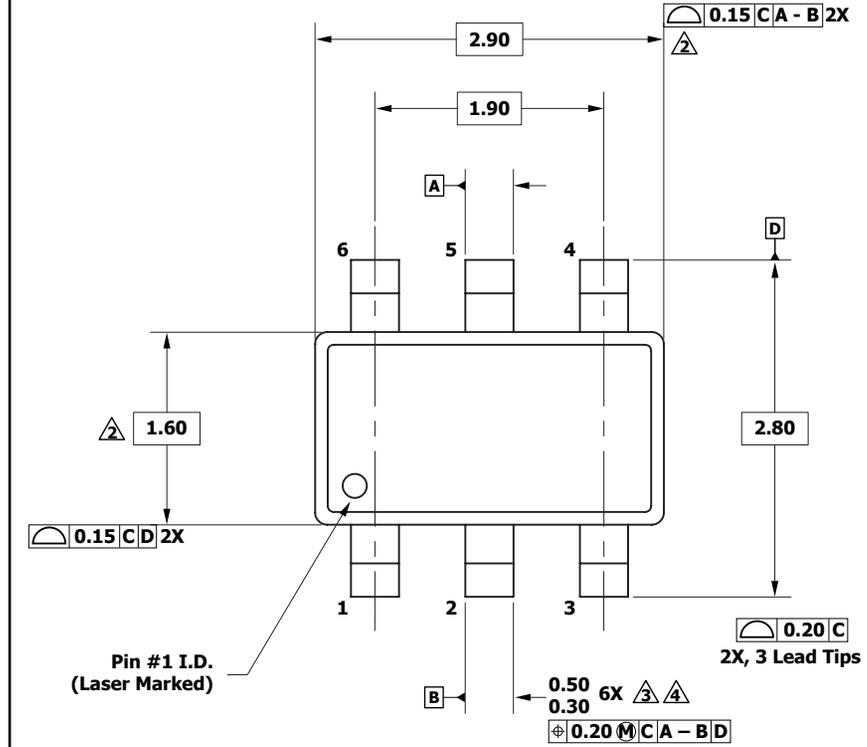


- Notes:
1. Dimensioning and tolerancing per ASME Y14.5M-1994.
 2. Dimensions noted are determined at the outermost extremes of the plastic body exclusive of mold flash, tie bar burrs, gate burrs, and inter-lead flash, but including any mismatch between the top and bottom of the plastic body. Maximum mold protrusion is 0.25 mm per side.
 3. Dimensions noted are inclusive of plating thickness.
 4. Does not include inter-lead flash or protrusions.
 5. Dimensions in millimeters.
 6. Datums A and B to be determined in Datum H.
 7. JEDEC reference: MO - 178.

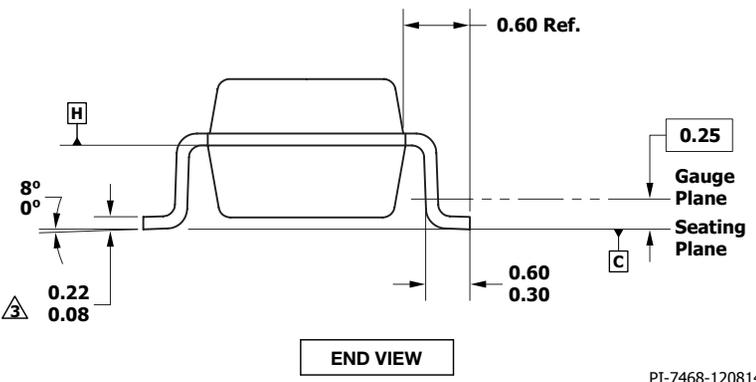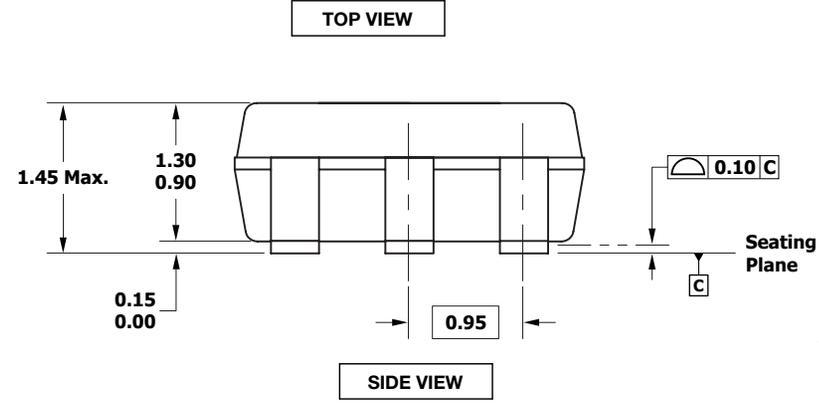

PI-7468-120814
 POD-SOT-23-6 Rev B

SO-8 (D Package)

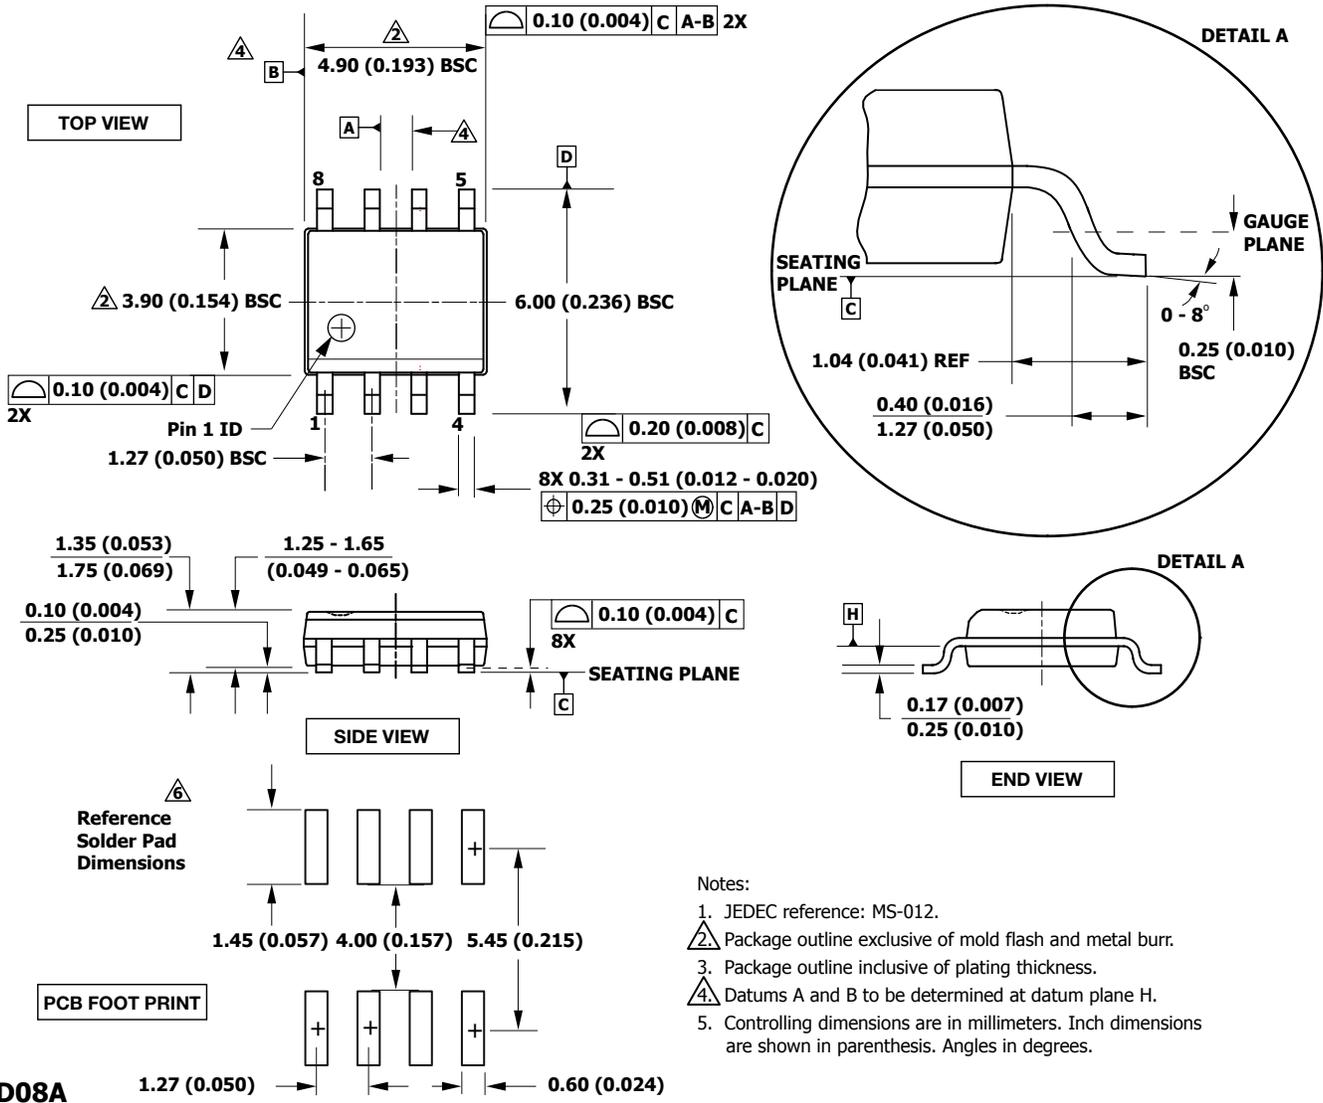

- Notes:
1. JEDEC reference: MS-012.
 2. Package outline exclusive of mold flash and metal burr.
 3. Package outline inclusive of plating thickness.
 4. Datums A and B to be determined at datum plane H.
 5. Controlling dimensions are in millimeters. Inch dimensions are shown in parenthesis. Angles in degrees.

PI-7461-120914


Part Ordering Table

| Product | f _{MAX} (kHz) | G _{CAB} (%) | Package Marking ¹ | Tape and Reel Part Number |
|-----------|------------------------|----------------------|------------------------------|---------------------------|
| *LNK4002S | 65 | 0 | BBxx | LNK4002S-TL |
| *LNK4012S | 65 | 3 | GBxx | LNK4012S-TL |
| *LNK4022S | 65 | 6 | BAxx | LNK4022S-TL |
| LNK4003S | 65 | 0 | DLxx | LNK4003S-TL |
| LNK4013S | 65 | 3 | DOxx | LNK4013S-TL |
| LNK4023S | 65 | 6 | DNxx | LNK4023S-TL |
| LNK4003D | 65 | 0 | LNK4003D | LNK4003D-TL |
| LNK4013D | 65 | 3 | LNK4013D | LNK4013D-TL |
| LNK4023D | 65 | 6 | LNK4023D | LNK4023D-TL |
| LNK4004D | 65 | 0 | LNK4004D | LNK4004D-TL |
| LNK4014D | 65 | 3 | LNK4014D | LNK4014D-TL |
| LNK4024D | 65 | 6 | LNK4024D | LNK4024D-TL |
| LNK4114D | 65 | 3 | LNK4114D | LNK4114D-TL |
| LNK4115D | 65 | 3 | LNK4115D | LNK4115D-TL |
| LNK4214D | 65 | 3 | LNK4214D | LNK4214D-TL |
| LNK4215D | 65 | 3 | LNK4215D | LNK4215D-TL |
| LNK4302S | 65 | 0 | BOxx | LNK4302S-TL |
| LNK4322S | 65 | 6 | BRxx | LNK4322S-TL |
| LNK4323S | 65 | 6 | DPxx | LNK4323S-TL |
| LNK4323D | 65 | 6 | LNK4323D | LNK4323D-TL |

NOTES:

- xx = Manufacturing lot code.
- *Not recommended for new designs.

Part Ordering Information

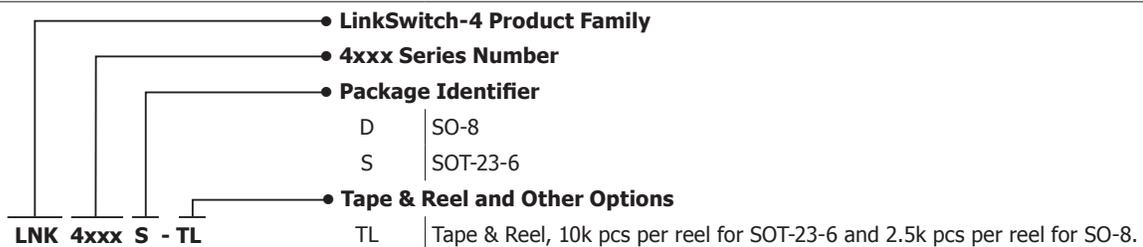

Notes

| Revision | Notes | Date |
|----------|---|----------|
| A | Initial Release. | 01/27/15 |
| B | Added Over-Temperature Protection section. Added LNK4012S, LNK4013S and LNK4013D parts. | 04/06/15 |
| C | Added LNK4114 and LNK4214 parts. | 09/15 |
| D | Added LNK4302S, LNK4312S, LNK4322S, LNK43x2S, LNK4115D and LNK4215D parts. | 05/16 |
| E | Added LNK4323S and LNK4323D parts. | 06/16 |

For the latest updates, visit our website: www.power.com

Power Integrations reserves the right to make changes to its products at any time to improve reliability or manufacturability. Power Integrations does not assume any liability arising from the use of any device or circuit described herein. POWER INTEGRATIONS MAKES NO WARRANTY HEREIN AND SPECIFICALLY DISCLAIMS ALL WARRANTIES INCLUDING, WITHOUT LIMITATION, THE IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, AND NON-INFRINGEMENT OF THIRD PARTY RIGHTS.

Patent Information

The products and applications illustrated herein (including transformer construction and circuits external to the products) may be covered by one or more U.S. and foreign patents, or potentially by pending U.S. and foreign patent applications assigned to Power Integrations. A complete list of Power Integrations patents may be found at www.power.com. Power Integrations grants its customers a license under certain patent rights as set forth at <http://www.power.com/ip.htm>.

Life Support Policy

POWER INTEGRATIONS PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF POWER INTEGRATIONS. As used herein:

1. A Life support device or system is one which, (i) is intended for surgical implant into the body, or (ii) supports or sustains life, and (iii) whose failure to perform, when properly used in accordance with instructions for use, can be reasonably expected to result in significant injury or death to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

The PI logo, TOPSwitch, TinySwitch, SENZero, SCALE-iDriver, Qspeed, PeakSwitch, LYTSwitch, LinkZero, LinkSwitch, InnoSwitch, HiperTFS, HiperPFS, HiperLCS, DPA-Switch, CAPZero, Clampless, EcoSmart, E-Shield, Filterfuse, FluxLink, StakFET, PI Expert and PI FACTS are trademarks of Power Integrations, Inc. Other trademarks are property of their respective companies. ©2016, Power Integrations, Inc.

Power Integrations Worldwide Sales Support Locations

World Headquarters

5245 Hellyer Avenue
San Jose, CA 95138, USA.
Main: +1-408-414-9200
Customer Service:
Phone: +1-408-414-9665
Fax: +1-408-414-9765
e-mail: usasales@power.com

China (Shanghai)

Rm 2410, Charity Plaza, No. 88
North Caoxi Road
Shanghai, PRC 200030
Phone: +86-21-6354-6323
Fax: +86-21-6354-6325
e-mail: chinasales@power.com

China (Shenzhen)

17/F, Hivac Building, No. 2, Keji Nan
8th Road, Nanshan District,
Shenzhen, China, 518057
Phone: +86-755-8672-8689
Fax: +86-755-8672-8690
e-mail: chinasales@power.com

Germany

Lindwurmstrasse 114
80337 Munich
Germany
Phone: +49-895-527-39110
Fax: +49-895-527-39200
e-mail: eurosales@power.com

Germany

HellwegForum 1
59469 Ense
Germany
Tel: +49-2938-64-39990
e-mail: igt-driver.sales@power.com

India

#1, 14th Main Road
Vasanthanagar
Bangalore-560052 India
Phone: +91-80-4113-8020
Fax: +91-80-4113-8023
e-mail: indiasales@power.com

Italy

Via Milanese 20, 3rd. Fl.
20099 Sesto San Giovanni (MI) Italy
Phone: +39-024-550-8701
Fax: +39-028-928-6009
e-mail: eurosales@power.com

Japan

Kosei Dai-3 Bldg.
2-12-11, Shin-Yokohama,
Kohoku-ku
Yokohama-shi, Kanagawa
222-0033 Japan
Phone: +81-45-471-1021
Fax: +81-45-471-3717
e-mail: japansales@power.com

Korea

RM 602, 6FL
Korea City Air Terminal B/D, 159-6
Samsung-Dong, Kangnam-Gu,
Seoul, 135-728, Korea
Phone: +82-2-2016-6610
Fax: +82-2-2016-6630
e-mail: koreasales@power.com

Singapore

51 Newton Road
#19-01/05 Goldhill Plaza
Singapore, 308900
Phone: +65-6358-2160
Fax: +65-6358-2015
e-mail: singaporesales@power.com

Taiwan

5F, No. 318, Nei Hu Rd., Sec. 1
Nei Hu Dist.
Taipei 11493, Taiwan R.O.C.
Phone: +886-2-2659-4570
Fax: +886-2-2659-4550
e-mail: taiwansales@power.com

UK

Cambridge Semiconductor,
a Power Integrations company
Westbrook Centre, Block 5, 2nd Floor
Milton Road
Cambridge CB4 1YG
Phone: +44 (0) 1223-446483
e-mail: eurosales@power.com