



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





ON Semiconductor®

<http://onsemi.com>

LV5696P

Bi-CMOS IC


System Power Supply IC for Automotive Infotainment Multiple Output Linear Voltage Regulator

Overview

The LV5696P is a multiple output linear regulator IC, which allows reduction of quiescent current. The LV5696P is specifically designed to address automotive infotainment systems power supply requirements. The LV5696P integrates 6 linear regulator outputs, a high side power switch, over current protection, overvoltage protection and thermal shutdown circuitry.

Function

- Low current consumption : typ 50 μ A
- 6 system of regulators
 - VDD (Micon) : VOUT 3.3/5.0V, IOU MAX 200mA
 - CD : VOUT 8.0V, IOU MAX 1000mA
 - Illumination : VOUT 3.0V to 8.0V (Adjustable external resistors), IOU MAX 200mA
 - Audio : VOUT 8.5V, IOU MAX 300mA
 - SYS : VOUT 5.0V, IOU MAX 500mA
 - DSP : VOUT 3.3V, IOU MAX 800mA
- 1 high-side switch coupled VCC
 - ANT : IOU MAX 200mA, VCC-VOUT = 0.5V
- Over current protection
- Over voltage protection typ 21V (All outputs except for VDD are turned off)
- Thermal shut down circuit typ 175°C
- Applied P-LDMOS to output stage



HZIP15J

(Warning) The protector functions only improve the IC's tolerance and they do not guarantee the safety of the IC if used under the conditions out of safety range or ratings. Use of the IC such as use under overcurrent protection range, thermal shutdown state may degrade the IC's reliability and eventually damage the IC.

ORDERING INFORMATION

See detailed ordering and shipping information on page 15 of this data sheet.

LV5696P

Specifications

Absolute Maximum Ratings at $T_a = 25^\circ\text{C}$

Parameter	Symbol	Conditions	Ratings	Unit
Maximum supply voltage	V_{CC} max		36	V
Power dissipation	P_d max	IC Unit	1.5	W
		At using Al heat sink of (50×50×1.5mm ³)	5.6	W
		Infinite large heat sink	32.5	W
Peak voltage	V_{CC} peak	See below about Pulse wave	50	V
Operating temperature	T_{opr}		-40 to +85	°C
Storage temperature	T_{stg}		-55 to +150	°C
Junction maximum temperature	T_j max		150	°C

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

Recommended Operating Conditions at $T_a = 25^\circ\text{C}$

Parameter	Conditions	Ratings	Unit
Power supply voltage rating 1	V_{DD} output, ANT output	7.5 to 16	V
Power supply voltage rating 2	AUDIO output	10.5 to 16	V
Power supply voltage rating 3	CD output, ILM output, SYS output, DSP output	10 to 16	V

*Make sure that V_{CC1} is as follows: $V_{CC1} > V_{CC} - 0.7V$

Functional operation above the stresses listed in the Recommended Operating Ranges is not implied. Extended exposure to stresses beyond the Recommended Operating Ranges limits may affect device reliability.

Electrical Characteristics at $T_a = 25^\circ\text{C}$, $V_{CC} = V_{CC1} = 14.4V$

Parameter	Symbol	Conditions	Ratings			Unit
			min	typ	max	
Quiescent current	I_{CC}	V_{DD} No Load, CTRL1/2/3 = [L/L/L]		50	100	μA
CTRL1 (ANT)						
Low input voltage	V_{IL1}	ANT: OFF	0		0.3	V
High input voltage	V_{IH1}	ANT: ON	2.7	3.3	5.5	V
Input impedance	R_{IN1}	input voltage $\leq 3.3V$	280	400	520	$k\Omega$
CTRL2 (ILM)						
Low input voltage	V_{IL2}	ILM: OFF	0		0.3	V
High input voltage	V_{IH2}	ILM: ON	2.7	3.3	5.5	V
Input impedance	R_{IN2}	input voltage $\leq 3.3V$	280	400	520	$k\Omega$
CTRL3						
Low input voltage	V_{IL3}	CD, AUDIO, SYS5V, DSP: OFF	0		0.3	V
Middle input voltage	V_{IM3}	CD, DSP:OFF SYS5V, AUDIO: ON	1.3	1.65	2.0	V
High input voltage	V_{IH3}	CD, AUDIO, SYS5V, DSP: ON	2.7	3.3	5.5	V
Input impedance	R_{IN3}	input voltage $\leq 3.3V$	280	400	520	$k\Omega$
V_{DD} output 5.0V/3.3V -ON ; $IKV_{DD} = V_{CC1} : V_{DD} = 5V/IKV_{DD} = GND : V_{DD} = 3.3V$						
V_{DD} output voltage 1	V_{O1}	$I_{O1} = 200\text{mA}$, $IKV_{DD} = V_{CC1}$	4.75	5.0	5.25	V
V_{DD} output voltage 2	V_{O1}'	$I_{O1} = 200\text{mA}$, $IKV_{DD} = GND$	3.13	3.3	3.47	V
V_{DD} output current	I_{O1}		200			mA
Line regulation	ΔV_{OLN1}	$7.5V < V_{CC} < 16V$, $I_{O1} = 200\text{mA}$		30	100	mV
Load regulation	ΔV_{OLD1}	$1\text{mA} < I_{O1} < 200\text{mA}$		70	150	mV
Dropout voltage 1	V_{DROP1}	$I_{O1} = 200\text{mA}$		1.0	1.5	V
Dropout voltage 2	V_{DROP1}'	$I_{O1} = 100\text{mA}$		0.5	0.75	V
Ripple rejection	R_{REJ1}	$f = 120\text{Hz}$, $I_{O1} = 200\text{mA}$	40	50		dB

Continued on next page.

LV5696P

Continued from preceding page.

Parameter	Symbol	Conditions	Ratings			Unit
			min	typ	max	
CD output 8.0V-ON ; CTRL3 = [H]						
CD output voltage	V _{O2}	I _{O2} = 1000mA	7.6	8.0	8.4	V
CD output current	I _{O2}		1000			mA
Line regulation	ΔV _{OLN2}	10.5V < V _{CC} < 16V, I _{O3} = 1000mA		50	100	mV
Load regulation	ΔV _{OLD2}	10mA < I _{O2} < 1000mA		100	200	mV
Dropout voltage 1	V _{DROP2}	I _{O2} = 1000mA		1.0	1.5	V
Dropout voltage 2	V _{DROP2'}	I _{O2} = 500mA		0.5	0.75	V
Ripple rejection	R _{REJ2}	f = 120Hz, I _{O2} = 1000mA	40	50		dB
ILM output 3.0 to 8.0V-ON ; CTRL2 = [H]						
ILM_ADJ voltage	V _{I3}		1.222	1.260	1.298	V
ILM_ADJ current	I _{I3}		-1		1	μA
ILM output voltage1	V _{O3}	I _{O3} = 200mA, R1 = 300kΩ, R2 = 56kΩ	7.65	8.0	8.35	V
ILM output voltage2	V _{O3'}	I _{O3} = 200mA, R1 = 51kΩ, R2 = 36kΩ	2.86	3.0	3.14	V
ILM output current	I _{O3}	R1 = 300kΩ, R2 = 56kΩ	200			mA
Line regulation	ΔV _{OLN3}	10.5V < V _{CC} < 16V, I _{O4} = 200mA		30	90	mV
Load regulation	ΔV _{OLD3}	1mA < I _{O3} < 200mA		70	150	mV
Dropout voltage 1	V _{DROP3}	I _{O3} = 200mA		0.7	1.05	V
Dropout voltage 2	V _{DROP3'}	I _{O3} = 100mA		0.35	0.53	V
Ripple rejection	R _{REJ3}	f = 120Hz, I _{O4} = 200mA	40	50		dB
AUDIO output 8.5V-ON ; CTRL3 = [M or H]						
AUDIO output voltage	V _{O4}	I _{O4} = 300mA	8.07	8.5	8.93	V
AUDIO output current	I _{O4}		300			mA
Line regulation	ΔV _{OLN4}	10.5V < V _{CC} < 16V, I _{O4} = 300mA		30	90	mV
Load regulation	ΔV _{OLD4}	1mA < I _{O4} < 300mA		70	150	mV
Dropout voltage 1	V _{DROP4}	I _{O4} = 200mA		0.7	1.05	V
Dropout voltage 2	V _{DROP4'}	I _{O4} = 100mA		0.35	0.53	V
Ripple rejection	R _{REJ4}	f = 120Hz, I _{O4} = 300mA	40	50		dB
SYS output 5.0V-ON ; CTRL3 = [M or H]						
SYS output voltage	V _{O5}	I _{O5} = 500mA	4.75	5.0	5.25	V
SYS output current	I _{O5}		500			mA
Line regulation	ΔV _{OLN5}	10.5V < V _{CC} < 16V, I _{O5} = 500mA		30	90	mV
Load regulation	ΔV _{OLD5}	1mA < I _{O5} < 500mA		70	150	mV
Dropout voltage	V _{DROP5}	I _{O5} = 500mA		1.3	2.5	V
Ripple rejection	R _{REJ5}	f = 120Hz, I _{O5} = 500mA	40	50		dB
DSP output 3.3V-ON ; CTRL3 = [H]						
DSP output voltage	V _{O6}	I _{O6} = 800mA	3.13	3.3	3.47	V
DSP output current	I _{O6}		800			mA
Line regulation	ΔV _{OLN6}	10.5V < V _{CC} < 16V, I _{O6} = 800mA		30	90	mV
Load regulation	ΔV _{OLD6}	1mA < I _{O6} < 800mA		70	150	mV
Dropout voltage	V _{DROP6}	I _{O6} = 800mA		1.5	3.0	V
Ripple rejection	R _{REJ6}	f = 120Hz, I _{O6} = 800mA	40	50		dB
ANT Remote-ON ; CTRL1 = [H]						
Output voltage	V _{O7}	I _{O7} = 200mA	V _{CC} -1.0	V _{CC} -0.5		V
Output current	I _{O7}	V _{O7} ≥ V _{CC} -1.0	200			mA



Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

LV5696P

Package Dimensions

unit : mm


HZIP15J
CASE 945AC
ISSUE A

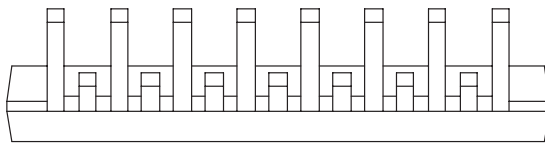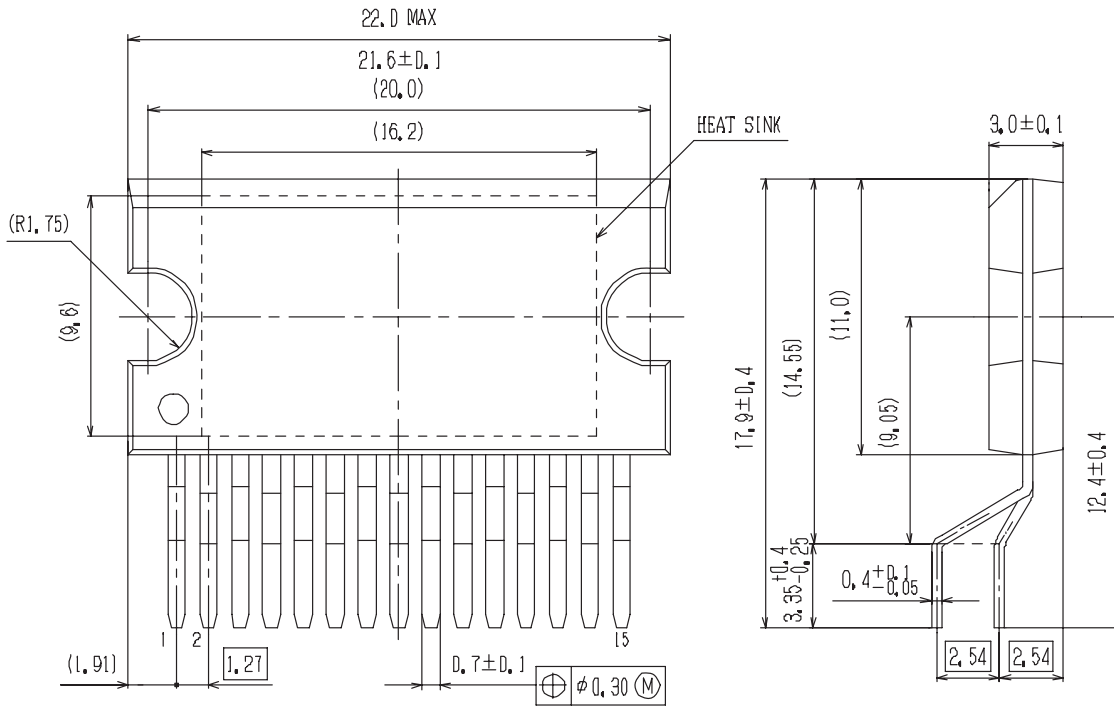

SOLDERING FOOTPRINT*

(Unit: mm)


○ Through Hole Area

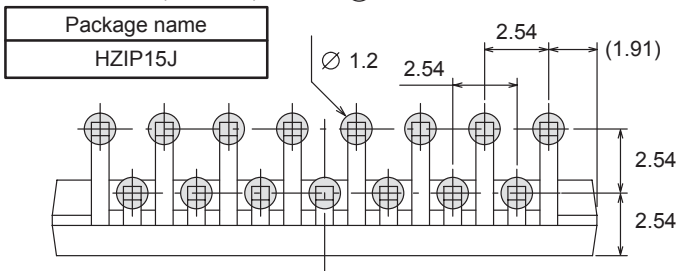

NOTE: The measurements are not to guarantee but for reference only.

*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.


GENERIC MARKING DIAGRAM*




XXXXX = Specific Device Code
Y = Year
M = Month
DDD = Additional Traceability Data

*This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot "▪", may or may not be present.

- Allowable power dissipation derating curve

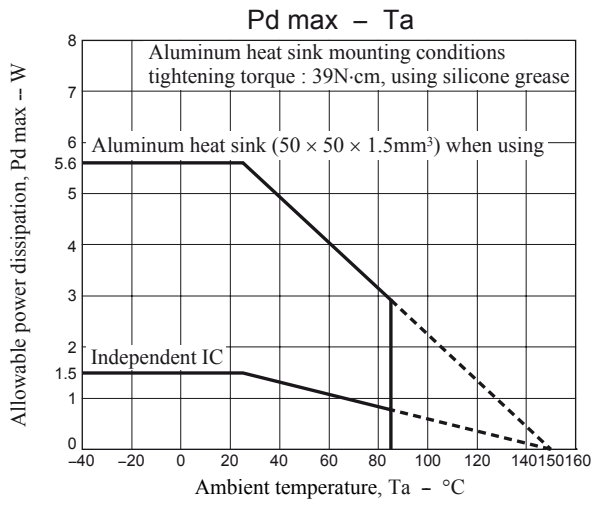

- Peak Voltage testing pulse wave

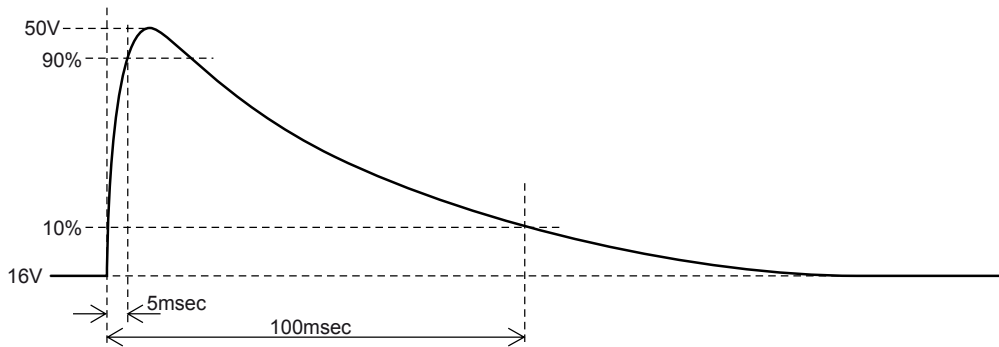

CTRL logic truth table


CTRL1	ANT
L	OFF
H	ON

CTRL2	ILM
L	OFF
H	ON

CTRL3	AUDIO	SYS	CD	DSP
L	OFF	OFF	OFF	OFF
M	ON	ON	OFF	OFF
H	ON	ON	ON	ON

LV5696P

Block Diagram

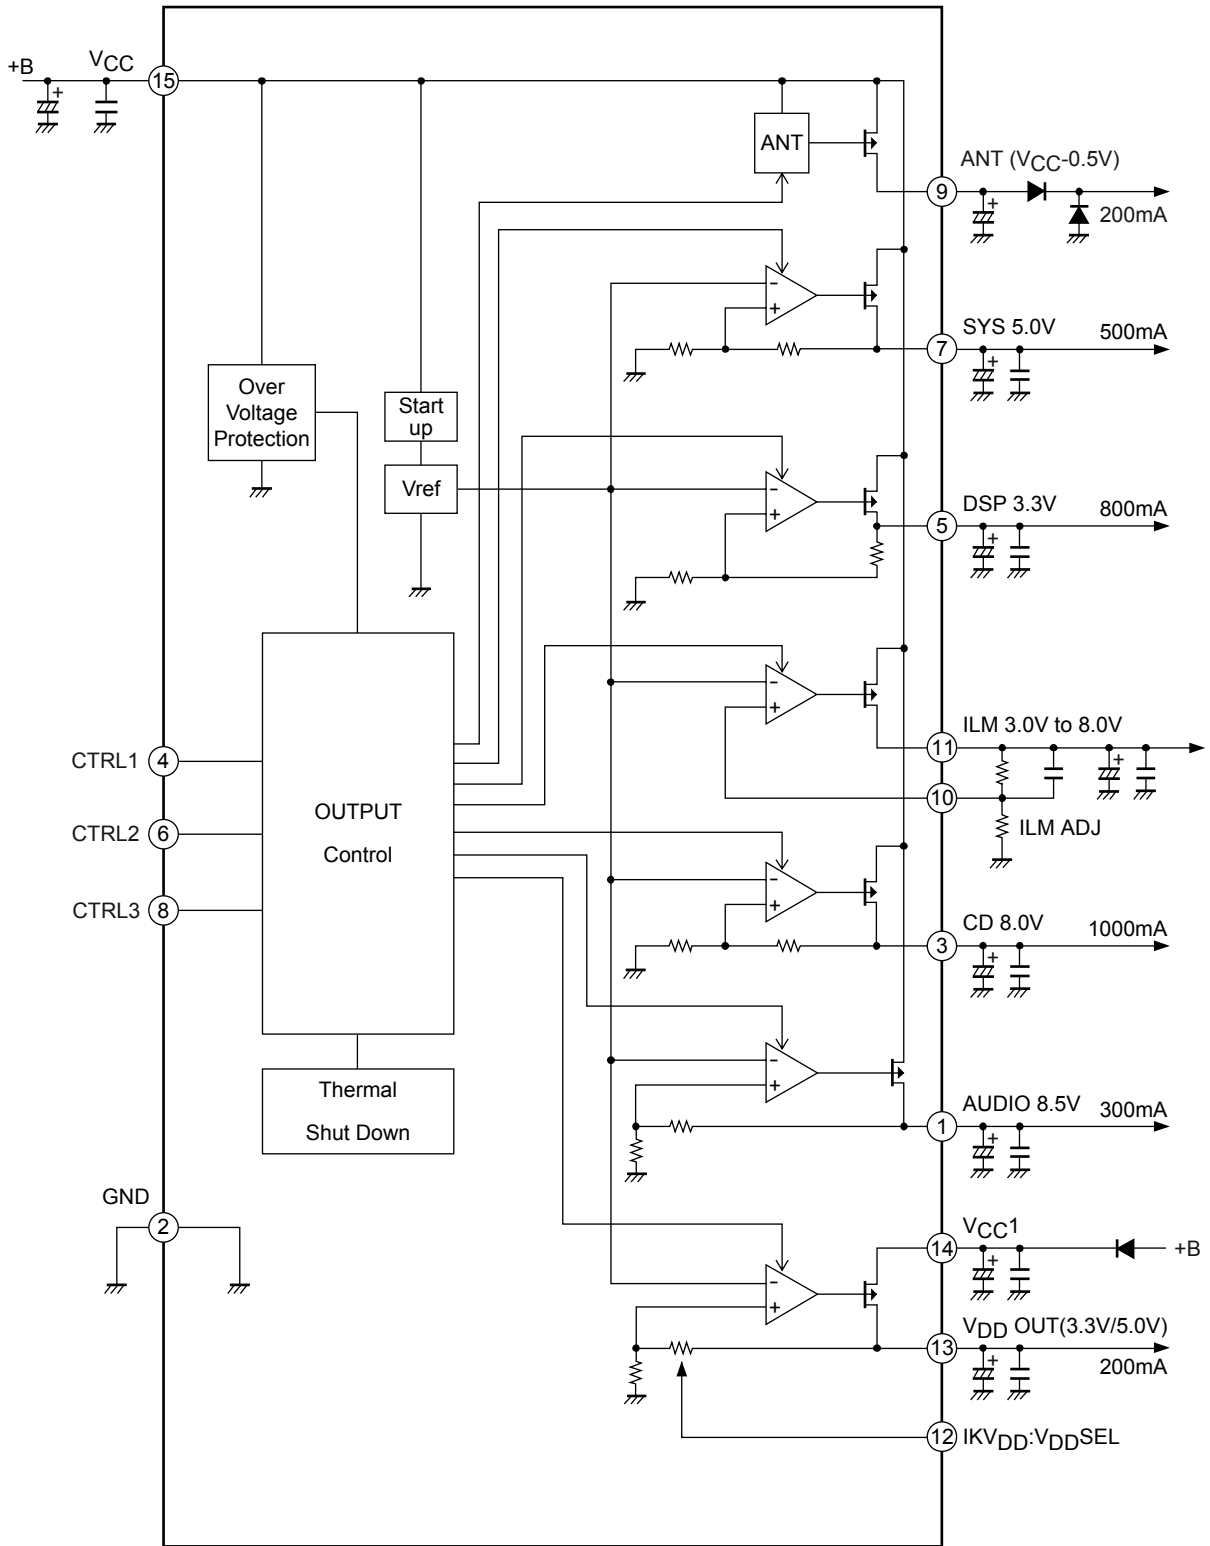

LV5696P

Pin Function

Pin No.	Pin name	Description	Equivalent Circuit
1	AUDIO	AUDIO output pin CTRL3 = M, H-ON 8.5V/0.3A	
2	GND	GND pin	
3	CD	CD output pin CTRL3 = H-ON 8.0V/1.0A	
4	CTRL1	CTRL1 input pin Input of two values	
5	DSP	DSP output pin CTRL3 = H-ON 3.3V/0.8A	

Continued on next page.

LV5696P

Continued from preceding page.

Pin No.	Pin name	Description	Equivalent Circuit
6	CTRL2	CTRL2 input pin Input of two values	
7	SYS	SYS output pin CTRL3 = M, H-ON 5.0V/0.5A	
8	CTRL3	CTRL3 input pin Input of three values	
9	ANT	ANT output pin CTRL1 = H-ON VCC-0.5V/0.2A	

Continued on next page.


LV5696P

Continued from preceding page.

Pin No.	Pin name	Description	Equivalent Circuit
10	ILM ADJ	ILM feedback pin	
11	ILM	ILM output pin CTRL2 = H-ON 3.0 to 8.0V/0.2A	
12	IKV _{DD}	V _{DD} Voltage switch control input pin V _{CC1} /GND	
13	V _{DD}	V _{DD} output pin 5.0V/0.2A (IKV _{DD} = V _{CC1}) 3.3V/0.2A (IKCD = GND)	
14	V _{CC1}	V _{DD} power supply pin	
15	V _{CC}	Power supply pin	


Continued on next page.

Timing Chart

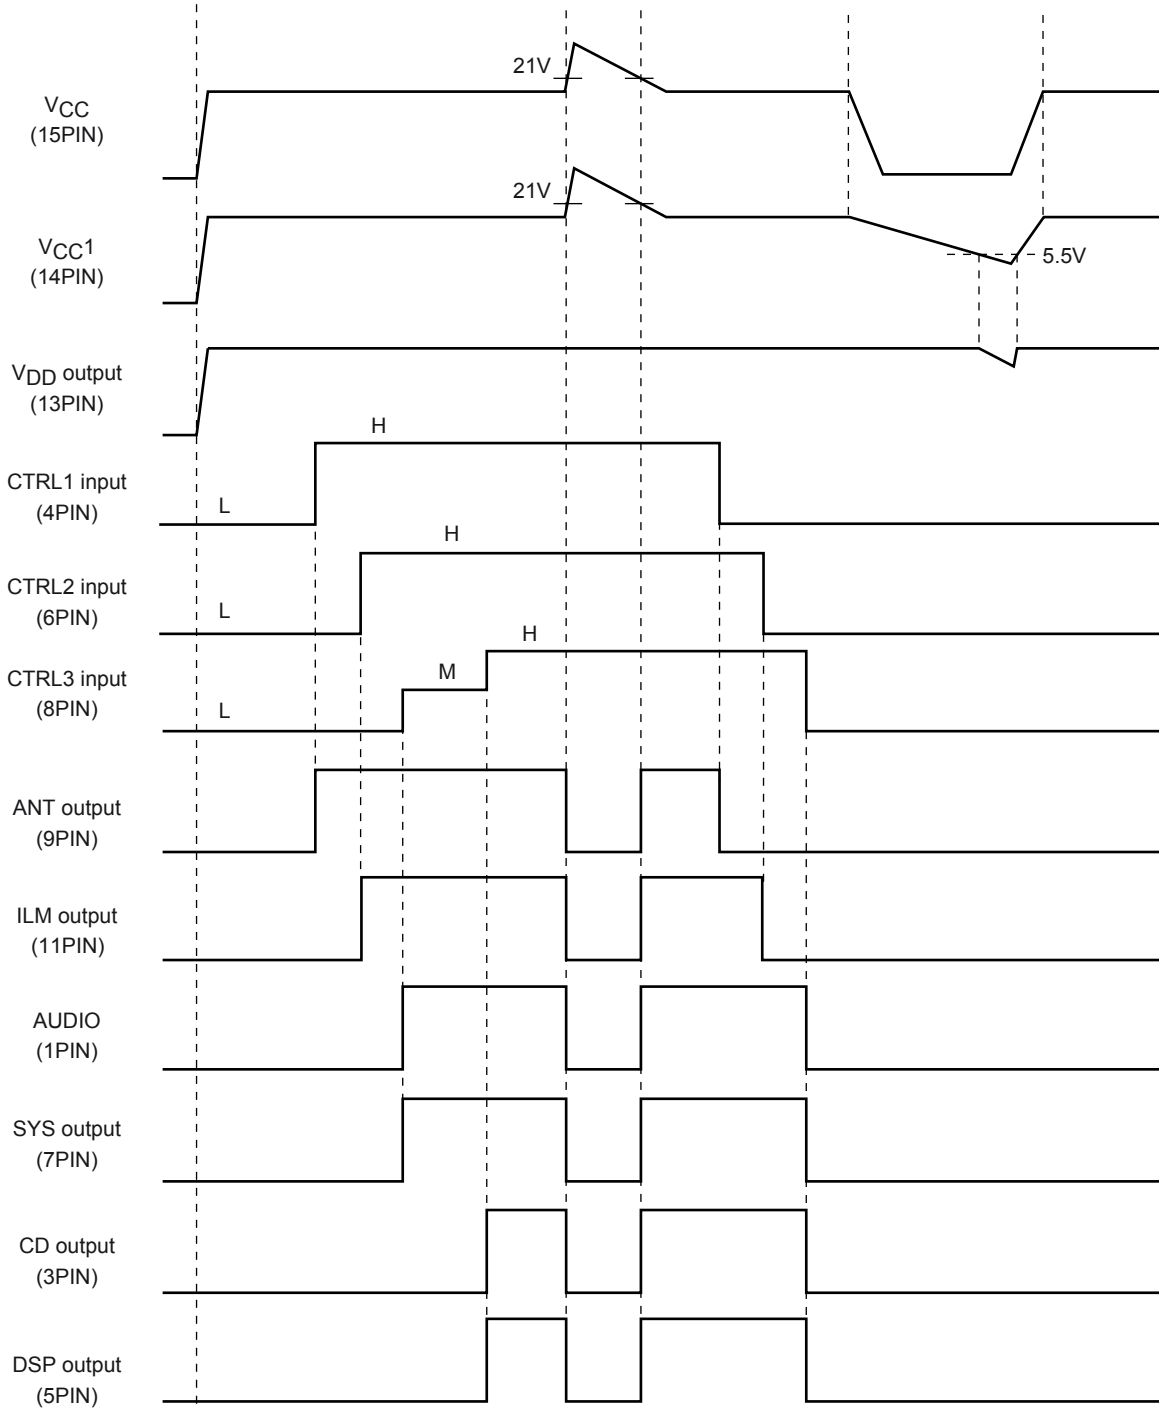

LV5696P

Application circuit example

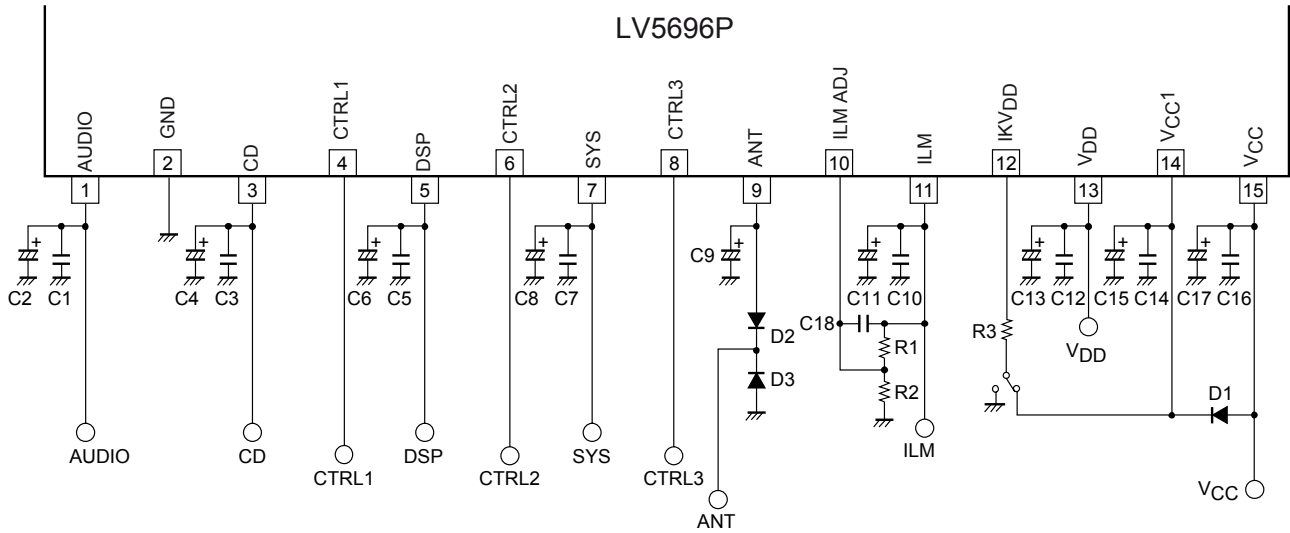

External Parts Lineup


Part name	Description	Recommended value	Note
C2, C4, C6, C8, C11, C13	Output stabilization capacitor	10 μ F or more (*1)	Electrolytic capacitor
C1, C3, C5, C7, C10, C12	Output stabilization capacitor	0.22 μ F or more (*1)	Ceramic capacitor
C18	Output stabilization capacitor	20pF	Ceramic capacitor
C15, C17	Bypass capacitor	100 μ F or more	Connect a capacitor as close as possible to V _{CC} pin and GND pin.
C14, C16	Prevent oscillation capacitor	0.22 μ F or more	
C9	Output stabilization capacitor	2.2 μ F or more	
R1, R2	Feedback resistor	ILM output voltage R1/R2: 300k Ω /56k Ω = 8.0V R1/R2: 51k Ω /36k Ω = 3.0V	A resistor with resistance accuracy as low as less \pm 1% must be used.
R3	Protective resistor	10 to 100k Ω	
D1	Backflow prevention diode		
D2, D3	Internal element Protection diode	SB1003M3	

(*1) Make sure that output capacitors is 10 μ F or more and ESR 10 Ω or less in total, in which voltage and temperature fluctuation and unit differences are taken into consideration. Moreover, high frequency characteristics of electrolytic capacitor should be sufficient.

Furthermore, the values listed above do not guarantee stabilization during the over current protection operations of the regulator, so oscillation may occur during an over current protection operation.

LV5696P

ILM output voltage setting method

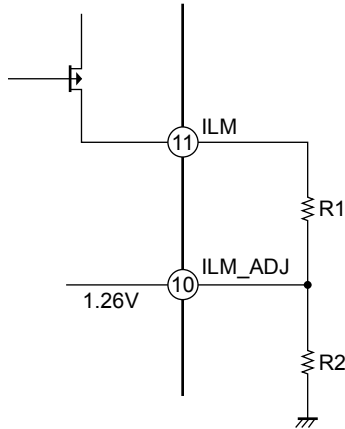

ILM_ADJ is equal to bandgap reference voltage (typ = 1.26V).

ILM calculating formula

$$ILM = \frac{1.26[V]}{R_2} \times R_1 + 1.26[V]$$

$$\frac{R_1}{R_2} = \frac{(ILM - 1.26)}{1.26}$$

Please design so that the ratio of R1 and R2 may fill the above-mentioned expression for the set ILM voltage.

(Ex.) Setup to ILM = 8.0V


$$\frac{R_1}{R_2} = \frac{(8.0 - 1.26)}{1.26} \cong 5.349$$

$$\frac{R_1}{R_2} = \frac{300k\Omega}{56k\Omega} \cong 5.357$$

$$ILM = 1.26V \times 5.357 + 1.26V \cong 8.010V$$

Note : The above-mentioned are all the values at the typical. The error margin of output voltage is caused by the influence of the manufacturing variations of IC and external resistance.

CTRL3 Application Circuit



Input 3.3V : R1 = R2 = 47kΩ

A	B	CTRL3
0V	0V	0V
0V	3.3V	1.56V
3.3V	0V	1.56V
3.3V	3.3V	3.12V



HZIP15J Heat sink attachment

Heat sinks are used to lower the semiconductor device junction temperature by leading the heat generated by the device to the outer environment and dissipating that heat.

- a. Unless otherwise specified, for power ICs with tabs and power ICs with attached heat sinks, solder must not be applied to the heat sink or tabs.

b. Heat sink attachment

- Use flat-head screws to attach heat sinks.
- Use also washer to protect the package.
- Use tightening torques in the ranges 39-59Ncm (4-6kgcm) .
- If tapping screws are used, do not use screws with a diameter larger than the holes in the semiconductor device itself.
- Do not make gap, dust, or other contaminants to get between the semiconductor device and the tab or heat sink.
- Take care a position of via hole .
- Do not allow dirt, dust, or other contaminants to get between the semiconductor device and the tab or heat sink.
- Verify that there are no press burrs or screw-hole burrs on the heat sink.
- Warping in heat sinks and printed circuit boards must be no more than 0.05 mm between screw holes, for either concave or convex warping.
- Twisting must be limited to under 0.05 mm.
- Heat sink and semiconductor device are mounted in parallel.
Take care of electric or compressed air drivers
- The speed of these torque wrenches should never exceed 700 rpm, and should typically be about 400 rpm.

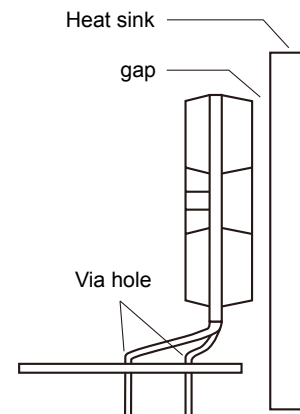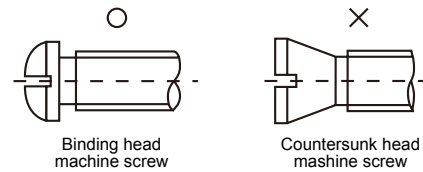

c. Silicone grease

- Spread the silicone grease evenly when mounting heat sinks.
- Our company recommends YG-6260 (Momentive Performance Materials Japan LLC)

d. Mount

- First mount the heat sink on the semiconductor device, and then mount that assembly on the printed circuit board.
- When attaching a heat sink after mounting a semiconductor device into the printed circuit board, when tightening up a heat sink with the screw, the mechanical stress which is impossible to the semiconductor device and the pin doesn't hang.

e. When mounting the semiconductor device to the heat sink using jigs, etc.,

- Take care not to allow the device to ride onto the jig or positioning dowel.
- Design the jig so that no unreasonable mechanical stress is not applied to the semiconductor device.

f. Heat sink screw holes

- Be sure that chamfering and shear drop of heat sinks must not be larger than the diameter of screw head used.
- When using nuts, do not make the heat sink hole diameters larger than the diameter of the head of the screws used. A hole diameter about 15% larger than the diameter of the screw is desirable.
- When tap screws are used, be sure that the diameter of the holes in the heat sink are not too small. A diameter about 15% smaller than the diameter of the screw is desirable.

- g. There is a method to mount the semiconductor device to the heat sink by using a spring band. But this method is not recommended because of possible displacement due to fluctuation of the spring force with time or vibration.

LV5696P

ORDERING INFORMATION

Device	Package	Shipping (Qty / Packing)
LV5696P-E	HZIP15J (Pb-Free)	20 / Fan-Fold

ON Semiconductor and the ON logo are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of SCILLC's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.