



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us



Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



### HVIC High Voltage Half-Bridge Driver 600 Volts/±100mA

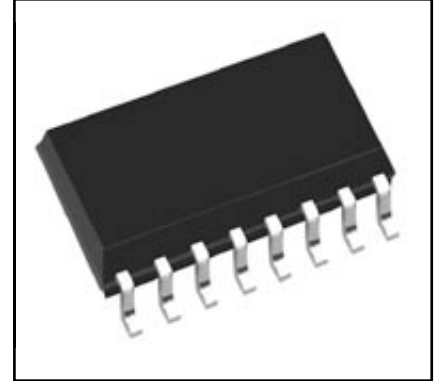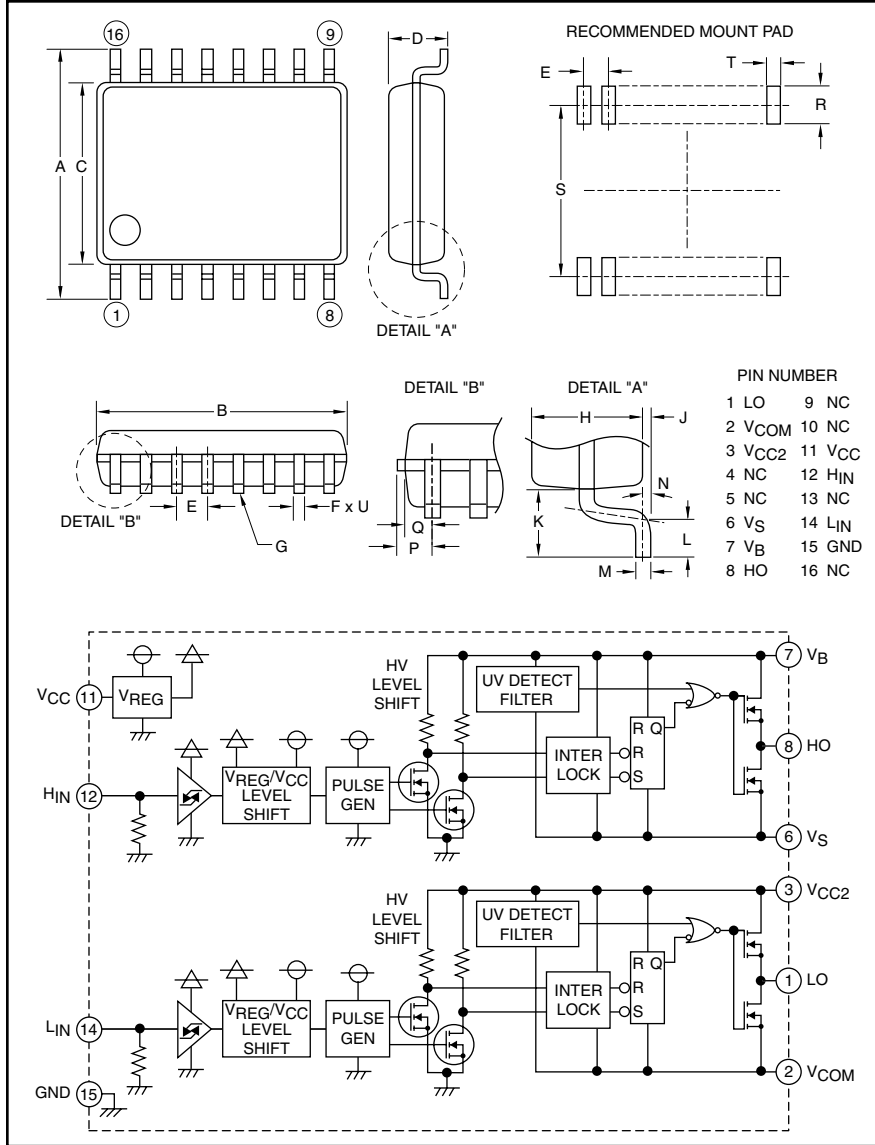

**Description:**  
M81707FP is a high voltage Power MOSFET and IGBT module driver for half-bridge applications.

**Features:**

- Output Current ±100mA
- Half-Bridge Driver
- SOP-16 Package

**Applications:**

- HID Ballast
- PDP
- MOSFET Driver
- IGBT Driver
- Inverter Module Control

**Ordering Information:**

M81707FP is a ±100mA, 600 Volt HVIC, High Voltage Half-Bridge Driver

**Outline Drawing and Circuit Diagram**

Dimensions	Inches	Millimeters
A	0.31±0.01	7.8±0.3
B	0.41±0.004	10.1±0.1
C	0.21±0.004	5.3±0.1
D	0.12	2.10
E	0.05	1.27
F	0.02±0.002	0.4±0.05
G	0.004	0.1
H	0.07	1.8
J	0.01±0.004	0.1±0.1
K	0.05	1.25

Dimensions	Inches	Millimeters
L	0.024±0.008	0.6±0.2
M	0.1±0.002	0.2±0.05
N	8°	8°
P	0.03	0.755
Q	0.023	0.605
R	0.05 Min.	1.27 Min.
S	0.30	7.62
T	0.029	0.76
U	0.098 Dia.	0.25 Dia.



Powerex, Inc., 200 E. Hillis Street, Youngwood, Pennsylvania 15697-1800 (724) 925-7272

**M81707FP**

**HVIC, High Voltage Half-Bridge Driver**

600 Volts/±100mA

**Absolute Maximum Ratings,  $T_a = 25^\circ\text{C}$  unless otherwise specified**

Characteristics	Symbol	M81707FP	Units
High Side Floating Supply Absolute Voltage	$V_B$	-0.5 ~ 624	Volts
High Side Floating Supply Offset Voltage	$V_S$	$V_B - 24 \sim V_B + 0.5$	Volts
High Side Floating Supply Voltage ( $V_{BS} = V_B - V_S$ )	$V_{BS}$	-0.5 ~ 24	Volts
High Side Output Voltage	$V_{HO}$	$V_S - 0.5 \sim V_B + 0.5$	Volts
Low Side Floating Supply Absolute Voltage	$V_{CC2}$	-0.5 ~ 624	Volts
Output Standard Voltage	$V_{com}$	$V_{CC2} - 24 \sim V_{CC2} + 0.5$	Volts
Low Side Floating Supply Voltage ( $V_{CC2com} = V_{CC2} - V_{com}$ )	$V_{CC2com}$	-0.5 ~ 24	Volts
Low Side Output Voltage	$V_{LO}$	$V_{com} - 0.5 \sim V_{CC2} + 0.5$	Volts
Low Side Fixed Supply Voltage	$V_{CC}$	-0.5 ~ 24	Volts
Logic Input Voltage ( $H_{IN}, L_{IN}$ )	$V_{IN}$	-0.5 ~ $V_{CC} + 0.5$	Volts
Allowable Offset Voltage Transient	$dV_s/dt$	±50	Volts/ns
Package Power Dissipation ( $T_a = 25^\circ\text{C}$ , On Board)	$P_d$	0.89	Watts
Linear Derating Factor ( $T_a > 25^\circ\text{C}$ , On Board)	$K_\theta$	-8.9	mW/°C
Junction to Case Thermal Resistance	$R_{th(j-c)}$	45	°C/W
Junction Temperature	$T_j$	-40 ~ 125	°C
Operation Temperature	$T_{opr}$	-40 ~ 100	°C
Storage Temperature	$T_{stg}$	-55 ~ 125	°C
Solder Heat Resistance (Pb Free)	$T_L$	255 : 10s, Max. 260	°C

**Recommended Operating Conditions**

Characteristics	Symbol	Test Conditions	Min.	Typ.	Max.	Units
High Side Floating Supply Absolute Voltage	$V_B$		$V_S + 10$	—	$V_S + 20$	Volts
High Side Floating Supply Offset Voltage	$V_S$	$V_B > 10V$	-5	—	500	Volts
High Side Floating Supply Voltage	$V_{BS}$	$V_B = V_B - V_S$	10	—	20	Volts
High Side Output Voltage	$V_{HO}$		$V_S$	—	$V_B$	Volts
Low Side Floating Supply Absolute Voltage	$V_{CC2}$		$V_{com} + 10$	—	$V_{com} + 20$	Volts
Output Standard Voltage	$V_{com}$	$V_{CC2} > 10V$	-5	—	500	Volts
Low Side Floating Supply Voltage	$V_{CC2com}$	$V_{CC2com} = V_{CC2} - V_{com}$	10	—	20	Volts
Low Side Output Voltage	$V_{LO}$		$V_{com}$	—	$V_{CC2}$	Volts
Low Side Fixed Supply Voltage	$V_{CC}$		10	—	20	Volts
Logic Input Voltage	$V_{IN}$	$H_{IN}, L_{IN}$	0	—	$V_{CC}$	Volts

**M81707FP**

**HVIC, High Voltage Half-Bridge Driver**

600 Volts/±100mA

**Electrical Characteristics**

**T<sub>a</sub> = 25°C, V<sub>CC</sub> = V<sub>BS</sub> (= V<sub>B</sub> - V<sub>S</sub>) = 15V unless otherwise specified**


Characteristics	Symbol	Test Conditions	Min.	Typ.	Max.	Units
Floating Supply Leakage Current	I <sub>FS</sub>	V <sub>B</sub> = V <sub>S</sub> = 600V	—	—	1.0	μA
V <sub>com</sub> Floating Supply Leakage Current	I <sub>FScom</sub>	V <sub>CC2</sub> = V <sub>com</sub> = 600V	—	—	1.0	μA
V <sub>BS</sub> Standby Current	I <sub>BS</sub>	H <sub>IN</sub> = L <sub>IN</sub> = 0V	—	0.18	0.4	mA
V <sub>CC</sub> Standby Current	I <sub>CC</sub>	H <sub>IN</sub> = L <sub>IN</sub> = 0V	—	0.30	0.6	mA
V <sub>CC2</sub> Standby Current	I <sub>CC2</sub>	H <sub>IN</sub> = L <sub>IN</sub> = 0V	—	0.18	0.4	mA
V <sub>BS</sub> Standby Current H	I <sub>BSH</sub>	H <sub>IN</sub> = 5V	—	0.25	0.5	mA
V <sub>CC</sub> Standby Current H	I <sub>CCH</sub>	H <sub>IN</sub> = 5V	—	0.37	0.75	mA
V <sub>CC2</sub> Standby Current H	I <sub>CC2H</sub>	H <sub>IN</sub> = 5V	—	0.18	0.4	mA
V <sub>BS</sub> Standby Current L	I <sub>BSL</sub>	L <sub>IN</sub> = 5V	—	0.18	0.4	mA
V <sub>CC</sub> Standby Current L	I <sub>CCCL</sub>	L <sub>IN</sub> = 5V	—	0.37	0.75	mA
V <sub>CC2</sub> Standby Current L	I <sub>CC2L</sub>	L <sub>IN</sub> = 5V	—	0.25	0.5	mA
High Level Output Voltage	V <sub>OH</sub>	I <sub>O</sub> = 0A, LO, HO	14.9	—	—	Volts
Low Level Output Voltage	V <sub>OL</sub>	I <sub>O</sub> = 0A, LO, HO	—	—	0.1	Volts
High Level Input Threshold Voltage	V <sub>IH</sub>	H <sub>IN</sub> , L <sub>IN</sub>	2.0	3.0	4.0	Volts
Low Level Input Threshold Voltage	V <sub>IL</sub>	H <sub>IN</sub> , L <sub>IN</sub>	0.6	1.5	2.5	Volts
Input Hysteresis Voltage	V <sub>INh</sub>	V <sub>INh</sub> = V <sub>IH</sub> - V <sub>IL</sub>	1.0	1.5	2.0	Volts
High Level Input Bias Current 5	I <sub>IH5</sub>	V <sub>IN</sub> = 5V	—	25	75	μA
High Level Input Bias Current 15	I <sub>IH15</sub>	V <sub>IN</sub> = 15V	—	75	150	μA
Low Level Input Bias Current	I <sub>IL</sub>	V <sub>IN</sub> = 0V	—	—	1.0	μA
V <sub>BS</sub> Supply UV Reset Voltage	V <sub>BSuvr</sub>		7.5	8.6	9.7	Volts
V <sub>BS</sub> Supply UV Hysteresis Voltage	V <sub>BSuvh</sub>		0.1	0.4	0.7	Volts
V <sub>BS</sub> Supply UV Filter Time	t <sub>BSuv</sub>		—	7.5	—	μs
V <sub>CC</sub> Supply UV Reset Voltage	V <sub>CCuvr</sub>		7.5	8.6	9.7	Volts
V <sub>CC</sub> Supply UV Hysteresis Voltage	V <sub>CCuvh</sub>		0.1	0.4	0.7	Volts
V <sub>CC</sub> Supply UV Filter Time	t <sub>CCuv</sub>		—	7.5	—	μs
Output High Level Short Circuit Pulsed Current	I <sub>OH</sub>	V <sub>O</sub> = 0V, V <sub>IN</sub> = 5V, P <sub>W</sub> < 10μs	-60	-100	-140	mA
Output Low Level Short Circuit Pulsed Current	I <sub>OL</sub>	V <sub>O</sub> = 15V, V <sub>IN</sub> = 0V, P <sub>W</sub> < 10μs	60	100	140	mA
Output High Level ON Resistance	R <sub>OH</sub>	I <sub>O</sub> = -20mA, R <sub>OH</sub> = (V <sub>OH</sub> - V <sub>O</sub> )/I <sub>O</sub>	—	35	70	Ω
Output Low Level ON Resistance	R <sub>OL</sub>	I <sub>O</sub> = 20mA, R <sub>OL</sub> = V <sub>O</sub> /I <sub>O</sub>	—	50	100	Ω
High Side Turn-On Propagation Delay	t <sub>dLH(HO)</sub>	C <sub>L</sub> = 200pF between HO - V <sub>S</sub>	85	110	135	ns
High Side Turn-Off Propagation Delay	t <sub>dHL(HO)</sub>	C <sub>L</sub> = 200pF between HO - V <sub>S</sub>	100	130	160	ns
High Side Turn-On Rise Time	t <sub>rH</sub>	C <sub>L</sub> = 200pF between HO - V <sub>S</sub>	15	30	70	ns
High Side Turn-Off Fall Time	t <sub>fH</sub>	C <sub>L</sub> = 200pF between HO - V <sub>S</sub>	20	45	90	ns
LowSide Turn-On Propagation Delay	t <sub>dLH(LO)</sub>	C <sub>L</sub> = 200pF between LO - GND	85	110	135	ns
Low Side Turn-Off Propagation Delay	t <sub>dHL(LO)</sub>	C <sub>L</sub> = 200pF between LO - GND	100	130	160	ns
Low Side Turn-On Rise Time	t <sub>rL</sub>	C <sub>L</sub> = 200pF between LO - GND	15	30	70	ns
Low Side Turn-Off Fall Time	t <sub>fL</sub>	C <sub>L</sub> = 200pF between LO - GND	20	45	90	ns
Delay Matching, High Side and Low Side Turn-On	Δt <sub>dLH</sub>	t <sub>dLH(HO)</sub> - t <sub>dLH(LO)</sub>	—	—	15	ns
Delay Matching, High Side and Low Side Turn-Off	Δt <sub>dHL</sub>	t <sub>dHL(HO)</sub> - t <sub>dHL(LO)</sub>	—	—	15	ns
Output Pulse Width	V <sub>OPW</sub>	V <sub>IN</sub> : P <sub>W</sub> = 200ns	200	220	240	ns



Powerex, Inc., 200 E. Hillis Street, Youngwood, Pennsylvania 15697-1800 (724) 925-7272

**M81707FP**  
**HVIC, High Voltage Half-Bridge Driver**  
 600 Volts/±100mA

**THERMAL DERATING FACTOR CHARACTERISTICS**

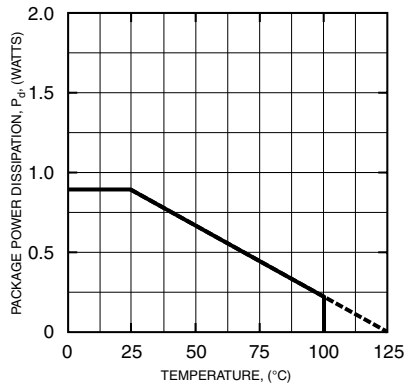

**FUNCTION TABLE (X : HORL)**


H <sub>IN</sub>	L <sub>IN</sub>	V <sub>BS</sub> U <sub>V</sub>	V <sub>CC2COM</sub> U <sub>V</sub>	HO	LO	Behavioral State
L	L	H	H	L	L	LO = HO = Low
L	H	H	H	L	H	LO = High
H	L	H	H	H	L	HO = High
H	H	H	H	H	H	LO = HO = High
X	L	L	H	L	L	HO = Low, V <sub>BS</sub> U <sub>V</sub> Tripped
X	H	L	H	L	H	LO = High, V <sub>BS</sub> U <sub>V</sub> Tripped
L	X	H	L	L	L	LO = Low, V <sub>CC2COM</sub> U <sub>V</sub> Tripped
H	X	H	L	H	L	HO = High, V <sub>CC2COM</sub> U <sub>V</sub> Tripped

NOTE: "L" state of V<sub>BS</sub> U<sub>V</sub>, V<sub>CC2COM</sub> U<sub>V</sub> means that U<sub>V</sub> trip voltage. In the case of both input signals (H<sub>IN</sub> and L<sub>IN</sub>) are "H", output signals (HO and LO) become "H".

**TIMING DIAGRAM**


**1. Input/Output Timing Diagram**

HIGH ACTIVE – When input signal (H<sub>IN</sub> or L<sub>IN</sub>) is "H", then output signal (HO or LO) is "H". In the case of both input signals (H<sub>IN</sub> and L<sub>IN</sub>) are "H", then output signals (HO and LO) become "H".

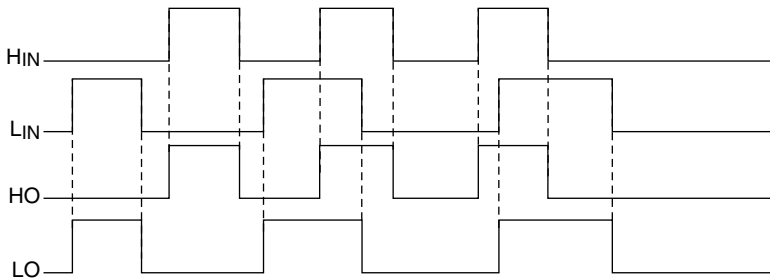

**2. V<sub>CC2COM</sub>(V<sub>BS</sub>) Supply Under Voltage Lockout Timing Diagram**

When V<sub>CC2COM</sub> supply voltage keeps lower U<sub>V</sub> trip voltage (V<sub>CC2COM</sub>U<sub>vt</sub> = V<sub>CC2COM</sub>U<sub>vr</sub> – V<sub>CC2COM</sub>U<sub>vh</sub>) for V<sub>CC2COM</sub> supply U<sub>V</sub> filter time, output signal becomes "L". And then, when V<sub>CC2COM</sub> supply voltage is higher than U<sub>V</sub> reset voltage, output signal becomes normal.

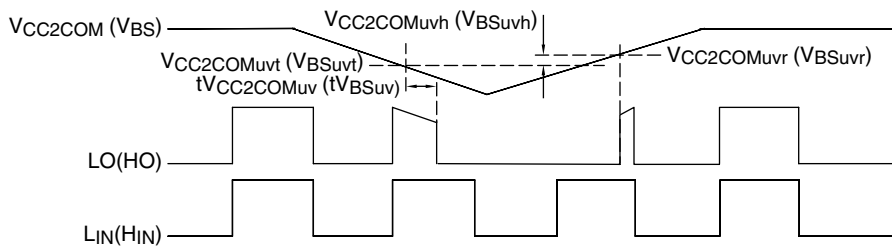

**Consideration – Allowable Supply Voltage Transient**

It is recommended supplying V<sub>CC</sub> first, V<sub>CC2COM</sub> second and V<sub>BS</sub> last. In the case of shutting off supply voltage, shut off V<sub>BS</sub> supply voltage first. Second, shut off V<sub>CC2COM</sub> supply voltage, and last, shut off V<sub>CC</sub> supply voltage.

At the time of starting V<sub>CC2COM</sub> and V<sub>BS</sub>, power supply should be increased slowly. If it is increased rapidly, output signal (HO and LO) may be "H".