



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



MAX17681A Evaluation Kit

Evaluates: MAX17681A for Isolated $\pm 7V$ or $\pm 5V$ Output Configuration

General Description

The MAX17681AEVKITB is a fully assembled and tested circuit board that demonstrates the performance of the MAX17681A high-efficiency, iso-buck DC-DC converter. The EV kit operates over a wide input-voltage range of 17V to 36V and uses primary-side feedback to regulate the output voltage. The EV kit has two output configurations. In configuration one the output is programmed to $\pm 7V@100mA$, with $\pm 8\%$ output voltage regulation. The second configuration uses a post regulator, MAX17651 to produce $\pm 5V$ at 50mA with $< \pm 3\%$ regulation.

The EV kit comes installed with the MAX17681A in a 10-pin (3mm x 2mm) TDFN package and MAX17651 in a 6-lead TSOT package.

Features

- 17V to 36V Input Voltage Range
- $\pm 7V$, 100mA or $\pm 5V$, 50mA Continuous Current
- EN/UVLO Input
- 200kHz Switching Frequency
- 87.5% Peak Efficiency
- Overcurrent Protection
- No Optocoupler
- Delivers up to 1.4W Output Power
- Overtemperature Protection
- Proven PCB Layout
- Provides robust primary and secondary output short-circuit protection

Ordering Information appears at end of data sheet.

Quick Start

Recommended Equipment

- One 15V–60V DC, 0.5A power supply
- Two resistive loads of 50mA to 100mA sink capacity
- Four digital multimeters (DMM)

Caution: Do not turn on the power supply until all connections are completed.

Procedure

The EV kit comes with the default output configuration programmed to $\pm 7V$.

Test Procedure for $\pm 7V$ Output

- 1) Verify that the J1 is open.
- 2) Verify that the R17, R18, and R19 are not installed.
- 3) Set the power supply output to 24V. Disable the power supply.
- 4) Connect the positive terminal of the power supply to the V_{IN} PCB pad and the negative terminal to the nearest PGND PCB pad. Connect a 100mA resistive load across the +7V PCB and GND0 PCB pads. Connect another 100mA resistive load across the GND0 PCB and -7VPCB pads.
- 5) Connect a DMM, configured in voltmeter mode, across the +7V PCB pad and the nearest GND0 PCB pad. Connect another DMM configured in voltmeter mode across the -7V PCB pad and the nearest GND0 PCB pad.
- 6) Enable the input power supply.
- 7) Verify that output voltages are at $\pm 7V$ (with allowable tolerance of $\pm 8\%$) with respect to GND0.
- 8) If required, vary the input voltage from 17V to 36V, the load current from 0mA to 100mA, and verify that output voltages are $\pm 7V$ (with allowable tolerance of $\pm 8\%$).

Test Procedure for $\pm 5V$ Output

- 1) Verify that J1 is open
- 2) Remove R16 and R10. Place 0Ω resistors in R18 and R19.
- 3) Set the input power supply output to 24V. Disable the power supply.
- 4) Connect the positive terminal of the power supply to the V_{IN} PCB pad and the negative terminal to the nearest PGND PCB pad. Connect a 50mA resistive load across the +5V PCB pad and the GND0 PCB pad. Connect another 50mA resistive load across the GND0 PCB pad and the -5V PCB pad.
- 5) Connect a DMM, configured in voltmeter mode, across the +5V PCB pad and the nearest GND0 PCB pad. Connect another DMM, configured in voltmeter mode, across the -5V PCB pad and the nearest GND0 PCB pad.
- 6) Enable the input power supply.
- 7) Verify that output voltages are at $\pm 5V$ (with allowable tolerance of $\pm 3\%$) with respect to GND0.
- 8) If required, vary the input voltage from 17V to 36V, the load current from 0mA to 50mA, and verify that output voltages are $\pm 5V$ (with allowable tolerance of $\pm 3\%$).

Detailed Description

The MAX17681AEVKITB EV kit is a fully assembled and tested circuit board that demonstrates the performance of the MAX17681A high-efficiency, iso-buck, DC-DC converter designed to provide an isolated power up to 1.4W. The EV kit generates either $\pm 7V$, 100mA or $\pm 5V$, 50mA output, from a 17V to 36V input supply. The EV kit features a forced PWM control scheme that provides constant switching-frequency of 200kHz operation at all load and line conditions.

The EV kit includes an EN/UVLO PCB pad to monitor and program the EN/UVLO pin of the MAX17681A. The V_{PRI} PCB pad helps measure the regulated primary output voltage (V_{PRI}). An additional \overline{RESET} PCB pad is available for monitoring the health of primary output voltage (V_{PRI}). \overline{RESET} is pulled low if the FB voltage drops below 92.5% of its set value. \overline{RESET} goes high 1024 clock cycles after the FB voltage rises above 95.5% of its set value. The programmable soft-start feature allows users to reduce the input inrush current.

The iso-buck is a synchronous-buck-converter-based topology, useful for generating isolated outputs at low power level without using an optocoupler. The detailed procedure for setting the soft-start time, ENABLE/UVLO divider, primary output voltage (V_{PRI}) selection, adjusting the primary output voltage, primary inductance selection, turns-ratio selection, output capacitor selection, output diode selection and external loop compensation are given in the MAX17681 IC data sheet. The post regulator, MAX17651 output voltage setting and the related additional information are detailed in MAX17651 IC data sheet.

Enable Control (J1)

The EN/UVLO pin on the device serves as an on/off control while also allowing the user to program the input undervoltage-lockout (UVLO) threshold. Jumper J1 configures the EV kit's output for turn-on/turn-off control. Install a shunt across J1 pins 2-3 to disable V_{OUT} . See [Table 1](#) for proper J1 configurations.

Table 1. Enable Control (EN/UVLO) (J1) Jumper Settings






| SHUNT POSITION | EN/UVLO PIN | V_{OUT} OUTPUT |
|----------------|--|--------------------------------|
| J1 | | |
| 1-2 | Connected to VIN | Always Enabled |
| 2-3 | Connected to GND | Always Disabled |
| Open* | Connected to midpoint of R1, R2 resistor-divider | Enabled at $V_{IN} \geq 15.5V$ |

*Default position.


NOTE 1: The secondary output diodes D1, D2 are rated to carry short-circuit current only for a few hundredths of a millisecond and are not rated to carry the continuous short-circuit current.

NOTE 2: The iso-buck converter typically needs 10% minimum load to regulate the output voltage. In this design, when both +7V and -7V rails are healthy, the U4 sinks the minimum load current required to regulate the output voltages within $\pm 8\%$ regulation. When a short is applied on any one of the output rails with no-load on other healthy rail, the healthy rail voltage can be as high as 16V.

EV Kit Performance Report

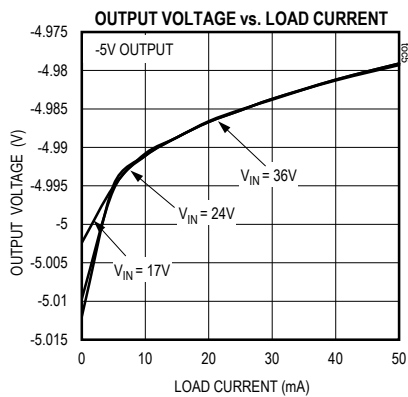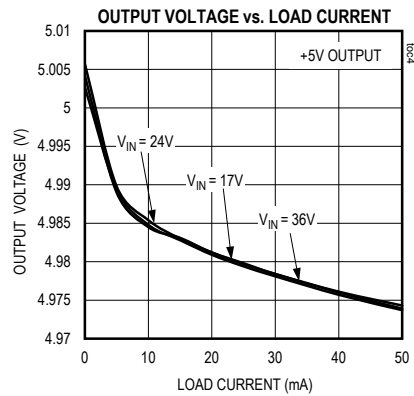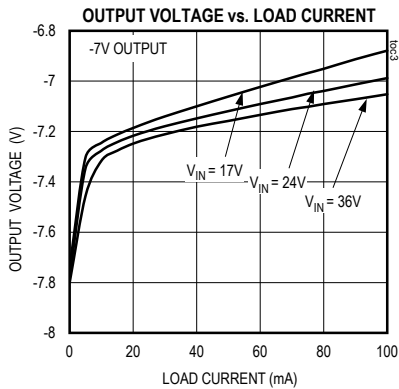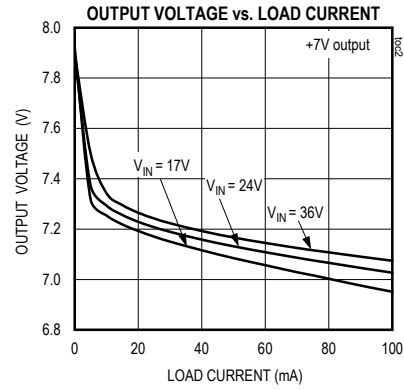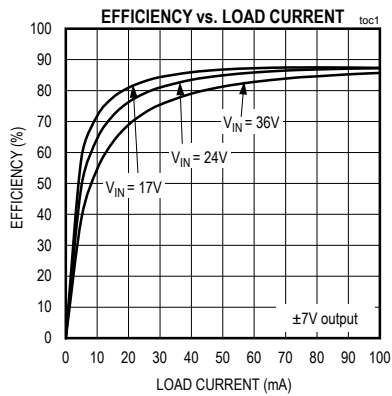

LOAD TRANSIENT RESPONSE (LOAD CURRENT FROM 50mA TO 100mA ON +7V, -7V LOADED WITH 100mA)

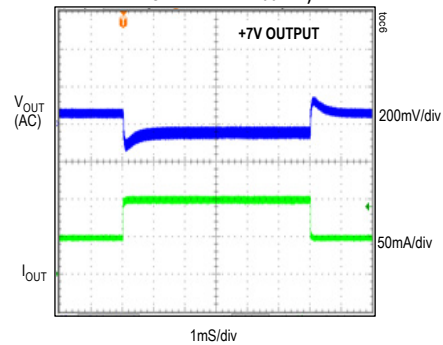

MAX17681A Evaluation Kit

Evaluates: MAX17681A for Isolated $\pm 7V$ or $\pm 5V$ Output Configuration

Component Suppliers

| SUPPLIER | WEBSITE |
|------------------|-------------------|
| Würth Elektronik | www.we-online.com |
| Murata Americas | www.murata.com |
| Panasonic Corp. | www.panasonic.com |

Note: Indicate that you are using the MAX17681A when contacting these component suppliers.

Ordering Information

| PART | TYPE |
|------------------|--------|
| MAX17681AEVKITB# | EV Kit |

#Denotes RoHS compliant.


MAX17681A EV Bill of Materials

| S NO | Designation | Qty | Description | Manufacturer Partnumber-1 | Manufacturer Partnumber-2 | Manufacturer Partnumber-3 | Manufacturer Partnumber-4 |
|------|-------------|-----|--|------------------------------------|------------------------------|---------------------------|---------------------------|
| 1 | C1 | 1 | 1 μ F \pm 10%, 50V, X7R Ceramic capacitor (1206) | Murata GRM31CR71H105KA61 | KEMET C1206C105K5RAC | Murata GRM31MR71H105KA88 | |
| 2 | C2 | 1 | 1 μ F \pm 10% 16V X7R Ceramic capacitor (0603) | Murata GRM188R71C105KA12 | KEMET C0603C105K4RAC | TDK C1608X7R1C105K | TAIYO YUDEN EMK107B7105KA |
| 3 | C3 | 1 | 33nF \pm 10%, 25V, X7R ceramic capacitor (0402) | Murata GRM155R71E333KA88 | | | |
| 4 | C4 | 1 | 0.082 μ F \pm 10%, 16V, X7R ceramic capacitor (0402) | Murata C0402C823K4RAC | KEMET C0402C823K4RAC | | |
| 5 | C5 | 1 | 820pF \pm 5%, 50V, COG ceramic capacitor (0402) | Murata GRM1555C1H821J | KEMET C0402C821J5GAC | | |
| 6 | C6 | 1 | 10 μ F \pm 10%, 16V, X7R ceramic capacitor (1206) | Murata GRM31CR71C106KAC7 | | | |
| 7 | C7, C8 | 2 | 4.7 μ F \pm 10%, 50V, X7R ceramic capacitor (1206) | Murata GRM31CR71H475KA12 | | | |
| 8 | C9, C10 | 2 | 2.2 μ F \pm 10%, 50V, X7R ceramic capacitor (1206) | Murata GRM31CR71H225KA88 | TAIYO YUDEN UMK316B7225K | | |
| 9 | C11 | 1 | 1000PF \pm 10%, 1500V, X7R ceramic capacitor (1206) | AVX 1206SC102KAT | | | |
| 10 | C12, C13 | 2 | 0.1 μ F \pm 10%, 25V, X7R ceramic capacitor (0402) | Murata GRM155R71E104KE14 | | | |
| 11 | C14 | 1 | 0.01 μ F \pm 10%, 50V, X7R ceramic capacitor (0402) | Murata GRM155R71H103KA88 | KEMET C0402C103K5RAC | | |
| 12 | C15 | 1 | 22 μ F, 20%, 50V, ALUMINUM ELECTROLYTIC CAPACITOR 6.60*6.60mm, | Panasonic EEEFK1H220P | | | |
| 13 | D1, D2 | 2 | 100V/1A, PowerDi [®] 123 | Diode Inc. DF1S1100-7 | | | |
| 14 | J1 | 1 | 3-pin headers | SULLINS ELECTRONICS CORP PEC03SAAN | | | |
| 15 | R1 | 1 | 3.01M Ohm \pm 1% resistor (0402) | VISHAY DALE CRCW04023M01FK | | | |
| 16 | R2 | 1 | 261K Ohm \pm 1% resistor (0402) | VISHAY DALE CRCW0402261KFK | | | |
| 17 | R3 | 1 | 78.7K Ohm \pm 1% resistor (0402) | VISHAY DALE CRCW040278K7FK | | | |
| 18 | R4 | 1 | 10.5k Ω \pm 1% resistor (0402) | PANASONIC ERJ-2RFK1052 | | | |
| 19 | R5 | 1 | 4.02k Ω \pm 1% resistor (0402) | VISHAY DALE CRCW04024K02FK | PANASONIC ERJ-2RFK4021X | | |
| 20 | R6 | 1 | 100k Ω \pm 5% resistor (0402) | PANASONIC ERJ-2GEJ104X | | | |
| 21 | R7, R9 | 2 | 22k Ω \pm 1% resistor (0402) | VISHAY DALE CRCW040222K0FK | | | |
| 22 | R8 | 1 | 115k Ω \pm 1% resistor (0402) | VISHAY DALE CRCW0402115KFK | | | |
| 23 | R10 | 1 | 22 Ω \pm 1% resistor (0402) | VISHAY DALE CRCW040222R0FK | | | |
| 24 | R11 | 1 | 604k Ω \pm 1% resistor (0402) | PANASONIC ERJ-2RFK6043X | | | |
| 25 | R12, R14 | 2 | 432k Ω \pm 1% resistor (0402) | VISHAY DALE CRCW0402432KFK | | | |
| 26 | R13, R15 | 2 | 59k Ω \pm 1% resistor (0402) | VISHAY DALE CRCW040259K0FK | VENKEL LTD CR0402-16W-5902FT | | |
| 27 | R16 | 1 | 0 Ω \pm 5% resistor (0805) | YAGEO PHYCOMP RC0805JR-070RL | | | |
| 28 | R17 | 1 | OPEN (0402) | | | | |
| 29 | R18, R19 | 2 | OPEN (0402) | | | | |
| 30 | T1 | 1 | EP7, 8-pin SMT, 50 μ H, 1.2A, (1-4):(5-6):(7-8) = 1:1 | WURTH ELECTRONICS INC. 750342779 | SUMIDA CEP810-10348-T049 | | |
| 31 | U1 | 1 | MAX17681A TDFN10 3*2mm Iso buck DC-DC converter | MAX17681AATB+ | | | |
| 32 | U2, U3 | 1 | MAX17651 TSOT LDO | MAX17651AZT+ | | | |
| 33 | U4 | 1 | Shunt regulator SOT25 | Diode Inc. TL431BW5 | | | |


MAX17681A Evaluation Kit

Evaluates: MAX17681A for Isolated $\pm 7V$ or $\pm 5V$ Output Configuration


MAX17681A EV System PCB Layout Diagrams

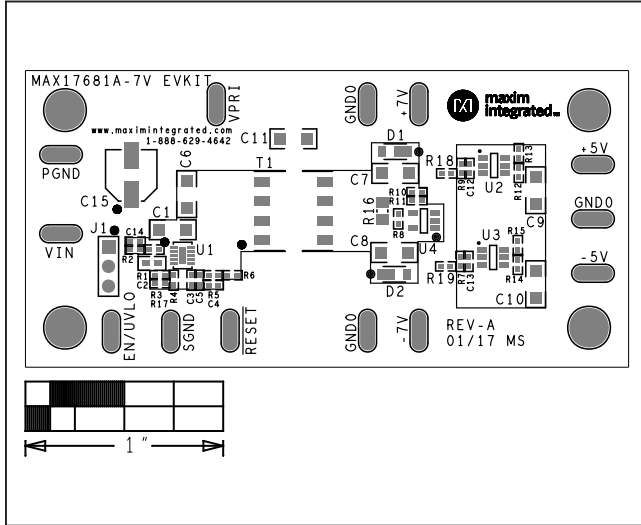

MAX17681A EV Kit—Top Silkscreen

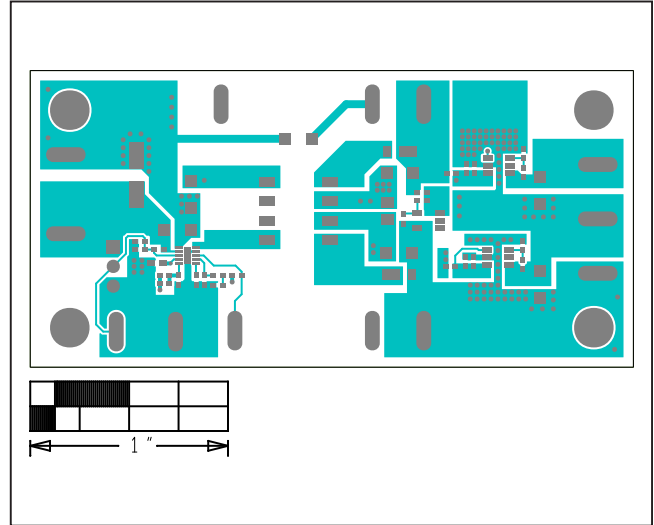

MAX17681A EV Kit—Top

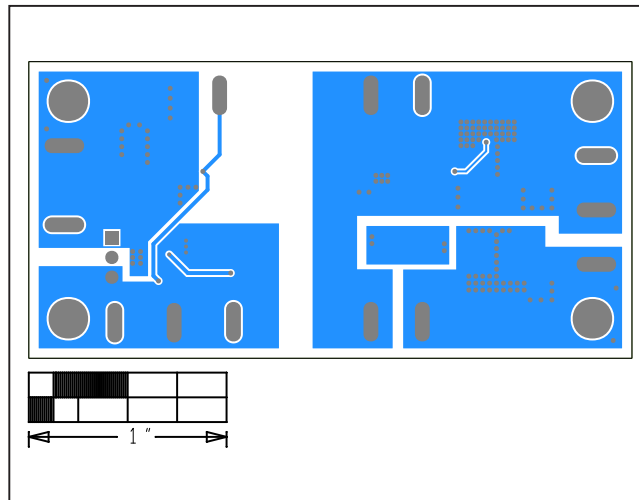


MAX17681A EV Kit—Bottom

MAX17681A Evaluation Kit

Evaluates: MAX17681A for Isolated $\pm 7V$ or $\pm 5V$ Output Configuration

MAX17681A EV System Schematic

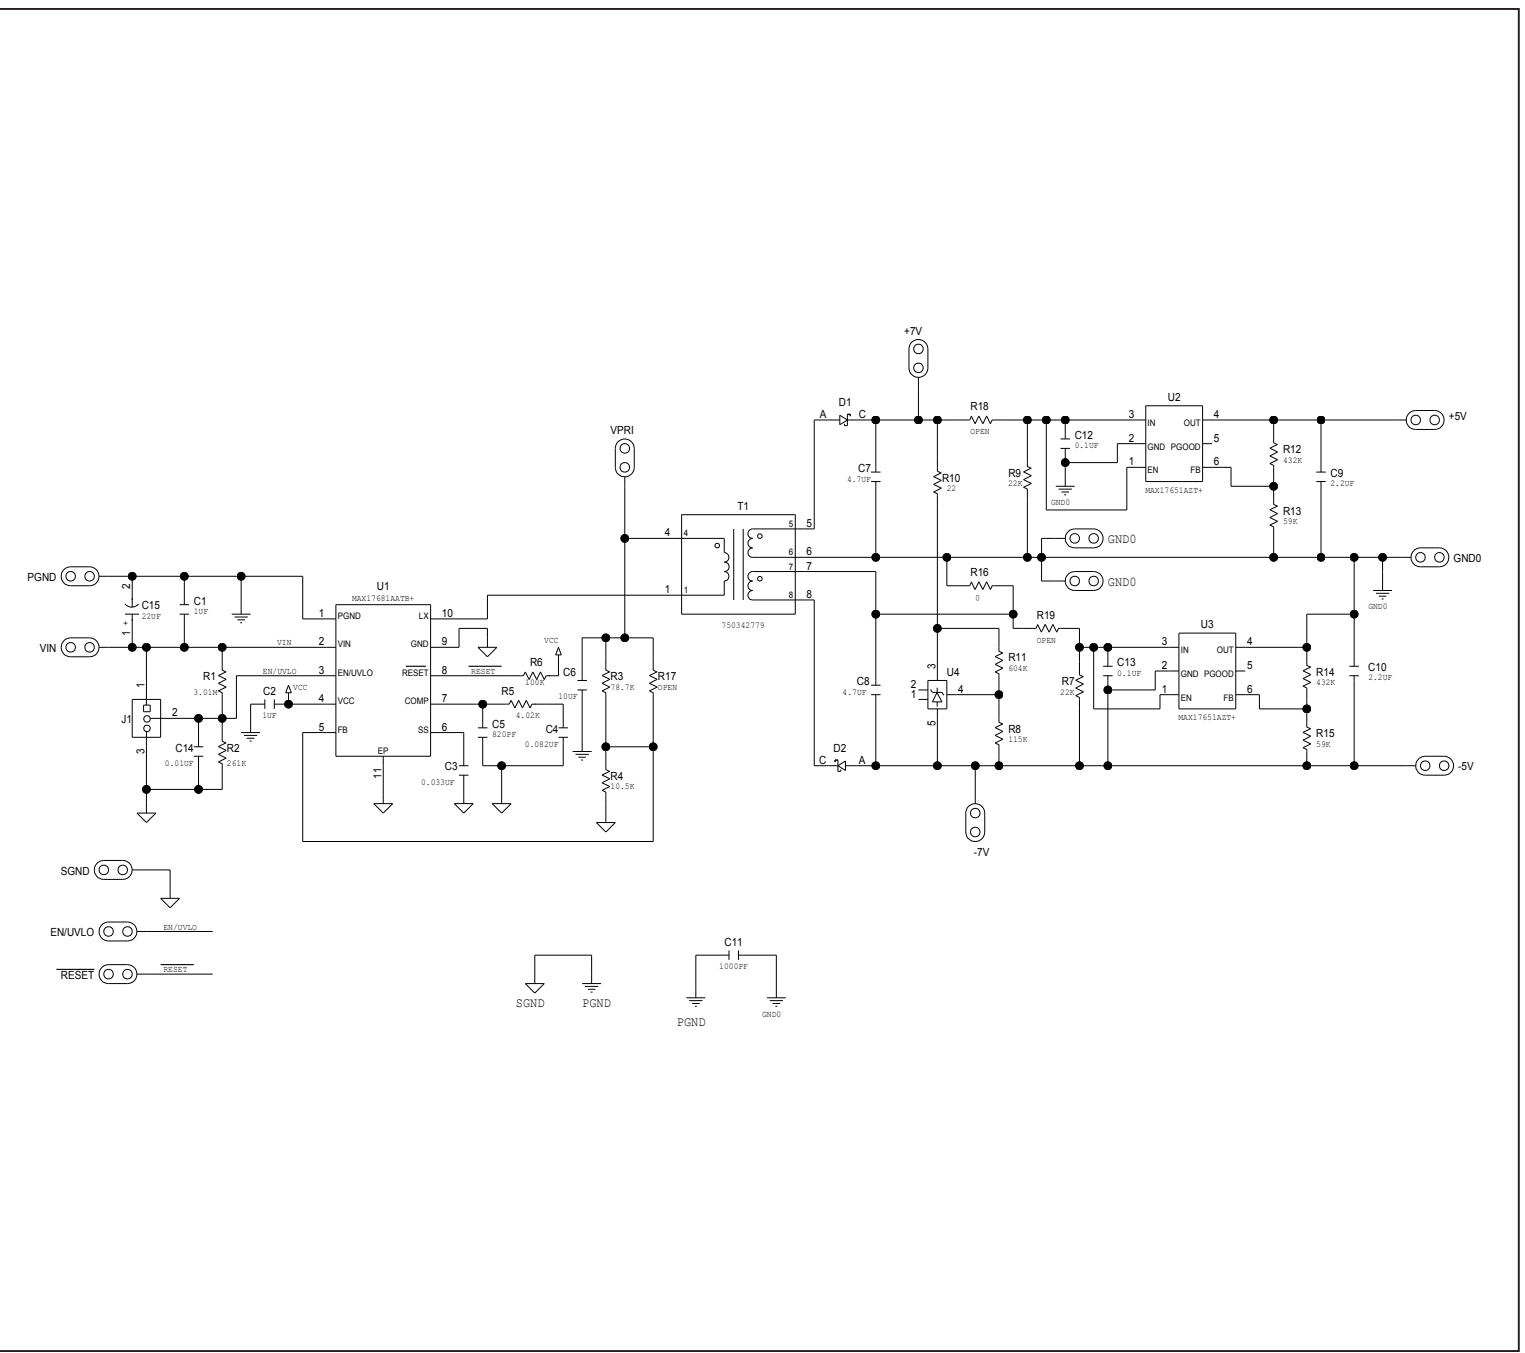

Revision History

| REVISION NUMBER | REVISION DATE | DESCRIPTION | PAGES CHANGED |
|-----------------|---------------|-----------------|---------------|
| 0 | 3/17 | Initial release | — |

For pricing, delivery, and ordering information, please contact Maxim Direct at 1-888-629-4642, or visit Maxim Integrated's website at www.maximintegrated.com.

Maxim Integrated cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim Integrated product. No circuit patent licenses are implied. Maxim Integrated reserves the right to change the circuitry and specifications without notice at any time.