



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



MAX40088 Evaluation Kit

Evaluates: MAX40075/MAX40088/
MAX40079/MAX40087

General Description

The MAX40088 evaluation kit (EV kit) is a fully assembled and tested circuit board that contains all the components necessary to evaluate the MAX40075/MAX40088/MAX40079/MAX40087 ICs. The MAX40088 EV kit printed circuit board (PCB) comes installed with MAX40088AUT+ in 6-SOT23 package.

The device is a rail-to-rail output op amp offering 10MHz Gain Bandwidth product (MAX40075/MAX40079) and 42MHz Gain Bandwidth product (MAX40088/MAX40087). The EV kit operates from a single 2.7V to 5.5V DC power supply or from $\pm 1.35V$ to $\pm 2.75V$ split supply.

Features

- +2.7V to +5.5V Supply Voltage Range across V_{DD} and V_{SS}
- 42MHz Gain Bandwidth Product (MAX40088/MAX40087), Gain = 5V/V Stable
- 10MHz Gain Bandwidth Product (MAX40075/MAX40079), Gain = 1V/V Stable
- Ultra-Low Distortion (0.0002% with 1k Ω load)
- Proven PCB Layout
- Fully Assembled and Tested

Ordering Information appears at end of data sheet.

Quick Start

Required Equipment

Before beginning, the following equipment is needed:

- MAX40088 EV kit
- 2.7V to 5.5V, 100mA DC power supply
- Precision voltage calibrator
- Digital multimeter

Procedure

The EV kit is fully assembled and tested. Follow the steps below to verify board operation.

Caution: Do not turn on power supplies until all connections are completed and turn on V_{DD} , V_{SS} supplies before turning on voltage calibrator on the input pins.

- 1) Make sure JU1 jumper is uninstalled and JU2 jumper is in 1-2 position before applying supply voltage.
- 2) Connect positive terminal of the +5V supply to the VDD test point and the GND terminal of supply to the GND test point. Make sure JU3 is in 1-2 position and JU4 is un-installed. JU4 is opened if split supply operation is desired.
- 3) Connect the positive terminal of the precision voltage calibrator to the INP/TP3 test point.
- 4) Connect the DMM to monitor the voltage on the OUTA/TP11 test point.
- 5) Turn on the 5V power supply connected to VDD test point, turn on the precision voltage calibrator on INP/TP3 test point and set 0.1V. Observe the output at the OUTA/TP11 test point on the DMM. DMM should read approximately 1V. Also, vary IN+ voltage between 0V to 0.45V and see if DMM on OUTA test point is showing a gain of 10V/V to the voltage applied on INP test point. Once above step is confirmed, EV kit is tested for functionality.

Detailed Description of Hardware

The MAX40088 EV kit contains the MAX40088 IC, which is rail-to-rail output op amps with low noise and wide bandwidth in 6-SOT23 package. The EV kit operates from a single 2.7V to 5.5V DC power supply. The EV kit is meant to work using split supplies as well where the voltage between V_{DD} and V_{SS} is +2.7V to +5.5V.

Default Application Circuit

The EV kit comes preconfigured in a Non-Inverting amplifier configuration with Gain set as 10V/V.

Op Amp Configurations

The EV kit provides flexibility to easily reconfigure the op amp into any of the three common circuit topologies: inverting amplifier, non-inverting amplifier and Differential amplifier.

These configurations are described in the next few sections.

Noninverting Configuration

The MAX40088 EV kit comes preconfigured as a non-inverting amplifier. The gain is set by the ratio of R8 and R9. The MAX40088 EV kit comes preconfigured for a gain of 10. The output voltage for the non-inverting configuration is given by the equation below:

$$V_{OUTA} = \left(1 + \frac{R8}{R9}\right) V_{INP}$$

Inverting Configuration

To configure the EV kit as an inverting amplifier, remove the shunt 1-2 on JU2 and install a shunt on jumper JU1 on position 1-2 and feed an input signal on the INM pad.

$$V_{OUTA} = -\left(\frac{R8}{R9}\right) V_{INM}$$

Differential Amplifier

To configure the MAX40088 EV kit as a differential amplifier, replace R2, R3, R8, and R9 with appropriate resistors. When $R2 = R8$ and $R3 = R9$, the CMRR of the differential amplifier is determined by the matching of the resistor ratios $R2/R3$ and $R8/R9$.

$$V_{OUTA} = GAIN(V_{INP} - V_{INM})$$

where

$$GAIN = \frac{R8}{R9} = \frac{R2}{R3}$$

Transimpedance Amplifier

To configure the MAX40088 EV kit as a transimpedance amplifier (TIA), short jumper JU1 on 1-2, replace R3, R9 with a 0 ohm resistor and populate R8 pad with 100kΩ resistor. The output voltage of the TIA is the input current multiplied by the feedback resistor:

$$V_{OUT} = (I_{INM} + I_{BIAS-}) \times R8 + V_{OS}$$

where I_{INM} is the input current source applied at the INM test point, I_{BIAS-} is the input bias current into IN- pin, and V_{OS} is the input offset voltage of the op amp. Use capacitor C2 to stabilize the op amp by rolling off high-frequency gain due to a large cable capacitance if desired.

Capacitive Loads

Some applications require driving large capacitive loads. To improve stability of the amplifier in such cases, replace R11 with a suitable resistor value to improve amplifier phase margin.

Table 1. Default Jumper Settings

| JUMPER | SHUNT POSITION | DESCRIPTION |
|--------|----------------|---------------------------------|
| JU1 | 1-2 | IN+ to GND |
| | 2-3 | IN+ terminated by 50Ω to GND |
| | Not Installed* | IN+ terminal floating |
| JU2 | 1-2* | IN- to GND |
| | 2-3 | IN- terminated by 50Ω to GND |
| | Not Installed | IN- terminal floating |
| JU3 | 1-2* | Device in active or normal mode |
| | 2-3 | Device in Shutdown mode |
| JU4 | Installed* | Single-supply operation |
| | Not Installed | Split-supply operation |

*Default position.

MAX40088 Evaluation Kit

Evaluates: MAX40075/MAX40088/
MAX40079/MAX40087

Component Suppliers

| SUPPLIER | WEBSITE |
|--------------------|--|
| Murata Electronics | www.murata-northamerica.com |

Note: Indicate that you are using the MAX40088 EV kit when contacting these component suppliers.

Ordering Information

| PART | TYPE |
|----------------|--------|
| MAX40088EVKIT# | EV Kit |

#RoHS compliant.


MAX40088 Evaluation Kit

Evaluates: MAX40075/MAX40088/
MAX40079/MAX40087


MAX40088 EV Kit Bill of Materials

| ITEM | QTY | REF DES | Var Status | MAXINV | MFG PART # | MFG | VALUE | DESCRIPTION |
|---|-----|------------------------|------------|-----------------------------|---|----------------------------------|-------------------|--|
| 1 | 2 | C4, C6 | Pref | 20-000U1-P6B | C1608X7R1E104K08 0AA | TDK | 0.1UF | CAPACITOR; SMT (0603); CERAMIC CHIP; 0.1UF; 25V; TOL=10%; MODEL=C SERIES; TG=-55 DEGC TO +125 DEGC; TC=X7R |
| 2 | 2 | C5, C7 | Pref | 20-004U7-L3 | C1608X5R1E475K08 0AC; GRM188R61E475KE 11 | TDK; MURATA | 4.7UF | CAPACITOR; SMT (0603); CERAMIC CHIP; 4.7UF; 25V; TOL=10%; TG=- 55 DEGC TO +85 DEGC; TC=X5R |
| 3 | 2 | GND, GND1 | Pref | 02-TPMINI5011-00 | 5011 | KEYSTONE | N/A | TEST POINT; PIN DIA=0.125IN; TOTAL LENGTH=0.445IN; BOARD HOLE=0.063IN; BLACK; PHOSPHOR BRONZE WIRE SILVER PLATE FINISH; RECOMMENDED FOR BOARD THICKNESS=0.062IN; NOT FOR COLD TEST |
| 4 | 3 | INM, INP, OUTA | Pref | 01- 31532952RFX5P- 21 | 31-5329-52RFX | AMPHENOL | 31-5329- 52RFX | CONNECTOR; FEMALE; THROUGH HOLE; BNC 500HM PCB RECEPTACLE; STRAIGHT; 5PINS |
| 5 | 3 | JU1-JU3 | Pref | 01-PEC03SAAN3P 21 | PEC03SAAN | SULLINS | PEC03SAA N | CONNECTOR; MALE; THROUGH HOLE; BREAKAWAY; STRAIGHT; 3PINS |
| 6 | 1 | JU4 | Pref | 01-PEC02SAAN2P 21 | PEC02SAAN | SULLINS | PEC02SAA N | CONNECTOR; MALE; THROUGH HOLE; BREAKAWAY; STRAIGHT; 2PINS |
| 7 | 4 | R1, R5, R7, R11 | Pref | 80-0000R-AA6 | CRCW06030000Z0 | VISHAY DALE | 0 | RESISTOR; 0603; 0 OHM; 0%; JUMPER; 0.1W; THICK FILM |
| 8 | 1 | R3 | Pref | 80-0180R-24 | CRCW0603180RFK | VISHAY DALE | 180 | RESISTOR, 0603, 180 OHM, 1%, 100PPM, 0.10W, THICK FILM |
| 9 | 2 | R6, R10 | Pref | 80-0050R-H9 | RG1608N-500-W | SUSUMU CO LTD. | 50 | RESISTOR; 0603; 50 OHM; 0.05%; 10PPM; 0.10W; THIN FILM |
| 10 | 1 | R8 | Pref | 80-001K8-24 | CRCW06031K80FK | VISHAY DALE | 1.8K | RESISTOR, 0603, 1.8K OHM, 1%, 100PPM, 0.10W, THICK FILM |
| 11 | 1 | R9 | Pref | 80-0200R-24 | CRCW06032000FK | VISHAY DALE | 200 | RESISTOR; 0603; 200 OHM; 1%; 100PPM; 0.10W; THICK FILM |
| 12 | 4 | SU1-SU4 | Pref | 02- JMPFSTC02SYAN- 00 | STC02SYAN | SULLINS ELECTRONI CS CORP. | STC02SYA N | TEST POINT; JUMPER; STR; TOTAL LENGTH=0.256IN; BLACK; INSULATION=PBT CONTACT=PHOSPHOR BRONZE; COPPER PLATED TIN OVERALL |
| 13 | 4 | TP1, TP2, TP4, TP5 | Pref | 02-TPMINI5001-00 | 5001 | KEYSTONE | N/A | TEST POINT; PIN DIA=0.1IN; TOTAL LENGTH=0.3IN; BOARD HOLE=0.04IN; BLACK; PHOSPHOR BRONZE WIRE SILVER PLATE FINISH; RECOMMENDED FOR BOARD THICKNESS=0.062IN; NOT FOR COLD TEST |
| 14 | 4 | TP3, TP6, TP7, TP11 | Pref | 02-TPMINI5012-00 | 5012 | KEYSTONE | N/A | TEST POINT; PIN DIA=0.125IN; TOTAL LENGTH=0.445IN; BOARD HOLE=0.063IN; WHITE; PHOSPHOR BRONZE WIRE SILVER PLATE FINISH; RECOMMENDED FOR BOARD THICKNESS=0.062IN; NOT FOR COLD TEST |
| 15 | 1 | U1 | Pref | 00-SAMPLE-01 | MAX40088AUT+ | MAXIM | MAX40088 AUT+ | EVKIT PART-IC; OPAMP; OZ46; SINGLE 10MHZ; LOW NOISE LOW BIAS CURRENT OP-AMP; PKG. OUTLINE DWG.: 21-0058; SOT23-6 |
| 16 | 1 | VDD | Pref | 02-TPMINI5010-00 | 5010 | KEYSTONE | N/A | TESTPOINT WITH 1.80MM HOLE DIA; RED; MULTIPURPOSE; NOT FOR COLD TEST |
| 17 | 1 | VSS | Pref | 02-TPMINI5013-00 | 5013 | KEYSTONE | N/A | TEST POINT; PIN DIA=0.125IN; TOTAL LENGTH=0.445IN; BOARD HOLE=0.063IN; ORANGE; PHOSPHOR BRONZE WIRE SILVER PLATE FINISH; RECOMMENDED FOR BOARD THICKNESS=0.062IN; NOT FOR COLD TEST |
| 18 | 1 | PCB | - | EPCB4007540088 | MAX40088EVKIT# | MAXIM | PCB | PCB:MAX4007540088 |
| TOTAL | 38 | | | | | | | |
| DO NOT PURCHASE(DNP) | | | | | | | | |
| ITEM | QTY | REF DES | Var Status | MAXINV | MFG PART # | MFG | VALUE | DESCRIPTION |
| 1 | 3 | C1-C3 | DNP | N/A | N/A | N/A | OPEN | PACKAGE OUTLINE 0603 NON-POLAR CAPACITOR - EVKIT |
| 2 | 3 | R2, R4, R12 | DNP | N/A | N/A | N/A | OPEN | PACKAGE OUTLINE 0603 RESISTOR - EVKIT |
| TOTAL | 6 | | | | | | | |
| PACKOUT (These are purchased parts but not assembled on PCB and will be shipped with PCB) | | | | | | | | |
| ITEM | QTY | REF DES | Var Status | MAXINV | MFG PART # | MFG | VALUE | DESCRIPTION |
| 1 | 1 | PACKOUT_BOX | DNI | 88-00712-MDM | 88-00712-MDM | N/A | ? | BOX;+;MEDIUM BROWN 9 3/8" X 7 1/4" X 2 1/2 |
| 2 | 1 | PACKOUT_BOX | DNI | 87-02159-000 | 87-02159-000 | N/A | ? | ESD BAG;+;BAG; STATIC SHIELD 5X8;W/ESD LOGO |
| 3 | 1 | PACKOUT_BOX | DNI | 85-MAXKIT-PNK | 85-MAXKIT-PNK | N/A | ? | PINK FOAM;FOAM;ANTI-STATIC PE 12inX12inX5MM - PACKOUT |
| 4 | 1 | PACKOUT_BOX | DNI | EVINSERT | EVINSERT | N/A | ? | WEB INSTRUCTIONS FOR MAXIM DATA SHEET |
| 5 | 1 | PACKOUT_BOX | DNI | 85-84003-006 | 85-84003-006 | N/A | ? | LABEL(EV KIT BOX) - PACKOUT |
| TOTAL | 5 | | | | | | | |


MAX40088 EV Kit Schematic

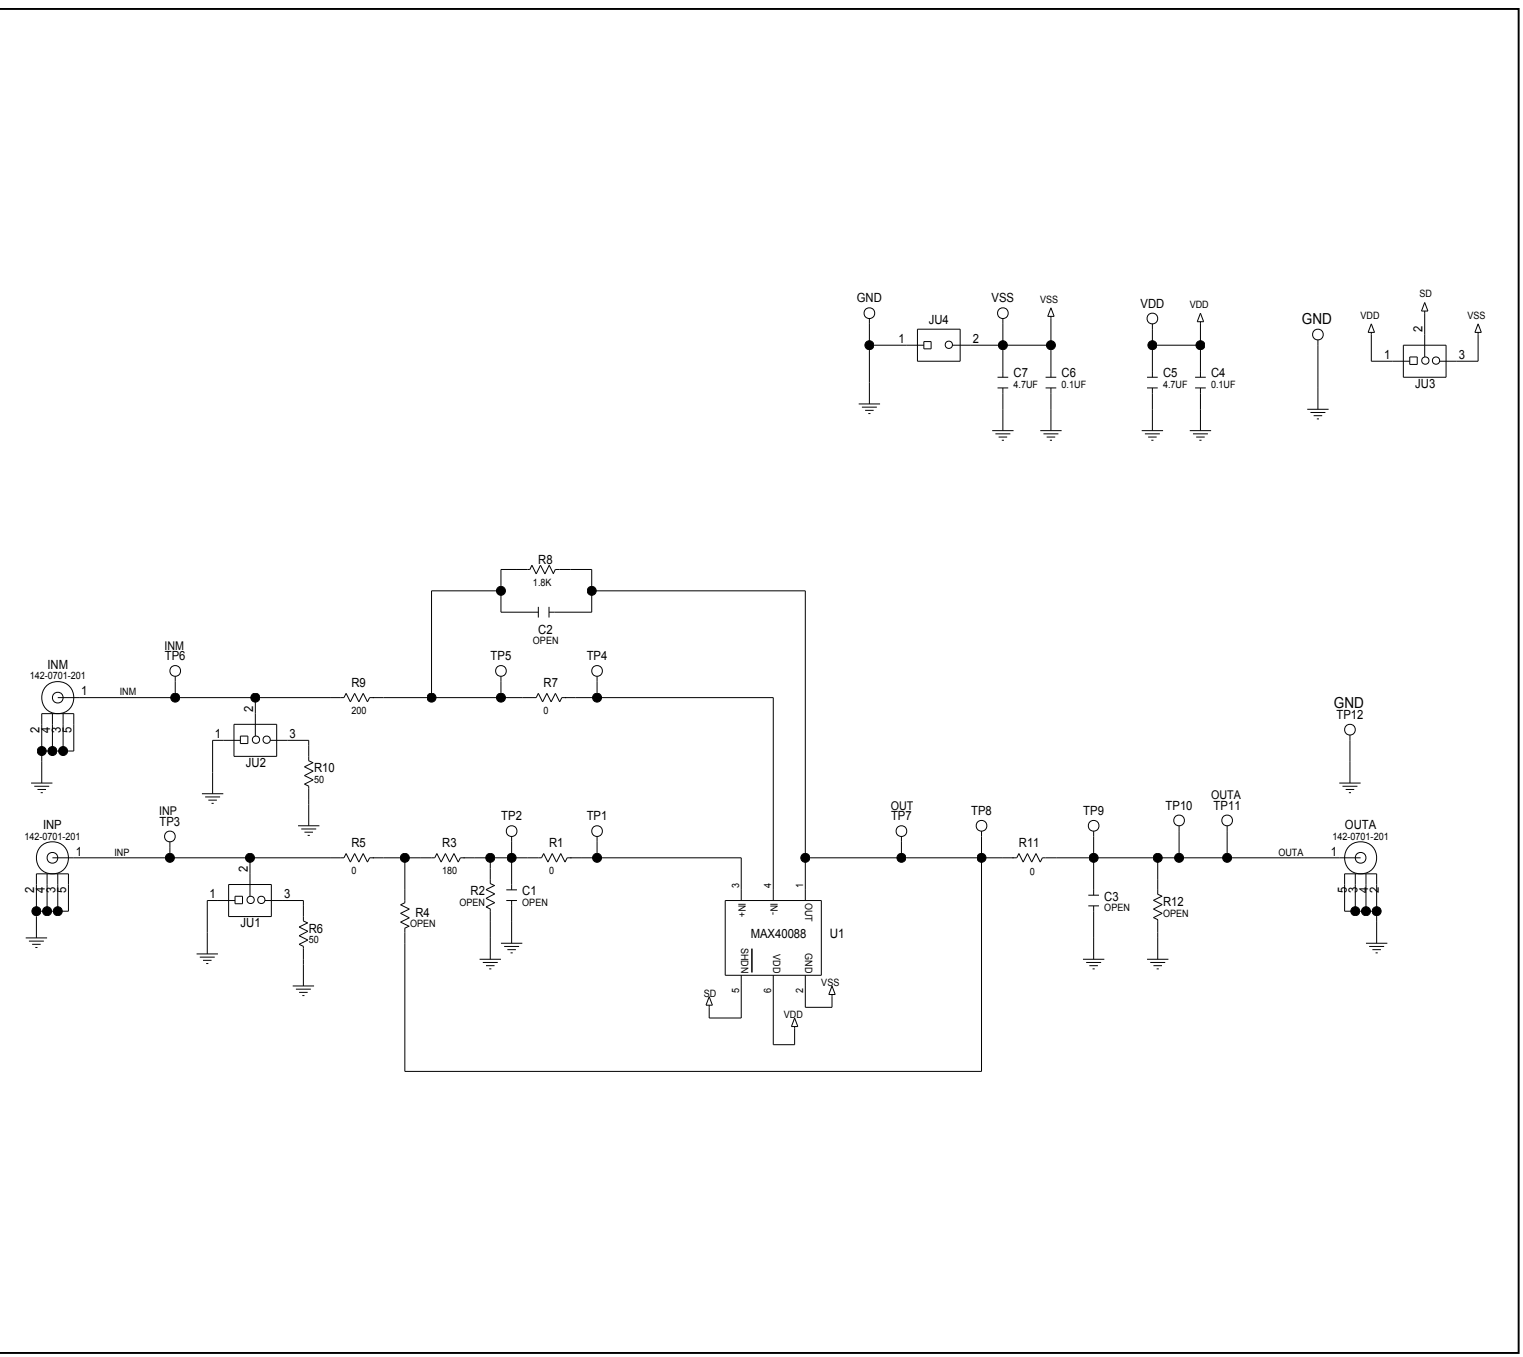


MAX40088 EV Kit PCB Layout Diagrams

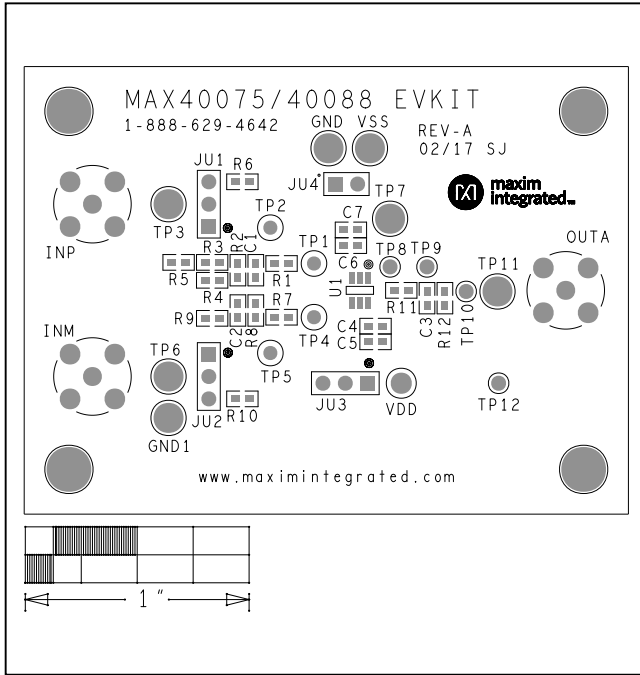

MAX40088 EV Kit—Top Silkscreen

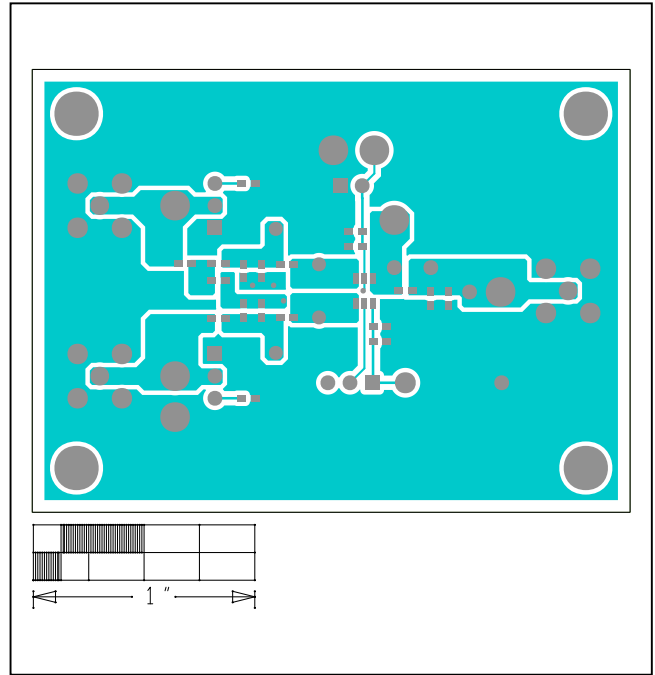

MAX40088 EV Kit—Top

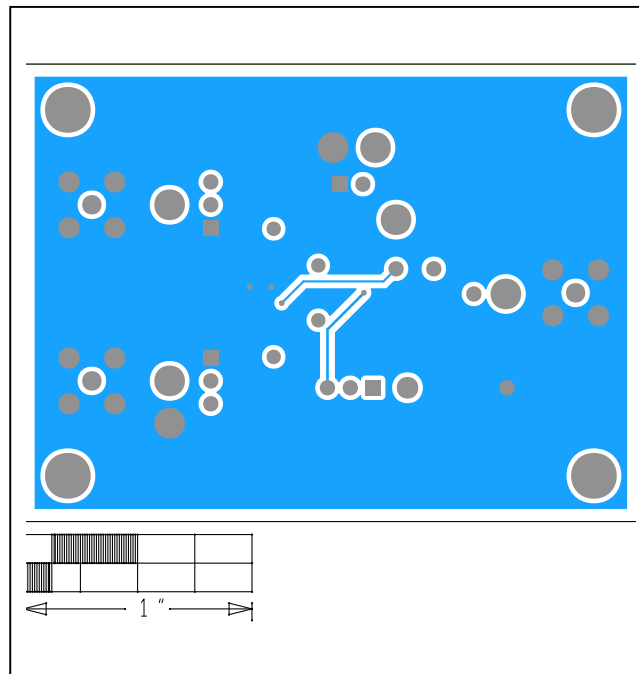

MAX40088 EV Kit—Bottom

Revision History

| REVISION NUMBER | REVISION DATE | DESCRIPTION | PAGES CHANGED |
|-----------------|---------------|---|---------------|
| 0 | 8/17 | Initial release | — |
| 1 | 12/17 | Added MAX40079 and MAX40087 to parts able to be evaluated, <i>General Description</i> and <i>Features</i> sections, and updated schematic | 1–7 |

For pricing, delivery, and ordering information, please contact Maxim Direct at 1-888-629-4642, or visit Maxim Integrated's website at www.maximintegrated.com.

Maxim Integrated cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim Integrated product. No circuit patent licenses are implied. Maxim Integrated reserves the right to change the circuitry and specifications without notice at any time.