



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





825MHz to 915MHz, SiGe High-Linearity Active Mixer

MAX9982

General Description

The MAX9982 fully integrated SiGe mixer is optimized to meet the demanding requirements of GSM850, GSM900, and CDMA850 base-station receivers. Each high-linearity device includes a local oscillator (LO) switch, LO driver, and active mixer. On-chip baluns are also integrated to allow for single-ended RF and LO inputs. Since the active mixer provides 2dB of conversion gain, the device effectively replaces the IF amplifier stage, which typically follows most passive mixer implementations.

The MAX9982 provides exceptional linearity with an input IP3 of greater than +26dBm. The integrated LO driver allows for a wide range of LO drive levels from -5dBm to +5dBm. In addition, the built-in switch enables rapid LO selection of less than 250ns, as needed for GSM frequency-hopping applications.

The MAX9982 is available in a 20-pin QFN package (5mm x 5mm) with an exposed paddle and is specified over the -40°C to +85°C extended temperature range.

Applications

- GSM850/GSM900 2G and 2.5G EDGE Base Station Receivers
- Cellular cdmaOne™ and cdma2000™ Base Station Receivers
- TDMA and Integrated Digital Enhanced Network (iDEN)™ Base Station Receivers
- Digital and Spread-Spectrum Communication Systems
- Microwave Links

Typical Application Circuit appears at end of data sheet.

*cdmaOne is a trademark of CDMA Development Group.
cdma2000 is a trademark of Telecommunications Industry Association.
iDEN is a trademark of Motorola, Inc.*

Features


- ◆ +26.8dBm Input IP3
- ◆ +13dBm Input 1dB Compression Point
- ◆ 825MHz to 915MHz RF Frequency Range
- ◆ 70MHz to 170MHz IF Frequency Range
- ◆ 725MHz to 1085MHz LO Frequency Range
- ◆ 2dB Conversion Gain
- ◆ 12dB Noise Figure
- ◆ -5dBm to +5dBm LO Drive
- ◆ 5V Single-Supply Operation
- ◆ Built-In LO Switch
- ◆ ESD Protection
- ◆ Internal RF and LO Baluns for Single-Ended Inputs

Ordering Information

| PART | TEMP RANGE | PIN-PACKAGE |
|------------|----------------|------------------------|
| MAX9982ETP | -40°C to +85°C | 20 QFN-EP* (5mm x 5mm) |

*EP = exposed paddle.

Pin Configuration/ Functional Diagram

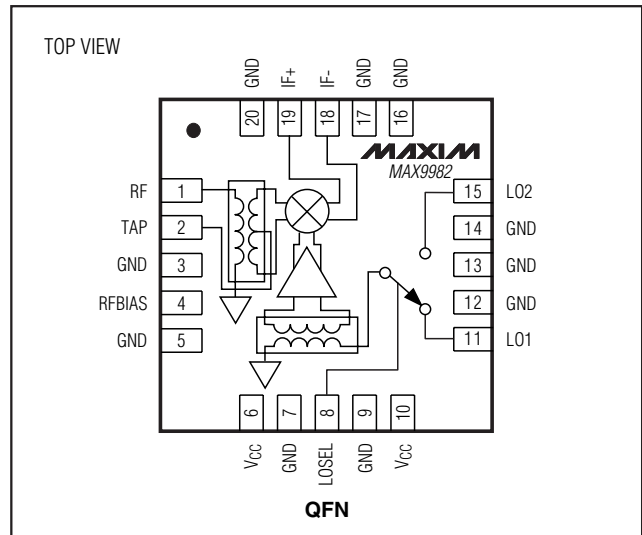

825MHz to 915MHz, SiGe High-Linearity Active Mixer

ABSOLUTE MAXIMUM RATINGS

| | |
|--------------------------------|------------------------------|
| V_{CC} | -0.3V to +5.5V |
| IF+, IF-, RFBIAS, LOSEL | -0.3V to ($V_{CC} + 0.3V$) |
| TAP | +5.0V |
| RFBIAS Current | 5mA |
| RF, LO1, LO2 Input Power | +20dBm |

| | |
|---|---|
| Continuous Power Dissipation ($T_A = +70^\circ\text{C}$) | |
| 20-Pin QFN (derate 20.8mW/ $^\circ\text{C}$ above $T_A = +70^\circ\text{C}$) | 1.66W |
| Operating Temperature Range | -40 $^\circ\text{C}$ to +85 $^\circ\text{C}$ |
| Junction Temperature | +150 $^\circ\text{C}$ |
| Storage Temperature Range | -65 $^\circ\text{C}$ to +150 $^\circ\text{C}$ |
| Lead Temperature (soldering, 10s) | +300 $^\circ\text{C}$ |

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

DC ELECTRICAL CHARACTERISTICS

(Typical Application Circuit, $V_{CC} = 4.75V$ to $5.25V$, no RF signals applied, all RF inputs and outputs terminated with 50Ω , $T_A = -40^\circ\text{C}$ to $+85^\circ\text{C}$, unless otherwise noted. Typical values are at $V_{CC} = 5V$, $T_A = +25^\circ\text{C}$, unless otherwise noted.)

| PARAMETER | SYMBOL | CONDITIONS | MIN | TYP | MAX | UNITS |
|---------------------|-------------|------------|------|------|-----------------|---------------|
| Supply Voltage | V_{CC} | | 4.75 | 5.00 | 5.25 | V |
| Supply Current | I_{CC} | | 138 | 168 | 193 | mA |
| Input High Voltage | V_{IH} | | 3.5 | | $V_{CC} + 0.3V$ | V |
| Input Low Voltage | V_{IL} | | | | 0.4 | V |
| LOSEL Input Current | I_{LOSEL} | | -5 | | +5 | μA |

AC ELECTRICAL CHARACTERISTICS

(Typical Application Circuit, $V_{CC} = 4.75V$ to $5.25V$, $P_{LO} = -5\text{dBm}$ to $+5\text{dBm}$, $f_{RF} = 825\text{MHz}$ to 915MHz , $f_{LO} = 725\text{MHz}$ to 1085MHz , $T_A = -40^\circ\text{C}$ to $+85^\circ\text{C}$, unless otherwise noted. Typical values at $V_{CC} = +5.0V$, $P_{RF} = -5\text{dBm}$, $P_{LO} = 0\text{dBm}$, $f_{RF} = 870\text{MHz}$, $f_{LO} = 770\text{MHz}$, $T_A = +25^\circ\text{C}$, unless otherwise noted.) (Notes 1, 2)

| PARAMETER | SYMBOL | CONDITIONS | MIN | TYP | MAX | UNITS |
|---------------------------------|----------|--|---|-----------|------|----------------------|
| RF Frequency | f_{RF} | | 825 | | 915 | MHz |
| LO Frequency | f_{LO} | | 725 | | 1085 | MHz |
| IF Frequency | f_{IF} | Must meet RF and LO frequency range; IF matching components affect IF frequency range | 70 | | 170 | MHz |
| LO Drive Level | P_{LO} | | -5 | | +5 | dBm |
| Conversion Gain (Note 3) | G_C | $V_{CC} = +5.0V$, $f_{IF} = 100\text{MHz}$, low-side injection, $P_{RF} = 0\text{dBm}$, $P_{LO} = -5\text{dBm}$ | Cellular band, $f_{RF} = 825\text{MHz}$ to 850MHz | | 2.6 | dB |
| | | | GSM band, $f_{RF} = 880\text{MHz}$ to 915MHz | | 2.1 | |
| Gain Variation Over Temperature | | $T_A = -40^\circ\text{C}$ to $+85^\circ\text{C}$ | | -0.0135 | | dB/ $^\circ\text{C}$ |
| Gain Variation from Nominal | | $f_{RF} = 825\text{MHz}$ to 915MHz , 3σ | | ± 0.6 | | dB |

825MHz to 915MHz, SiGe High-Linearity Active Mixer

MAX9982

AC ELECTRICAL CHARACTERISTICS (continued)

(Typical Application Circuit, $V_{CC} = 4.75V$ to $5.25V$, $P_{LO} = -5dBm$ to $+5dBm$, $f_{RF} = 825MHz$ to $915MHz$, $f_{LO} = 725MHz$ to $1085MHz$, $T_A = -40^{\circ}C$ to $+85^{\circ}C$, unless otherwise noted. Typical values at $V_{CC} = +5.0V$, $P_{RF} = -5dBm$, $P_{LO} = 0dBm$, $f_{RF} = 870MHz$, $f_{LO} = 770MHz$, $T_A = +25^{\circ}C$, unless otherwise noted.) (Notes 1, 2)

| PARAMETER | SYMBOL | CONDITIONS | | MIN | TYP | MAX | UNITS |
|--|---------------|--|------------------|-----|-----------|-----|-------|
| Conversion Loss from LO to IF | | Inject $P_{IN} = -20dBm$ at $f_{LO} + 100MHz$ into LO port; measure 100MHz at IF port as P_{OUT} ; no RF signal at RF port | | | 47 | | dB |
| Noise Figure | NF | Cellular band, $f_{RF} = 825MHz$ to $850MHz$ | | | 11.3 | | dB |
| | | GSM band, $f_{RF} = 880MHz$ to $915MHz$ | | | 11.8 | | |
| Input 1dB Compression Point | P_{1dB} | Low-side injection | | | 12.9 | | dBm |
| | | High-side injection | | | 14.5 | | |
| Input Third-Order Intercept Point | IIP3 | $V_{CC} = +5.0V$, $P_{RF} = 0dBm$, $P_{LO} = -5dBm$, $T_A = +25^{\circ}C$ (Notes 3, 4) | | | 26.8 | | dBm |
| Input Third-Order Intercept Point Variation Over Temperature | $\Delta IIP3$ | $T_A = -40^{\circ}C$ to $+85^{\circ}C$ | | | ± 0.5 | | dB |
| 2 RF - 2 LO Spur Rejection | 2×2 | $f_{RF} = 915$, $f_{LO} = 815MHz$, $f_{SPUR} = 865MHz$, $P_{RF} = -5dBm$ | $P_{LO} = +5dBm$ | | 65 | | dBc |
| | | | $P_{LO} = 0dBm$ | | 57 | | |
| 3 RF - 3 LO Spur Rejection | 3×3 | $f_{RF} = 915$, $f_{LO} = 815MHz$, $f_{SPUR} = 848.3MHz$, $P_{RF} = -5dBm$ | $P_{LO} = +5dBm$ | | 89 | | dBc |
| | | | $P_{LO} = 0dBm$ | | 89 | | |
| Maximum LO Leakage at RF Port | | $P_{LO} = -5dBm$ to $+5dBm$, $f_{LO} = 725MHz$ to $1085MHz$ | | | -40 | | dBm |
| Maximum LO Leakage at IF Port | | $P_{LO} = -5dBm$ to $+5dBm$, $f_{LO} = 725MHz$ to $1085MHz$ | | | -28 | | dBm |
| Minimum RF to IF Isolation | | $P_{LO} = -5dBm$ to $+5dBm$, $f_{RF} = 825MHz$ to $915MHz$ | | | 11 | | dB |
| LO1 to LO2 Isolation | | $f_{RF} = 825MHz$ to $915MHz$, $P_{LO1} = P_{LO2} = +5dBm$, $f_{IF} = 100MHz$ (Note 5) | | | 51 | | dB |
| LO Switching Time | | 50% of LOSEL to IF settled within 2° | | | 250 | | ns |
| RF Return Loss | | | | | 19 | | dB |
| LO Return Loss | | LO port active | | | 20 | | dB |
| | | LO port inactive | | | 12 | | |
| IF Return Loss | | RF and LO terminated (Note 6) | | | 15 | | dB |

Note 1: Guaranteed by design and characterization.

Note 2: All limits reflect losses of external components. Output measurements taken at IF OUT of Typical Application Circuit.

Note 3: Production tested.

Note 4: Two tones at 1MHz spacing, 0dBm each at RF port.

Note 5: Measured at IF port at IF frequency. LO1 and LO2 are offset by 1MHz.


Note 6: IF return loss can be optimized by external matching components.

825MHz to 915MHz, SiGe High-Linearity Active Mixer


Typical Operating Characteristics

(Typical Application Circuit, $V_{CC} = 5V$, $f_{IF} = 100MHz$, $P_{RF} = -5dBm$, $P_{LO} = 0dBm$, $T_A = +25^{\circ}C$, unless otherwise noted.)


BIAS CURRENT vs. TEMPERATURE

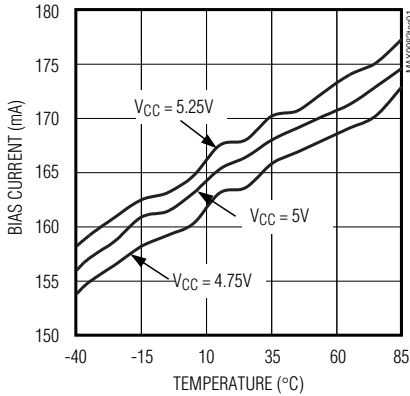


CONVERSION GAIN vs. RF FREQUENCY LOW-SIDE INJECTION

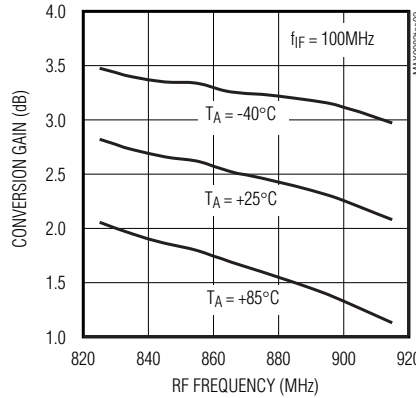


CONVERSION GAIN vs. RF FREQUENCY HIGH-SIDE INJECTION

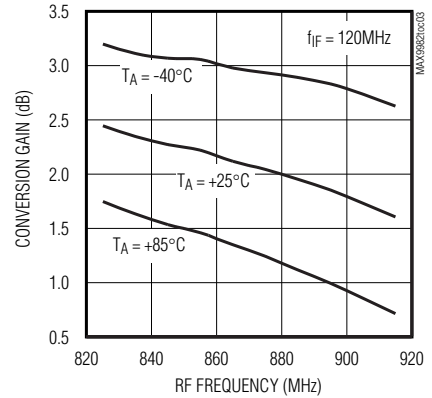


CONVERSION GAIN vs. RF FREQUENCY LOW-SIDE INJECTION

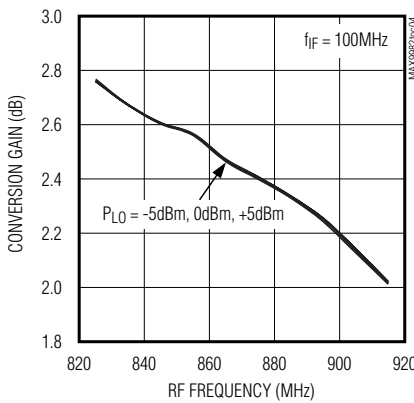


CONVERSION GAIN vs. RF FREQUENCY HIGH-SIDE INJECTION

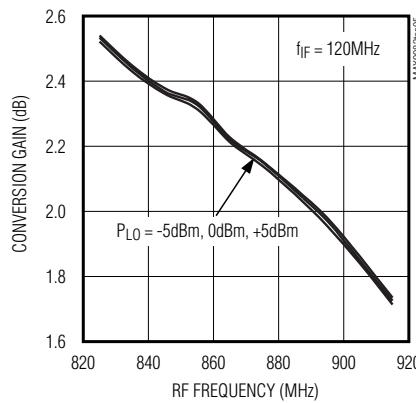


CONVERSION GAIN vs. RF FREQUENCY LOW-SIDE INJECTION

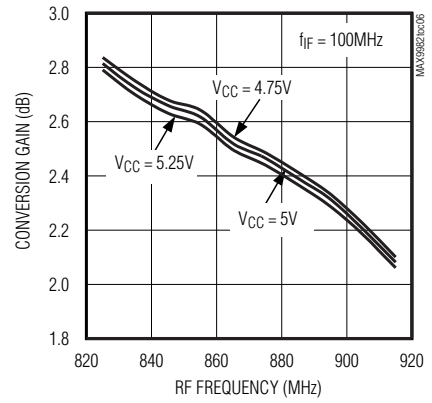


2 RF - 2 LO vs. RF FREQUENCY LOW-SIDE INJECTION

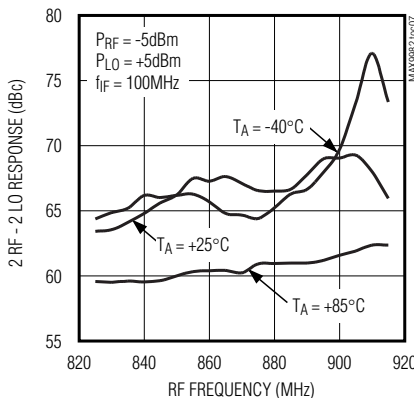

2 LO - 2 RF RESPONSE vs. RF FREQUENCY HIGH-SIDE INJECTION

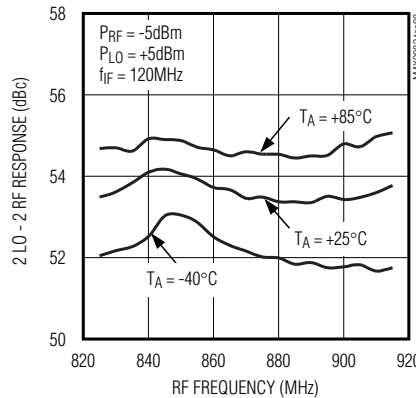

2 RF - 2 LO RESPONSE vs. RF FREQUENCY LOW-SIDE INJECTION

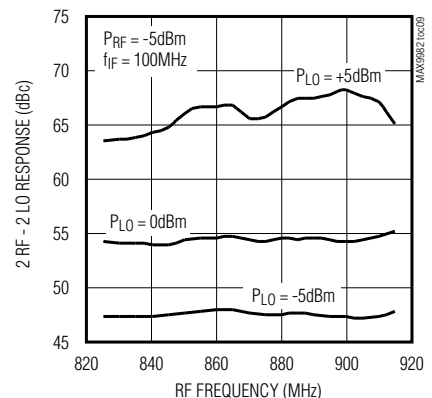


825MHz to 915MHz, SiGe High-Linearity Active Mixer

Typical Operating Characteristics (continued)


(Typical Application Circuit, $V_{CC} = 5V$, $f_{IF} = 100MHz$, $P_{RF} = -5dBm$, $P_{LO} = 0dBm$, $T_A = +25^\circ C$, unless otherwise noted.)

MAX9982


**2 LO - 2 RF RESPONSE vs. RF FREQUENCY
HIGH-SIDE INJECTION**

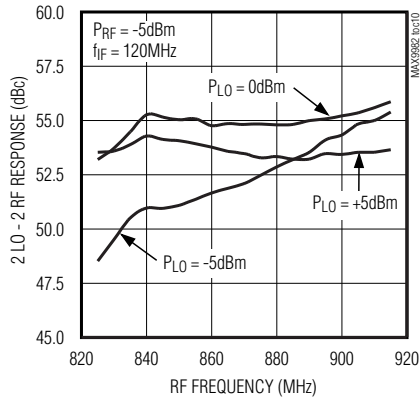


**INPUT IP3 vs. RF FREQUENCY
LOW-SIDE INJECTION**

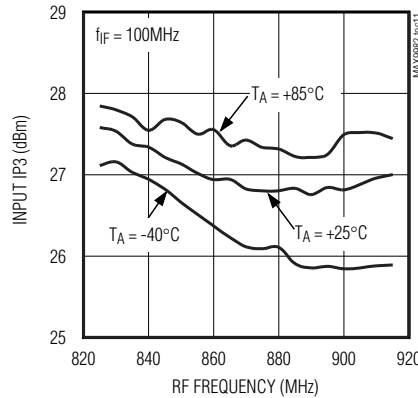


**INPUT IP3 vs. RF FREQUENCY
HIGH-SIDE INJECTION**

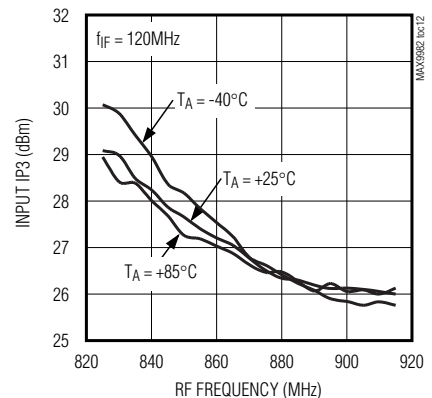


**INPUT IP3 vs. RF FREQUENCY
LOW-SIDE INJECTION**

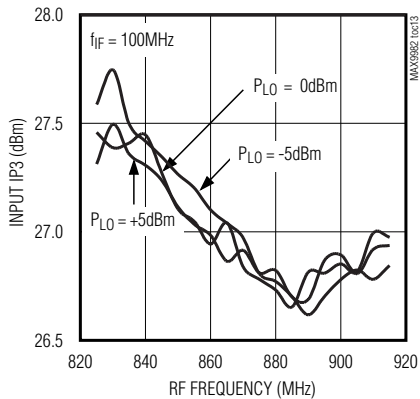


**INPUT IP3 vs. RF FREQUENCY
HIGH-SIDE INJECTION**

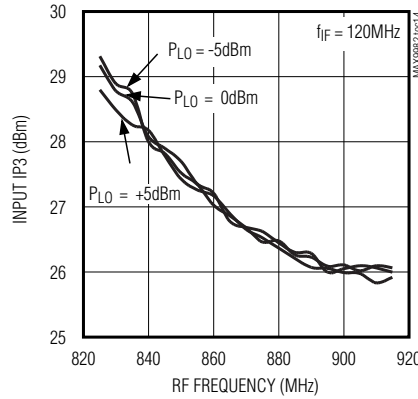


**INPUT IP3 vs. RF FREQUENCY
LOW-SIDE INJECTION**

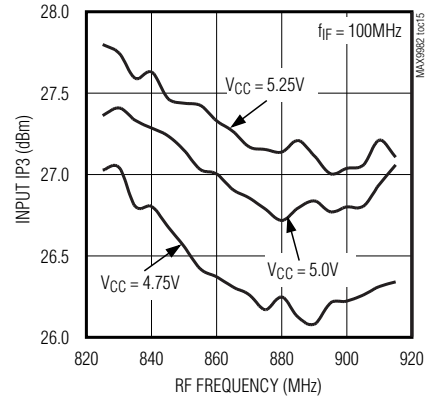


**INPUT P1dB vs. RF FREQUENCY
LOW-SIDE INJECTION**

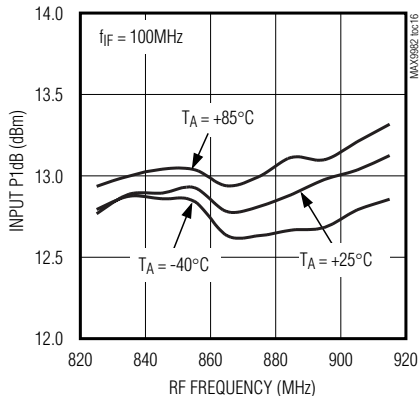

**INPUT P1dB vs. RF FREQUENCY
HIGH-SIDE INJECTION**

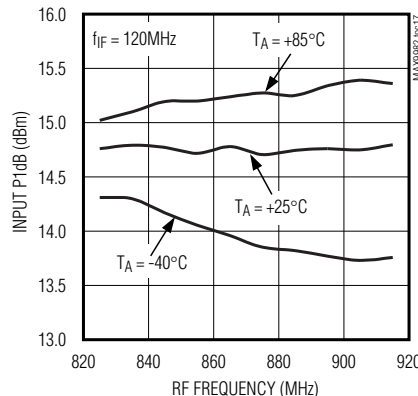

**INPUT P1dB vs. RF FREQUENCY
LOW-SIDE INJECTION**

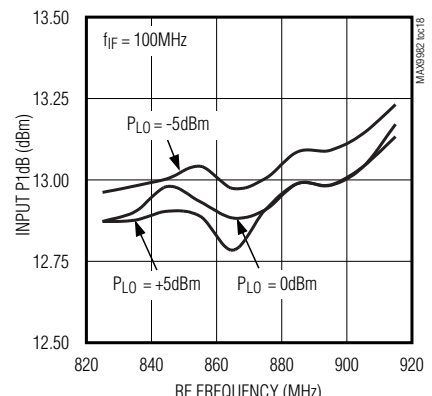


825MHz to 915MHz, SiGe High-Linearity Active Mixer


Typical Operating Characteristics (continued)

(Typical Application Circuit, $V_{CC} = 5V$, $f_{IF} = 100MHz$, $P_{RF} = -5dBm$, $P_{LO} = 0dBm$, $T_A = +25^{\circ}C$, unless otherwise noted.)


**INPUT P1dB vs. RF FREQUENCY
LOW-SIDE INJECTION**

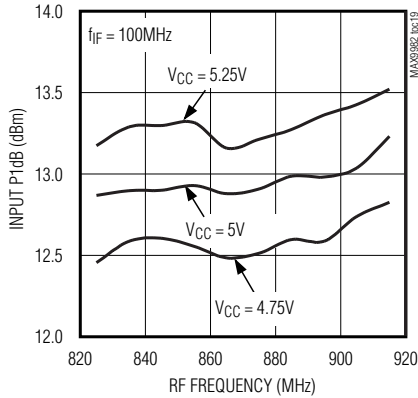


**LO SWITCH ISOLATION vs. RF FREQUENCY
LOW-SIDE INJECTION**

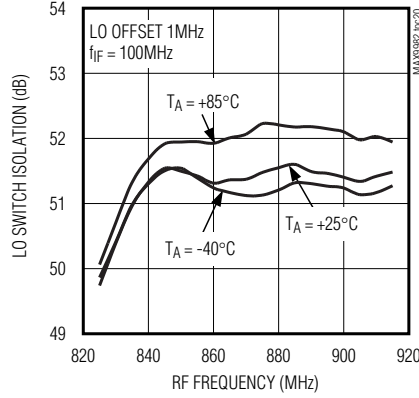


**LO SWITCH ISOLATION vs. RF FREQUENCY
HIGH-SIDE INJECTION**

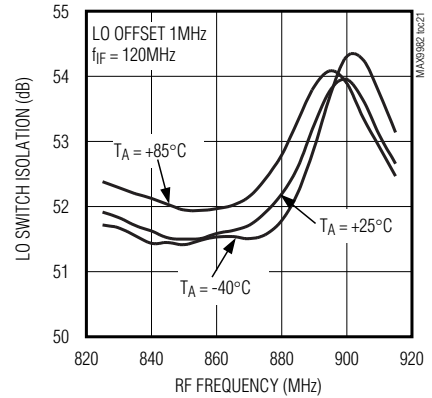


**LO SWITCH ISOLATION vs. RF FREQUENCY
LOW-SIDE INJECTION**

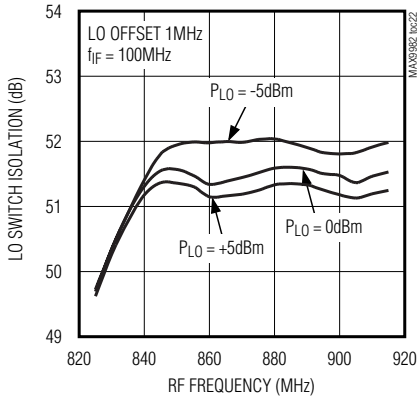


**LO LEAKAGE AT IF PORT
vs. LO FREQUENCY**

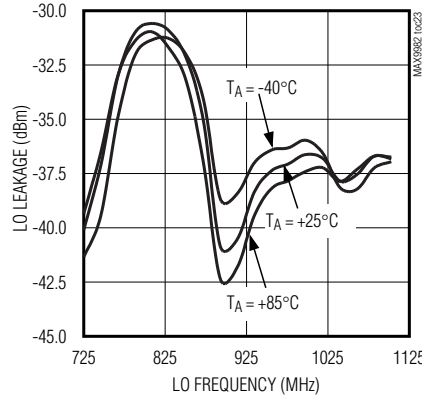


**LO LEAKAGE AT IF PORT
vs. LO FREQUENCY**

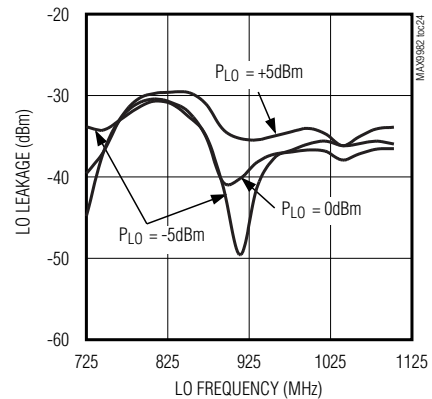


**LO LEAKAGE AT RF PORT
vs. LO FREQUENCY**

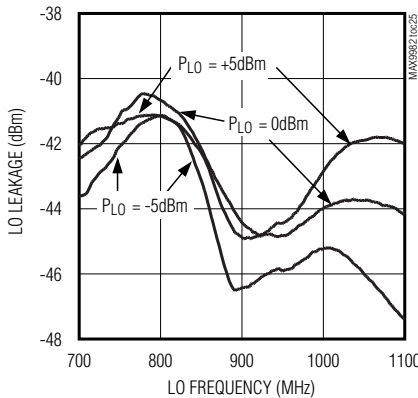

**RF LEAKAGE AT IF PORT
vs. RF FREQUENCY**

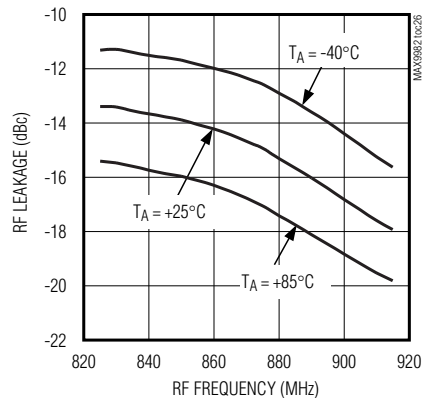

**RF LEAKAGE AT IF PORT
vs. RF FREQUENCY**





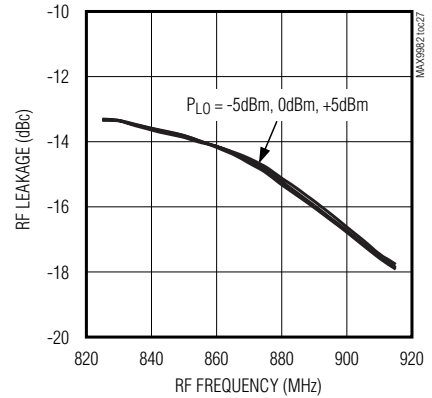


825MHz to 915MHz, SiGe High-Linearity Active Mixer

Typical Operating Characteristics (continued)

(Typical Application Circuit, $V_{CC} = 5V$, $f_{IF} = 100MHz$, $P_{RF} = -5dBm$, $P_{LO} = 0dBm$, $T_A = +25^\circ C$, unless otherwise noted.)

MAX9982

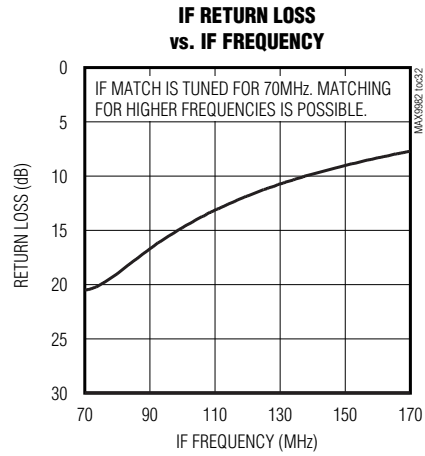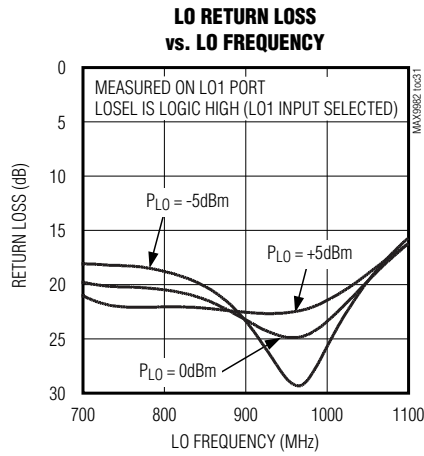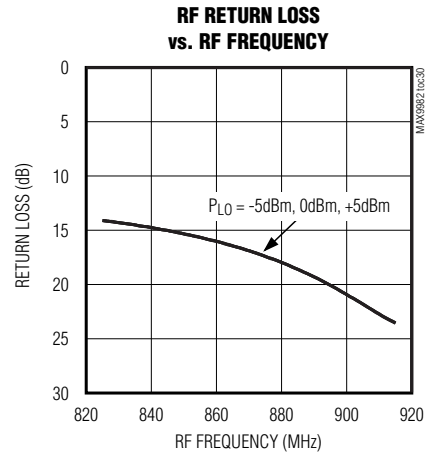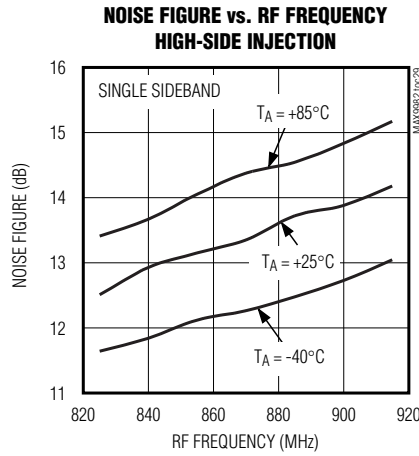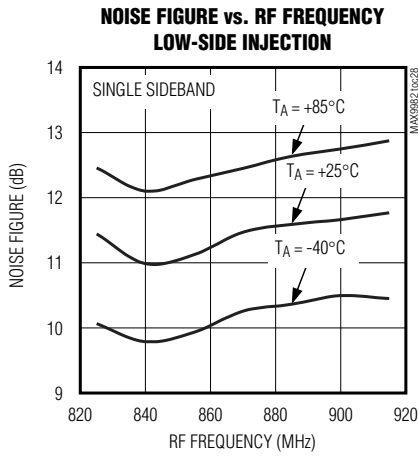

825MHz to 915MHz, SiGe High-Linearity Active Mixer

Pin Description

| PIN | NAME | FUNCTION |
|--|----------|---|
| 1 | RF | RF Input. This input is internally matched to 50Ω and is DC shorted to ground. |
| 2 | TAP | RF Balun Center Tap. Connect bypass capacitors from this pin to ground. |
| 3, 5, 7, 9, 12, 13, 14, 16, 17, 20, EP | GND | Ground |
| 4 | RFBIAS | Bias control for the mixer. Connect a 249Ω resistor from this pin to ground to set the bias current for the mixer. |
| 6, 10 | VCC | Power-Supply Connections. Connect a 0.1μF bypass capacitor from each VCC pin to ground. |
| 8 | LOSEL | Local Oscillator Select. Set this pin to logic HIGH to select LO1; set to logic LOW to select LO2. |
| 11 | LO1 | Local Oscillator Input 1. This input is internally matched to 50Ω and is DC shorted to ground when selected. Requires a DC-blocking capacitor. |
| 15 | LO2 | Local Oscillator Input 2. This input is internally matched to 50Ω and is DC shorted to ground when selected. |
| 18, 19 | IF-, IF+ | Differential IF Output. Connect 560nH pullup inductors and 137Ω pullup resistors from each of these pins to VCC for a 70MHz to 120MHz IF range. |

Table 1. Component List

| COMPONENT | VALUE | SIZE | PART |
|----------------|--------------|----------------------|--------------------------|
| C1, C2, C6, C7 | 33pF | 0603 | Murata GRM1885C1H330J |
| C3 | 0.033μF | 0603 | Murata GRM188R71E333K |
| C4, C5 | 0.1μF | 0603 | Murata GRM188FS1E104Z |
| C8, C11 | 220pF | 0603 | Murata GRM1885C1H221J |
| C9, C10 | 330pF | 0603 | Murata GRM1885C1H331J |
| L1, L2 | 560nH | 1008 | Coilcraft 1008CS-561XJBB |
| R1 | 249Ω ±1% | 0603 | Panasonic ERJ-3EKF2490V |
| R3, R4 | 137Ω ±1% | 0603 | Panasonic ERJ-3EKF1370V |
| T1 | 4:1 (200:50) | — | Mini-Circuits TC4-1W-7A |
| U1 | — | 20-pin 5mm x 5mm QFN | MAX9982ETP |

Detailed Description

The MAX9982 downconverter mixer is designed for GSM and CDMA base station receivers with an RF frequency between 825MHz and 915MHz. It implements an active mixer that provides 2dB of overall conversion gain to the receive path, removing the need for an additional IF amplifier. The mixer has excellent input IP3 measuring +26.8dBm. The device also features integrated RF and LO baluns that allow the mixers to be driven with single-ended signals.

RF Inputs

The MAX9982 has one input (RF) that is internally matched to 50Ω requiring no external matching components. A 33pF DC-blocking capacitor is required at the input since the input is internally DC shorted to ground through a balun. The input frequency range is 825MHz to 915MHz.

LO Inputs

The mixer can be used for either high-side or low-side injection applications with an LO frequency range of

825MHz to 915MHz, SiGe High-Linearity Active Mixer

MAX9982

725MHz to 1085MHz. An internal LO switch allows for switching between two single-ended LO ports; this is useful for fast frequency changes/frequency hopping. LO switching time is typically less than 250ns. The switch is controlled by a digital input (LOSEL) that when high, selects LO1 and when low, selects LO2.

Internal LO buffers allow for a wide power range on the LO ports. The LO signal power can vary from -5dBm to +5dBm. LO1 and LO2 are internally matched to 50Ω, so only a 33pF DC-blocking capacitor is required at each LO port.

IF Outputs

This mixer has an IF frequency range of 70MHz to 170MHz. The differential IF output ports require external pullup inductors to V_{CC} to resonate out the differential on-chip capacitance of 1.8pF. See the *Typical Application Circuit* for recommended component values for an IF optimized for 70MHz to 100MHz. Higher IF frequencies can be optimized by reducing the values of L1 and L2.

Removing the ground plane from underneath L1 and L2 reduces parasitic capacitive loading and improves VSWR.

Bias Circuitry

Connect a bias resistor from RFBIAS to ground to set the mixer bias current. A nominal resistor value of 249Ω sets an input IP3 of +26.8dBm and supply current of 168mA.

Applications Information

Layout Considerations

A properly designed PC board is an essential part of any RF/microwave circuit. Keep RF signal lines as short as possible to reduce losses, radiation, and inductance. For best performance, route the ground pin traces directly to the exposed paddle underneath the package. Solder the exposed pad on the bottom of the device package evenly to the board ground plane to provide a heat transfer path along with RF grounding. If the PC board ground plane is not immediately available on the top metal layer, provide multiple vias between the exposed paddle connection and the PC board ground plane.

Power-Supply Bypassing

Proper voltage supply bypassing is essential for high-frequency circuit stability. Bypass each V_{CC} pin with a 0.1μF capacitor. Bypass TAP by placing a 33pF (C2) to ground within 100 mils of the TAP pin.

Chip Information

TRANSISTOR COUNT: 179


PROCESS: BiCMOS

825MHz to 915MHz, SiGe High-Linearity Active Mixer

Package Information

(The package drawing(s) in this data sheet may not reflect the most current specifications. For the latest package outline information, go to www.maxim-ic.com/packages.)

MAX9982

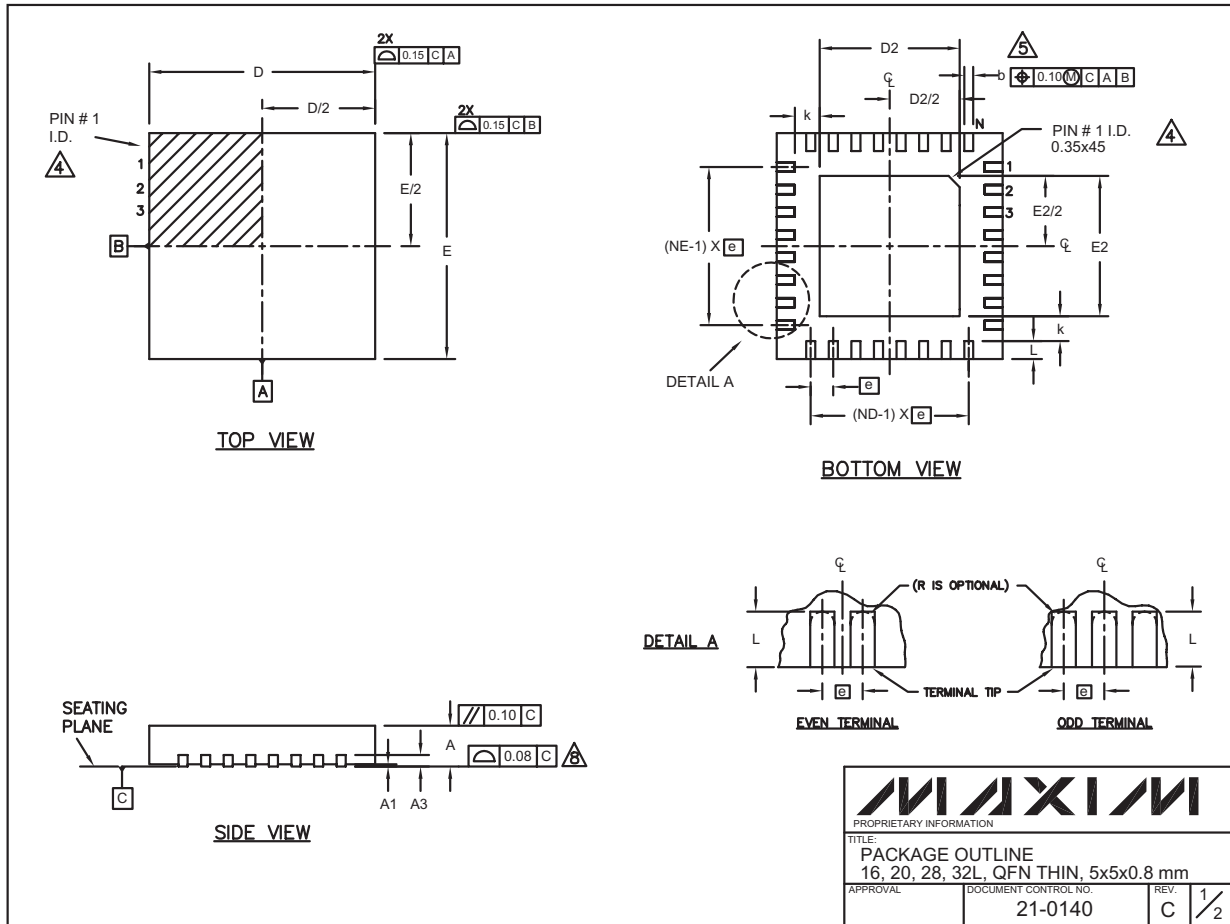

QFN THIN:EPS

| | | |
|--|--|------------------------------|
| MAXIM | | |
| <small>PROPRIETARY INFORMATION</small> | | |
| TITLE: PACKAGE OUTLINE 16, 20, 28, 32L, QFN THIN, 5x5x0.8 mm | | |
| <small>APPROVAL</small> | <small>DOCUMENT CONTROL NO.</small> 21-0140 | <small>REV.</small> C 1/2 |

825MHz to 915MHz, SiGe High-Linearity Active Mixer


Package Information (continued)

(The package drawing(s) in this data sheet may not reflect the most current specifications. For the latest package outline information, go to www.maxim-ic.com/packages.)

| COMMON DIMENSIONS | | | | | | | | | | | | | EXPOSED PAD VARIATIONS | | | | | | | |
|-------------------|-----------|------|------|-----------|------|------|-----------|------|------|-----------|------|------|------------------------|------|------|------|------|------|------|--|
| PKG. SYMBOL | 16L 5x5 | | | 20L 5x5 | | | 28L 5x5 | | | 32L 5x5 | | | PKG. CODES | D2 | | | E2 | | | |
| | MIN. | NOM. | MAX. | MIN. | NOM. | MAX. | MIN. | NOM. | MAX. | MIN. | NOM. | MAX. | | MIN. | NOM. | MAX. | MIN. | NOM. | MAX. | |
| A | 0.70 | 0.75 | 0.80 | 0.70 | 0.75 | 0.80 | 0.70 | 0.75 | 0.80 | 0.70 | 0.75 | 0.80 | T1655-1 | 3.00 | 3.10 | 3.20 | 3.00 | 3.10 | 3.20 | |
| A1 | 0 | 0.02 | 0.05 | 0 | 0.02 | 0.05 | 0 | 0.02 | 0.05 | 0 | 0.02 | 0.05 | T2055-2 | 3.00 | 3.10 | 3.20 | 3.00 | 3.10 | 3.20 | |
| A3 | 0.20 REF. | | | 0.20 REF. | | | 0.20 REF. | | | 0.20 REF. | | | T2855-1 | 3.15 | 3.25 | 3.35 | 3.15 | 3.25 | 3.35 | |
| b | 0.25 | 0.30 | 0.35 | 0.25 | 0.30 | 0.35 | 0.20 | 0.25 | 0.30 | 0.20 | 0.25 | 0.30 | T2855-2 | 2.60 | 2.70 | 2.80 | 2.60 | 2.70 | 2.80 | |
| D | 4.90 | 5.00 | 5.10 | 4.90 | 5.00 | 5.10 | 4.90 | 5.00 | 5.10 | 4.90 | 5.00 | 5.10 | T3255-2 | 3.00 | 3.10 | 3.20 | 3.00 | 3.10 | 3.20 | |
| E | 4.90 | 5.00 | 5.10 | 4.90 | 5.00 | 5.10 | 4.90 | 5.00 | 5.10 | 4.90 | 5.00 | 5.10 | | | | | | | | |
| e | 0.80 BSC. | | | 0.65 BSC. | | | 0.50 BSC. | | | 0.50 BSC. | | | | | | | | | | |
| k | 0.25 | - | - | 0.25 | - | - | 0.25 | - | - | 0.25 | - | - | | | | | | | | |
| L | 0.45 | 0.55 | 0.65 | 0.45 | 0.55 | 0.65 | 0.45 | 0.55 | 0.65 | 0.45 | 0.55 | 0.65 | | | | | | | | |
| N | 16 | | | 20 | | | 28 | | | 32 | | | | | | | | | | |
| ND | 4 | | | 5 | | | 7 | | | 8 | | | | | | | | | | |
| NE | 4 | | | 5 | | | 7 | | | 8 | | | | | | | | | | |
| JEDEC | WHHB | | | WHHC | | | WHHD-1 | | | WHHD-2 | | | | | | | | | | |

NOTES:

- DIMENSIONING & TOLERANCING CONFORM TO ASME Y14.5M-1994.
- ALL DIMENSIONS ARE IN MILLIMETERS. ANGLES ARE IN DEGREES.
- N IS THE TOTAL NUMBER OF TERMINALS.
- THE TERMINAL #1 IDENTIFIER AND TERMINAL NUMBERING CONVENTION SHALL CONFORM TO JESD 95-1 SPP-012. DETAILS OF TERMINAL #1 IDENTIFIER ARE OPTIONAL, BUT MUST BE LOCATED WITHIN THE ZONE INDICATED. THE TERMINAL #1 IDENTIFIER MAY BE EITHER A MOLD OR MARKED FEATURE.
- DIMENSION b APPLIES TO METALLIZED TERMINAL AND IS MEASURED BETWEEN 0.25 mm AND 0.30 mm FROM TERMINAL TIP.
- ND AND NE REFER TO THE NUMBER OF TERMINALS ON EACH D AND E SIDE RESPECTIVELY.
- DEPOPULATION IS POSSIBLE IN A SYMMETRICAL FASHION.
- COPLANARITY APPLIES TO THE EXPOSED HEAT SINK SLUG AS WELL AS THE TERMINALS.
- DRAWING CONFORMS TO JEDEC MO220.
- WARPAGE SHALL NOT EXCEED 0.10 mm.

| | | |
|---|---------------------------------|---------------|
|  | | |
| PROPRIETARY INFORMATION | | |
| TITLE: PACKAGE OUTLINE 16, 20, 28, 32L, QFN THIN, 5x5x0.8 mm | | |
| APPROVAL | DOCUMENT CONTROL NO. 21-0140 | REV. C 2/2 |

Maxim cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim product. No circuit patent licenses are implied. Maxim reserves the right to change the circuitry and specifications without notice at any time.

12 **Maxim Integrated Products, 120 San Gabriel Drive, Sunnyvale, CA 94086 408-737-7600**