



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





EXPANDABLE CONTROL
BOARDS

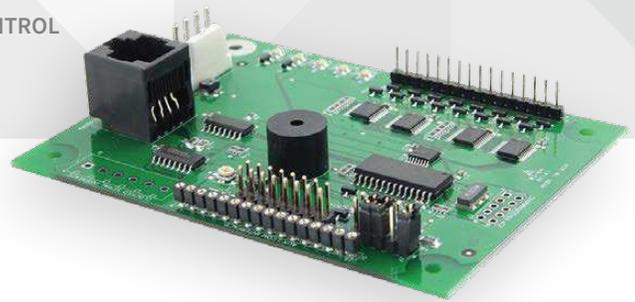

RABBITNET™ SERIES

A point-to-point synchronous protocol that connects additional I/O and analog cards to a master device

The RabbitNet signals are differential RS-422, which are series-terminated at the source. Peripheral cards and master controllers connect using a standard CAT 5/6 Ethernet cable or a crossover cable if using an OP7200 as a slave display.

There are several RabbitNet card options which include:

- RN1100 - Digital I/O
- RN1200 - A/D
- RN1300 - D/A
- RN1400 - Relay expansion
- RN1600 - Keypad display interface

The RabbitNet system typically consists of a master single-board computer and one or two peripheral cards. Several Rabbit SBCs such as the BL4S200 or BL2600 act as the master controller for fast data processing and provide the power on board needed for the peripheral cards.

Distances between a master unit and peripheral cards can be up to 10 m or 33 ft with speeds up to 1 Megabit per second. Cards can be mounted in 100 mm DIN rail trays and optionally there is a RN1000 hub to connect up to 8 devices.

BENEFITS

- 8 channels of 12-bit analog output
- 24 protected and filtered digital inputs
- 16 high-speed protected sinking/sourcing digital outputs
- 6 SPDT Relays
- 10 A maximum switching current (5A DC)
- Display and keypad

RELATED PRODUCTS



Dynamic C®



Rabbit® SBC
BL4S200
Series



Rabbit® SBC
BL2600
Series




Rabbit®
OP7200
eDisplay



Rabbit® SBC
BL2100
Series

APPLICATION EXAMPLE

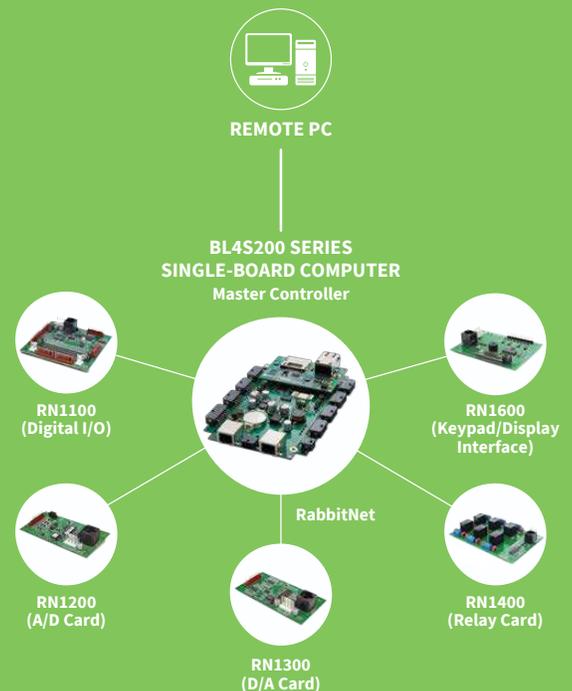

SPECIFICATIONS

Product Models

RABBITNET CARD	RN1100	RN1200	RN1300	RN1400	RN1600
FEATURE	Digital I/O Expansion	A/D Expansion	D/A Expansion	Relay Expansion	Keypad /Display
SPECIFICATIONS	<p>Digital Inputs: 24, protected to +/-40VDC, switching threshold is 1.5V nominal</p> <p>Digital Outputs: 16, push-pull up to 200mA each, 40VDC max</p> <p>Analog Inputs: 4 buffered channels 10-bit resolution, 8-bit accuracy, sample rate 1.5K samples/s,</p> <ul style="list-style-type: none"> • 2 channels 0-10V, single ended • 1 channel 0-1V, single ended • 1 channel -0.25-.25V differential input resistance >100K 	<p>Analog Inputs: 8 single-ended 11-bit or 4 differential 12-bit analog inputs @ 1M input impedance, 2.5K samples/s sampling rate</p> <p>All 8 channels can be configured as 11-bit 4-20 mA analog inputs</p>	8 channels of 12-bit analog outputs, 8 ohm output impedance, 2.5kHz update rate; software controlled output-voltage ranges: 0-2.5V, 0-5V, 0-10V, 0-20V (channels AOUT0-AOUT1) 0-10V, 0-20V (channels AOUT2-AOUT7)	<p>6 SPDT Relay Outputs:</p> <ul style="list-style-type: none"> • Max contact settling time: 10ms, Max switching voltage: 250VAC, 125VDC • Max switching capacity: 1200 VA, 240W DC • Snubbers: Built-in 47W, 100nF 	<p>Keypad Interface: 1-64 keys</p> <p>LCD interface: 1x8 - 4x20 character display LED backlight support</p>
RABBITNET™ SERIAL PORT	RS-422, 1Mbps				
POWER	+/-5 VDC, 20 mA	+5 VDC, 100 mA	+5 VDC, 20 mA DCIN>13V for 10V output, >23V for 20V output, 100 mA	5V, 500m (all relays engaged) Power save: 250 mA	5V, <60 mA (excluding backlight)
OPERATING TEMPERATURE	-40° C to +70° C	-40° C to +70° C	-40° C - +85° C	-40° C to +70° C	-40° C - +85° C
HUMIDITY	5-95%, non-condensing				
CONNECTORS	<p>Friction lock connectors:</p> <ul style="list-style-type: none"> • 6 polarized 9-position terminals with .1" pitch • 2 2-position power terminals with 0.156" pitch • 1 4-position terminal with .156" pitch • 1 RJ-45 RabbitNet jack 	<p>Friction lock connectors:</p> <ul style="list-style-type: none"> • 1 polarized 9-position terminals with 0.1" pitch • 1 4-position terminal with 0.156" pitch • 1 RJ-45 RabbitNet jack 		<ul style="list-style-type: none"> • 6 screw terminal headers max 14AWG • 1 4-position friction lock connector with .156" pitch • 1 RJ-45 RabbitNet jack 	<ul style="list-style-type: none"> • 1 RJ-45 RabbitNet jack • 0.156" 4-position vertical power header • 1x16, 0.1" position vertical header for keypad interface • 2x8, 0.1" vertical header for LCDM interface • 1x16, 0.1" vertical socket for LCDM interface
BOARD SIZE	3.55" x 3.95" x 0.67" (90 x 100 x 17mm)	1.94" x 3.94" x 0.67" (50 x 100 x 17mm)	1.97" x 3.94" x .67" (50 x 100 x 17mm)	3.94" x 5.87" x .75" (100 x 150 x 19mm)	2.95" x 3.94" x .77" (75 x 100 x 20mm) (Din rail mountable)

SPECIFICATIONS

DESCRIPTION

20-101-0612	RN1100 RabbitNet Digital I/O Expansion
20-101-0616	RN1200 RabbitNet A/D Expansion
20-101-0688	RN1300 RabbitNet D/A Expansion
20-101-1198	RN1400 RabbitNet Relay Expansion Card
20-101-0879	RN1600 RabbitNet Keypad/Display Interface Card

DIGI SERVICE AND SUPPORT / You can purchase with confidence knowing that Digi is always available to serve you with expert technical support and our industry leading warranty. For detailed information visit www.digi.com/support.

© 1996-2015 Digi International Inc. All rights reserved.
All trademarks are the property of their respective owners.

91001657
C1/915

DIGI INTERNATIONAL WORLDWIDE HQ
877-912-3444 / 952-912-3444 / www.digi.com

DIGI INTERNATIONAL FRANCE
+33-1-55-61-98-98 / www.digi.fr

DIGI INTERNATIONAL JAPAN
+81-3-5428-0261 / www.digi-intl.co.jp

DIGI INTERNATIONAL SINGAPORE
+65-6213-5380

DIGI INTERNATIONAL CHINA
+86-21-50492199 / www.digi.com.cn

