



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





# mikromedia™

## for Tiva™ C Series

Compact multimedia development system rich with on-board peripherals  
for all-round development on **TM4C123GH6PZ** device



# TO OUR VALUED CUSTOMERS

I want to express my thanks to you for being interested in our products and for having confidence in MikroElektronika.

The primary aim of our company is to design and produce high quality electronic products and to constantly improve the performance thereof in order to better suit your needs.

A white, handwritten signature in cursive script, appearing to read 'N. Matic', set against a dark green background.

Nebojsa Matic  
General Manager

# Table of Contents

Introduction to mikromedia for Tiva™ C Series	4	Programming with mikroProg™ programmer	16
Package Contains	5	4. Reset Button	18
Key Features	6	5. Crystal oscillator	20
System Specification	7	6. MicroSD Card Slot	22
1. Power supply	8	7. Touch Screen	24
Battery power supply	8	8. Audio Module	26
USB power supply	8	9. USB connection	28
2. TM4C123GH6PZ microcontroller	10	10. Accelerometer	30
Key microcontroller features	10	11. Flash Memory	32
3. Programming the microcontroller	11	12. Pads	34
Programming with mikroBootloader	12	13. Pinout	35
step 1 - Connecting mikromedia	12	14. Dimensions	36
step 2 - Browsing for .HEX file	13	15. Mikromedia accessories	37
step 3 - Selecting .HEX file	13	What's next?	38
step 4 - Uploading .HEX file	14		
step 5 - Finish upload	15		

# Introduction to mikromedia for Tiva™ C Series

The **mikromedia for Tiva™ C Series** is a compact development system with lots of on-board peripherals which allow development of devices with multimedia contents. The central part of the system is a 32-bit **ARM® Cortex™-M4 TM4C123GH6PZ** microcontroller. The mikromedia for Tiva™ C Series features integrated modules such as stereo MP3 codec, **TFT 320x240** touch screen display, accelerometer, MMC/SD card slot, 8 Mbit flash memory, battery charger. The board also contains MINI-B USB connector, two 1x26 connection pads and other. It comes pre-programmed with USB HID bootloader, but can also be programmed with external programmers, such as **mikroProg™ for Tiva™ C Series** or other programmers. Mikromedia is compact and slim, and perfectly fits in the palm of your hand, which makes it a convenient platform for mobile devices.




# Package Contains



- 01 Damage resistant protective box



- 02 mikromedia for Tiva™ C Series development system



- 03 Two 1x26 male headers and one 1x5 header



- 04 mikromedia for Tiva™ C Series user's guide




- 05 mikromedia for Tiva™ C Series schematic and pinout




- 06 USB cable

# Key Features

- 01 RESET button
- 02 Connection Pads
- 03 TFT 320x240 display
- 04 USB MINI-B connector
- 05 Charge indication LED
- 06 Li-Polymer battery connector
- 07 Power indication LED
- 08 3.5mm headphone connector
- 09 Power supply regulator
- 10 VS1053 Stereo mp3 coder/decoder
- 11 Tiva™ C Series ARM® Cortex™-M4 TM4C123GH6PZ
- 12 Crystal oscillator
- 13 Accelerometer
- 14 Serial Flash memory
- 15 microSD Card Slot
- 16 Cortex Debug connector
- 17 mikroProg™ connector

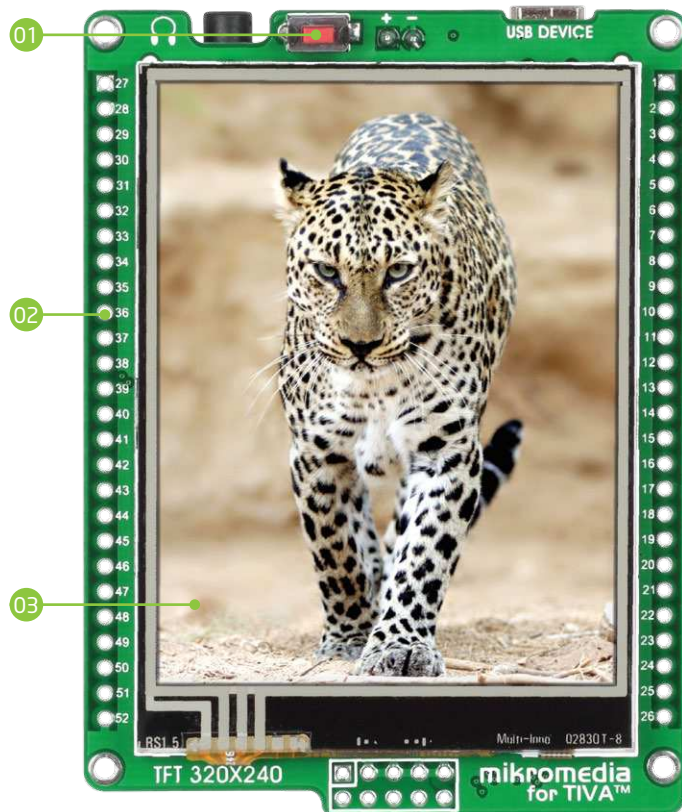

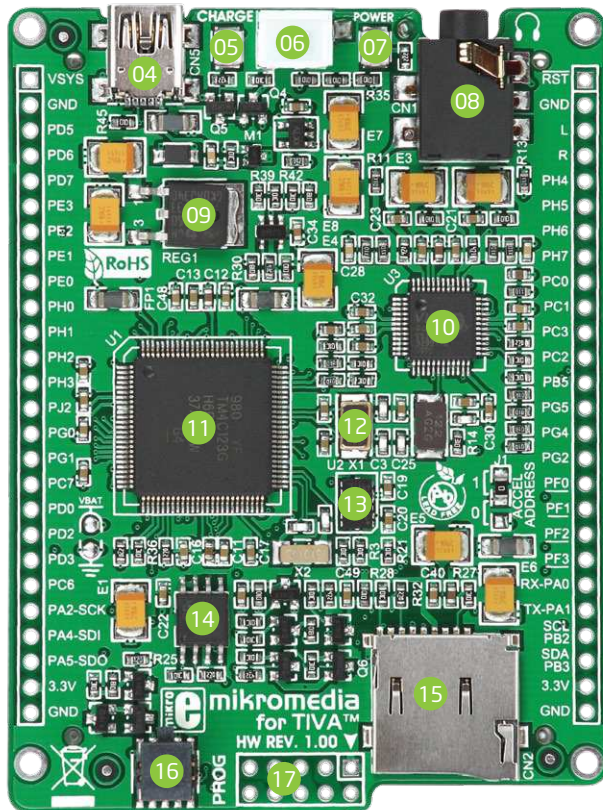

## System Specification



**power supply**  
Via USB cable (5V DC)



**power consumption**  
56 mA with erased MCU (when on-board modules are inactive)



**board dimensions**  
81.2 x 60.5 mm (3.19 x 2.38 inch)



**weight**  
~50g (0.11lbs)



**CAUTION: Electrostatic Sensitive Device**  
Permanent damage may occur on devices subjected to high energy electrostatic discharges which readily accumulate on the human body or test equipment and can discharge without detection.



# 1. Power supply

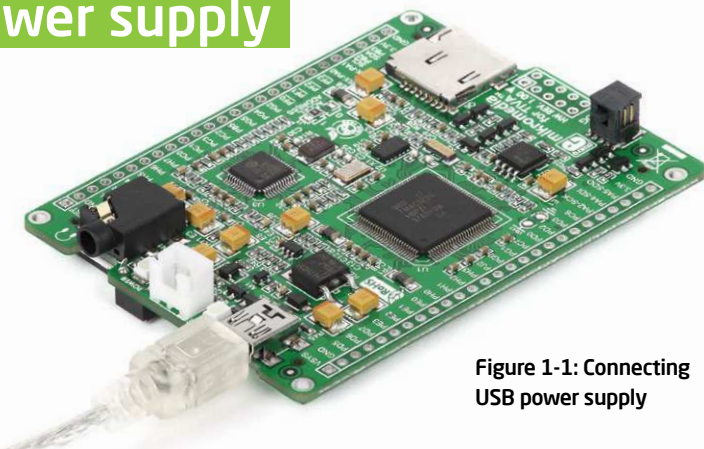


Figure 1-1: Connecting USB power supply

## USB power supply

You can power up the board using the **MINI-B USB** cable provided in the package. On-board voltage regulators provide the appropriate voltage levels to each component on the board. **Power LED (GREEN)** will indicate the presence of a power supply.

## Battery power supply

You can also power the board with a **Li-Polymer** battery, using the on-board battery connector. On-board battery charger circuit **MCP73832** enables you to charge the battery over the USB connection. **LED diode (RED)** will indicate when the battery is charging. Charging current is ~250mA and charging voltage is 4.2V DC.

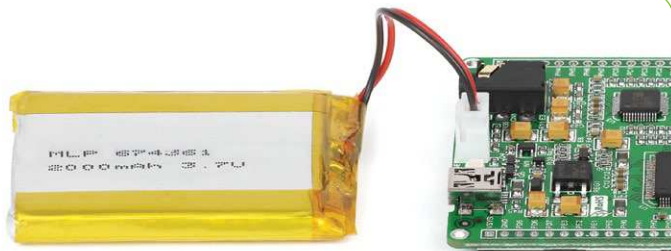


Figure 1-2: Connecting Li-Polymer battery

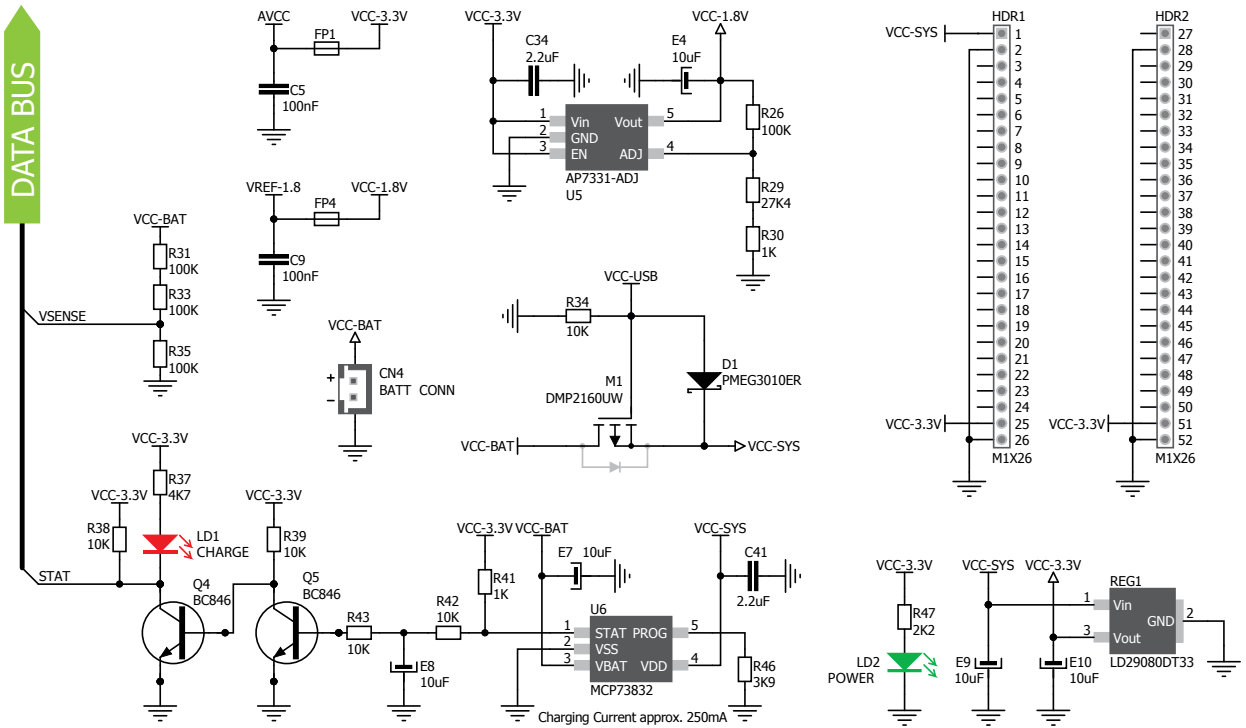



Figure 1-3: Power supply schematics

## 2. TM4C123GH6PZ microcontroller


The mikromedia for Tiva™ C Series development board comes with the **ARM® Cortex™-M4 TM4C123GH6PZ** microcontroller. This high-performance **32-bit** microcontroller with its integrated modules and in combination with other on-board modules is ideal for multimedia applications.

### Key microcontroller features

- Up to **100 DMIPS** Operation;
- 32-bit architecture;
- 256KB of Flash;
- 32KB of SRAM, 2KB EEPROM;
- 69 I/O pins;
- Internal oscillator 16MHz, 30kHz, PLL;
- 16/32 bit and 32/64 Timers;
- Ethernet, UART, SPI, I<sup>2</sup>C, CAN, ADC etc.

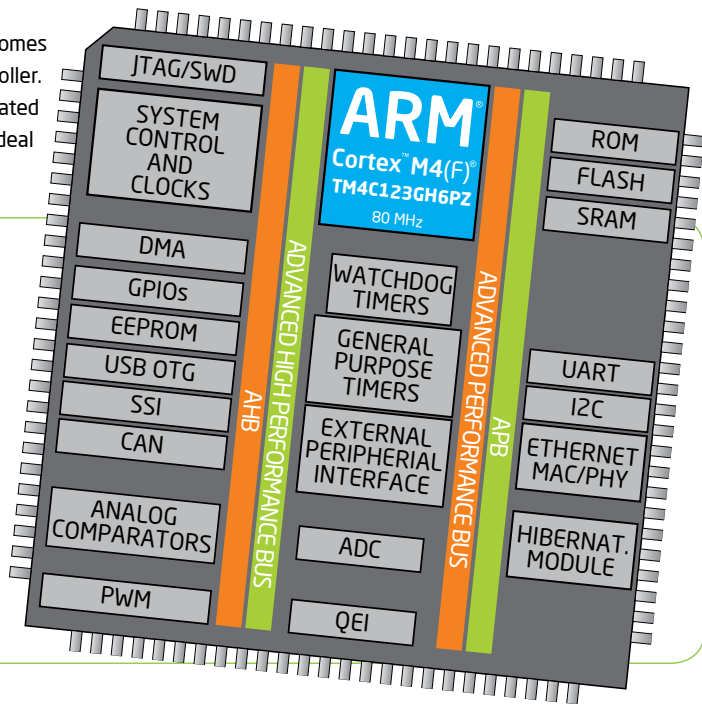

# 3. Programming the microcontroller

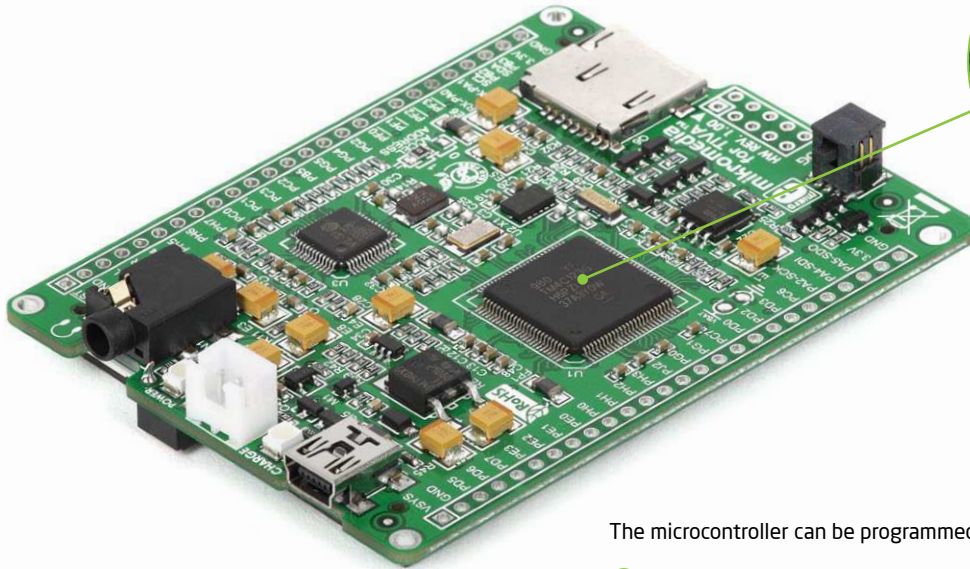

**Figure 3-1:**  
**TM4C123GH6PZ**  
**ARM® Cortex™-M4**  
**Microcontroller**

The microcontroller can be programmed in two ways:

- 01 Over USB mikroBootloader
- 02 Using mikroProg™ for Tiva or other external programmers


# Programming with mikroBootloader

The microcontroller is preprogrammed with USB HID Bootloader, which can be used to upload new device firmware. To transfer firmware .HEX file from a PC to an MCU you need to use the mikroBootloader USB HID application, which can be downloaded from:



[www.mikroe.com/downloads/get/2090/mikrobootloader\\_tiva\\_tm4c123gh6p\\_v130.zip](http://www.mikroe.com/downloads/get/2090/mikrobootloader_tiva_tm4c123gh6p_v130.zip)

Upon download, unzip the package to a desired location and start the mikroBootloader application:

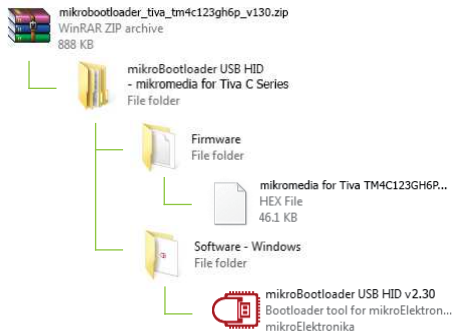

## step 1 - Connecting mikromedia



Figure 3-2: USB HID mikroBootloader window

- 01 In order to start, connect the USB cable or (if already connected) press the **Reset** button on your board.
- 02 Click the **Connect** button within 5s to enter the bootloader mode, otherwise the existing program will execute.

## step 2 - Browsing for .HEX file



Figure 3-3: Browse for HEX

- 01 Click the **Browse for HEX** button and from a pop-up window (Figure 3.4) choose the .HEX file you wish to upload to your MCU's memory.

## step 3 - Selecting .HEX file

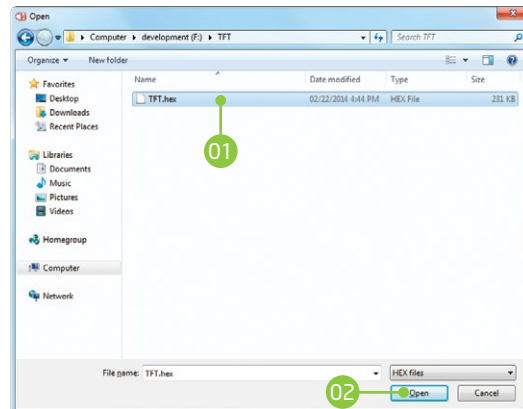


Figure 3-4: Selecting HEX

- 01 Select the .HEX file using the Open dialog window.
- 02 Click the **Open** button.

## step 4 - Uploading .HEX file



Figure 3-5: Begin uploading

- 01 In order to upload the .HEX file click the **Begin uploading** button.



Figure 3-6: Progress bar

- 01 Monitor the upload process via the progress bar.

## step 5 - Finish upload



Figure 3-7: Restarting MCU

- 01** Click the **OK** button after uploading is finished. The board will be automatically reset and after 5 seconds your new program will execute.



Figure 3-8: mikroBootloader ready for next job



# Programming with mikroProg™ programmer



The microcontroller can be programmed with the external **mikroProg™ programmer** and **mikroProg™ Suite for ARM® software**. The external programmer is connected to the development system via JTAG/SWD connector. **mikroProg™** is a fast USB 2.0 programmer with hardware Debugger support. It supports ARM® Cortex™-M4 microcontrollers from Tiva™ C Series. Outstanding performance, easy operation and elegant design are its key features. The board also contains a Cortex Debug connector which can be used with other external programmers.

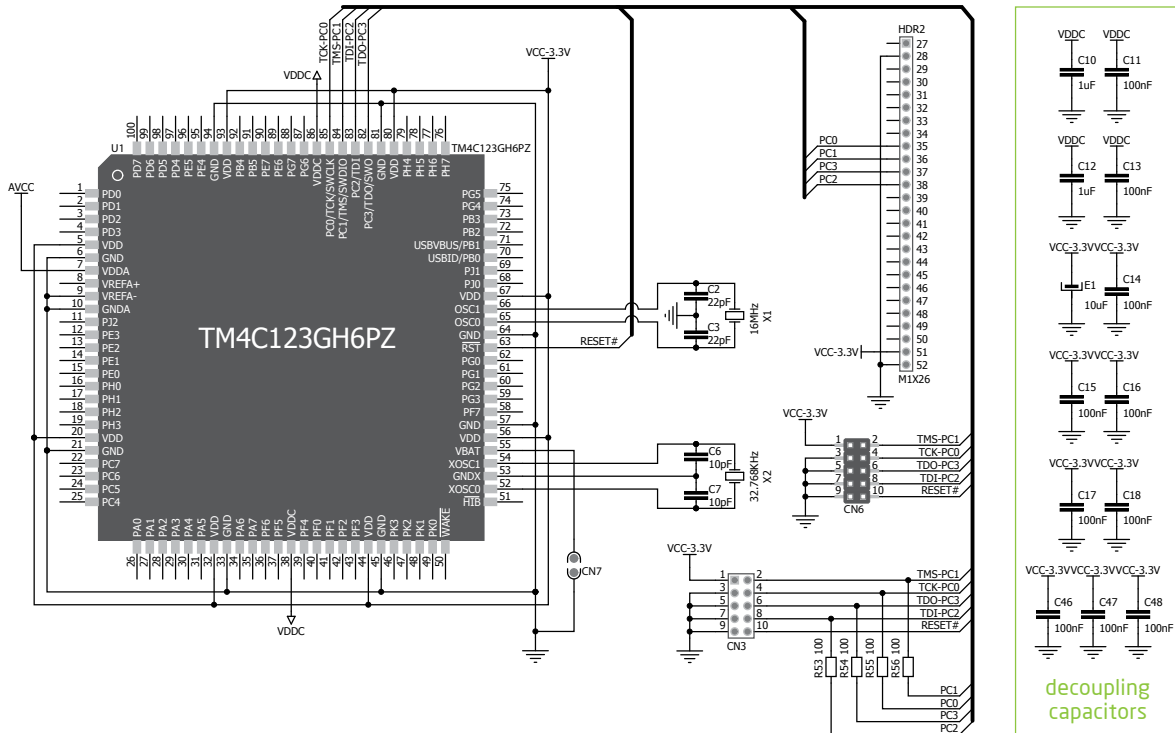


Figure 3-10: mikroProg™ programmer connection schematic

## 4. Reset Button

Figure 4-2:  
Frontal reset button



mikromedia for Tiva™ C Series is equipped with a reset button, which is located at the top of the front side (**Figure 4-2**). If you want to reset the circuit, press the reset button. It will generate a low voltage level on the microcontroller reset pin (input). In addition, a reset can be externally provided through **pin 27** on side headers (**Figure 4-3**).


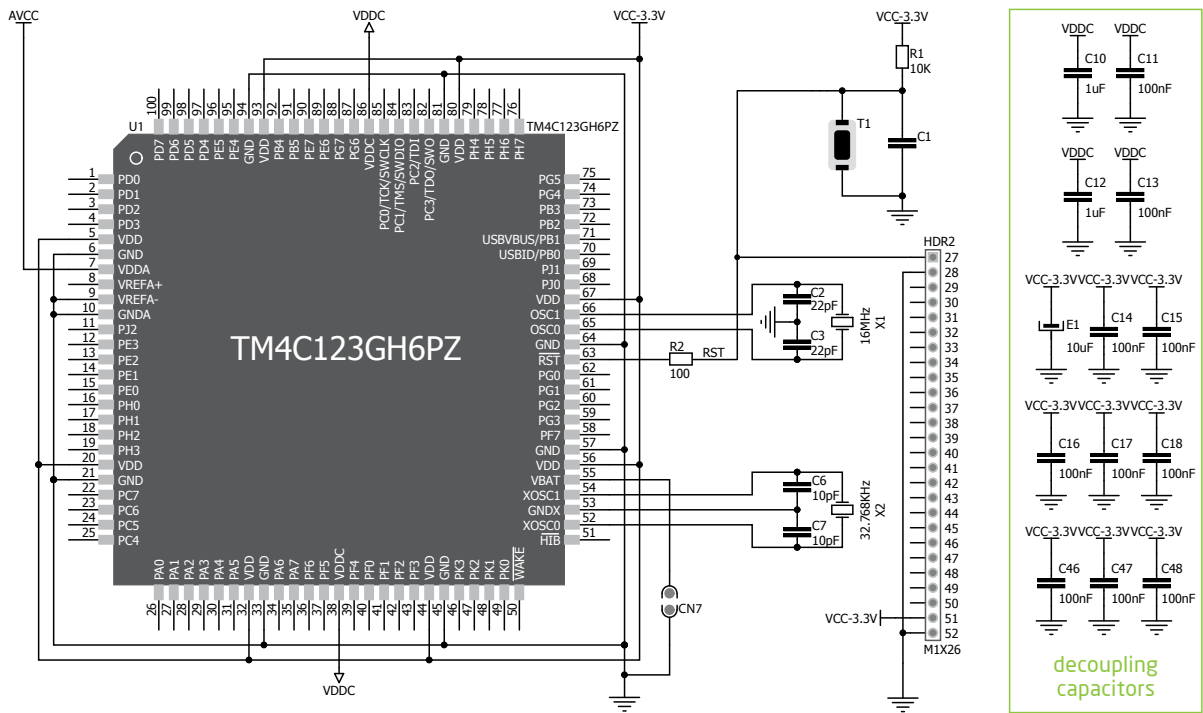


Figure 4-3: Reset circuit schematic

# 5. Crystal oscillator



Figure 5-1:  
16MHz crystal  
oscillator

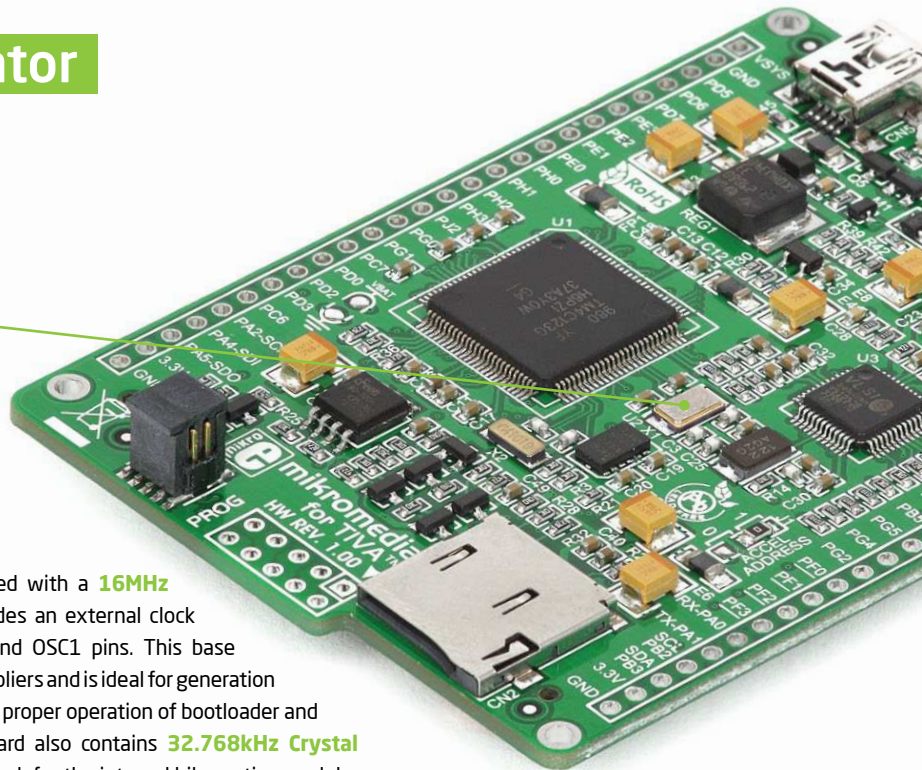

mikromedia for Tiva™ C Series is equipped with a **16MHz crystal oscillator (X1)** circuit that provides an external clock waveform to the microcontroller OSC0 and OSC1 pins. This base frequency is suitable for further clock multipliers and is ideal for generation of the necessary USB clock, which ensures proper operation of bootloader and your custom USB-based applications. Board also contains **32.768kHz Crystal oscillator (X2)** which provides external clock for the internal hibernation module.

**NOTE:** The use of crystal in all other schematics is implied even if it is purposely left out, because of the schematics clarity.

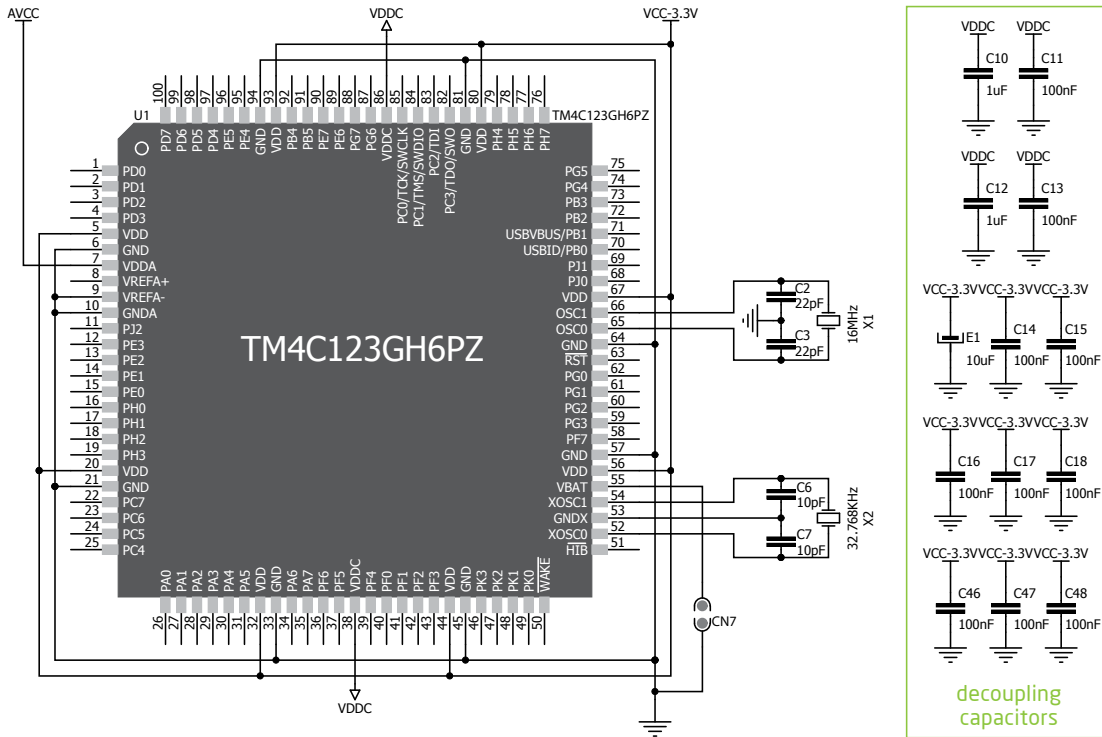


Figure 5-2: Crystal oscillator schematic

## 6. microSD Card Slot

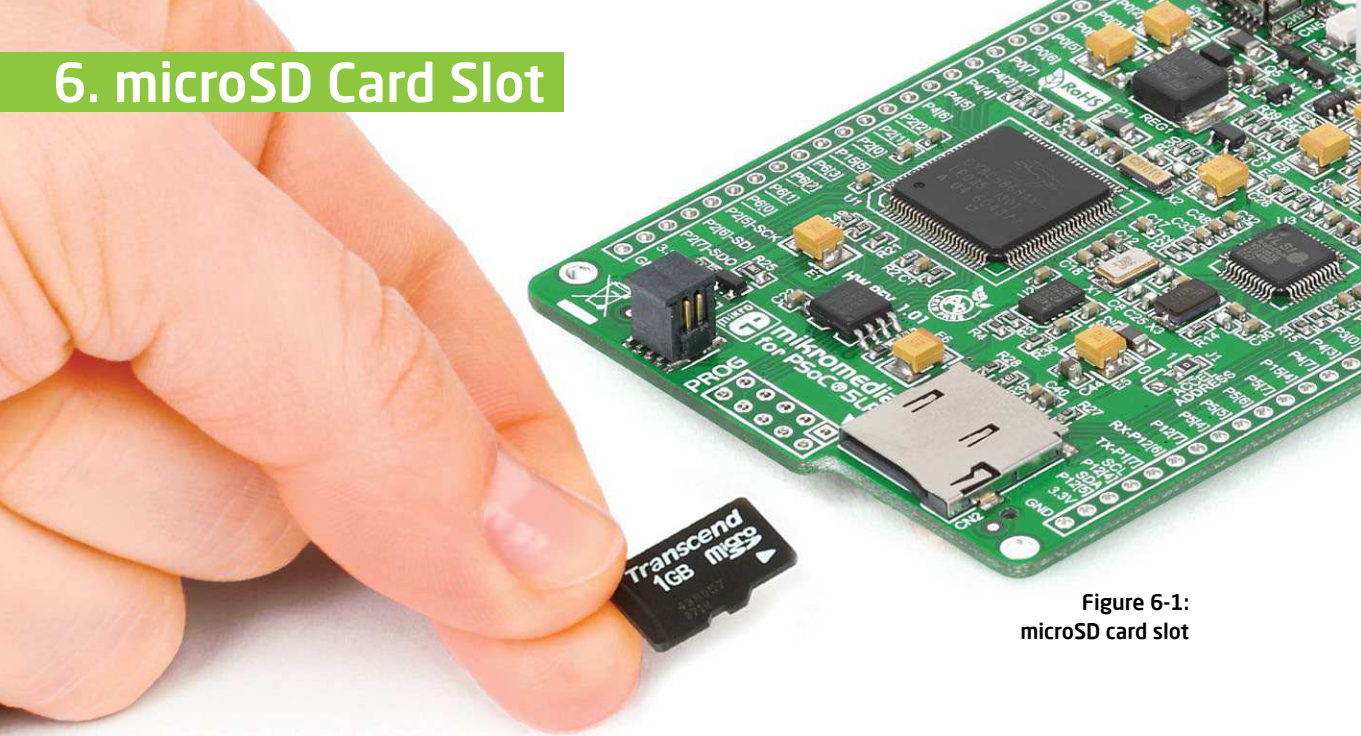


Figure 6-1:  
microSD card slot

mikromedia for Tiva™ C Series contains a **microSD card slot** for using microSD cards in your projects. It enables you to store large amounts of data externally, thus saving microcontroller memory. MicroSD cards use Serial Peripheral Interface (**SPI**) for communication with the microcontroller.


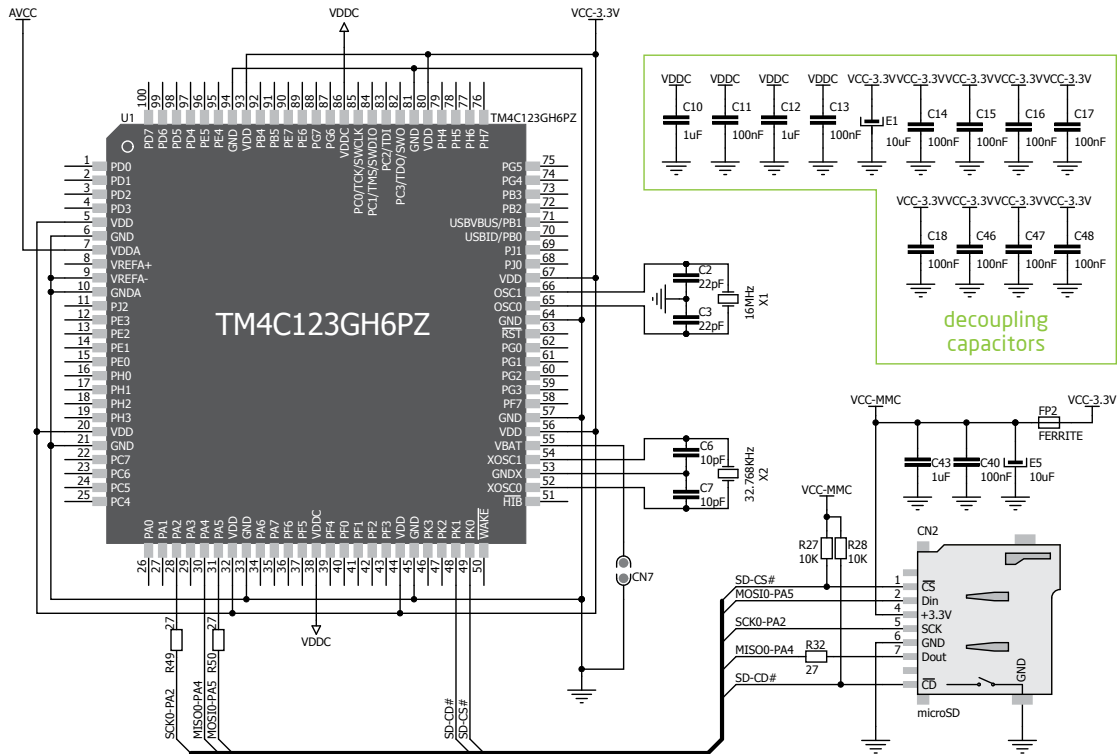


Figure 6-2: microSD Card Slot module connection schematic



## 7. Touch Screen

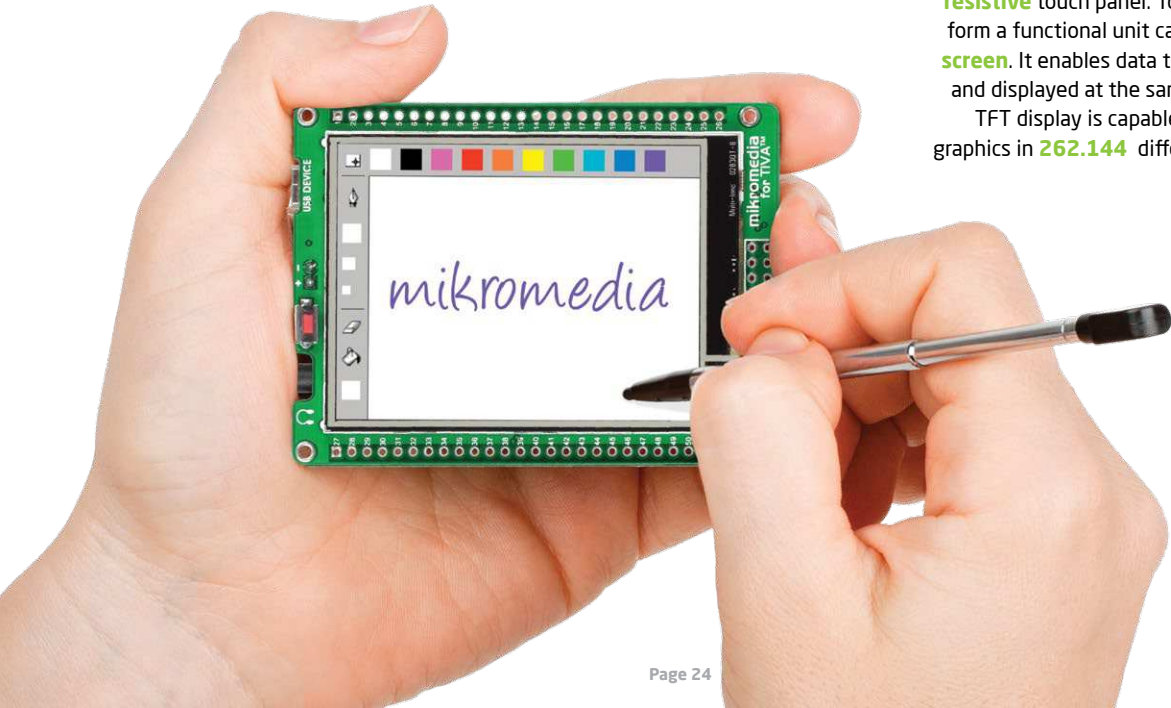

The development system features a **TFT 320x240 display** covered with a **resistive** touch panel. Together they form a functional unit called a **touch screen**. It enables data to be entered and displayed at the same time. The TFT display is capable of showing graphics in **262.144** different **colors**.

**Figure 7-1**  
**Touch Screen**

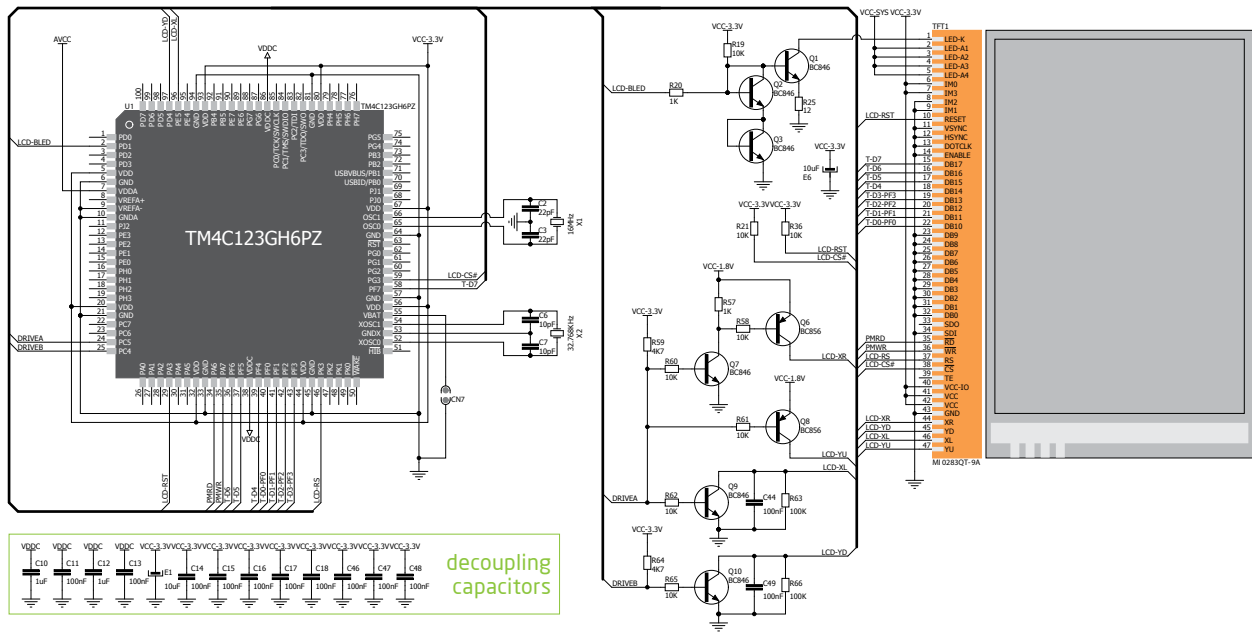


Figure 7-2: Touch Screen connection schematic