



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us


Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China






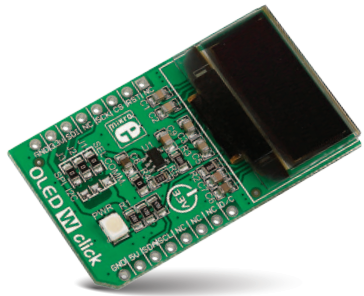

## OLED W click™


### 1. Introduction

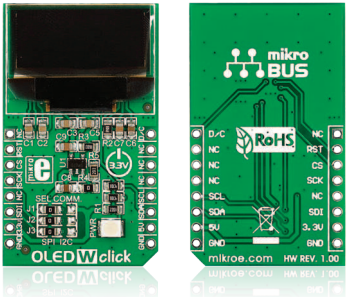


OLED W click™ lets you add a small but bright and crisp display to your design. It carries a white monochrome passive matrix OLED display and a **SSD1306** IC to control it. OLED W click™ can communicate with the target board either through SPI or I<sup>2</sup>C interfaces. **mikroBUS™** lines used for SPI are CS, SCK, and MOSI (SDI); I<sup>2</sup>C output uses SCL and SDA lines; also, both modes use PWM (A/C) and RST lines. You select between SPI and I<sup>2</sup>C outputs by resoldering three jumpers. OLED W click™ uses a 3.3V power supply.

### 2. Soldering the headers

Before using your click™ board, make sure to solder 1x8 male headers to both left and right side of the board. Two 1x8 male headers are included with the board in the package.

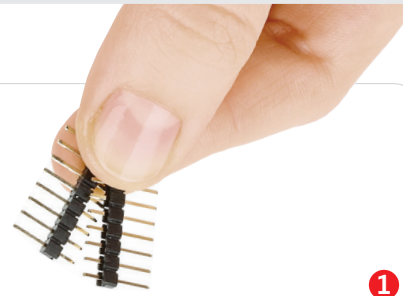


2

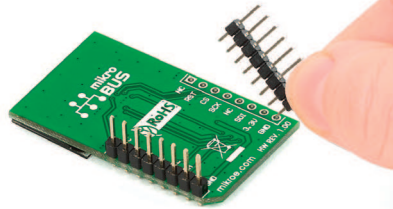

Turn the board upside down so that the bottom side is facing you upwards. Place shorter pins of the header into the appropriate soldering pads.



3

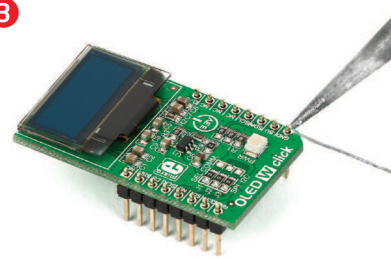

Turn the board upward again. Make sure to align the headers so that they are perpendicular to the board, then solder the pins carefully.

### 3. Plugging the board in

Once you have soldered the headers your board is ready to be placed into the desired mikroBUS™ socket. Make sure to align the cut in the lower-right part of the board with the markings on the silkscreen at the mikroBUS™ socket. If all the pins are aligned correctly, push the board all the way into the socket.

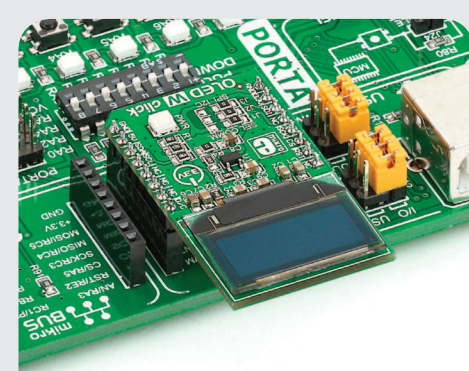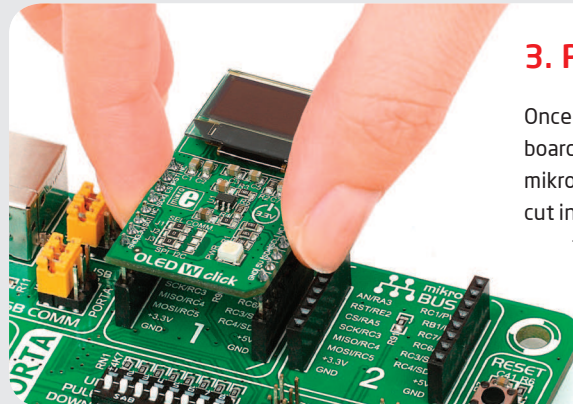

### 4. Essential features

OLED displays are made from a thin film of organic compound that emits light when exposed to a current. Small monochrome displays like these are ideal for displaying text or icons. They are bright, have a wide viewing angle and low power consumption. The display on OLED W click™ is 19.3 x 7.8mm with a 96 x 39px resolution. The SSD1306 controller has built-in functionalities like contrast control, normal or inverse image display, vertical and horizontal scrolling functions and many more.

click™  
BOARD  
www.mikroe.com

OLED W click Manual v1.00



