



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




DC MOTOR 3 click

DC MOTOR 3 click

	
DC MOTOR 3 click	
IC/Module	TB6549FG ^[1]
Interface	PWM, IN1, IN2, SLP
Power supply	3.3V
Website	www.mikroe.com/click/dc-motor-3 ^[2]

DC Motor 3 click is a mikroBUS™ add-on board with a Toshiba **TB6549FG** full-bridge driver for direct current motors. The IC is capable of outputting currents of up to 4.5 A with 30V, making it suitable for high-power motors.

Features and usage notes

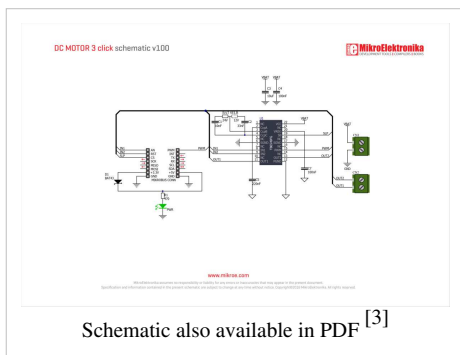

Two pairs of screw terminals are positioned on the top of the board. One is for bringing an external power supply; the other is for connecting a motor.

TB6549FG has four operating modes: clockwise, counter-clockwise, short brake and stop. The operating mode is configured through IN1 and IN2 pins. A separately controlled standby mode is also available.

For safety, the TB6549FG IC incorporates overcurrent protection and a thermal shutdown circuit.

The click communicates with the target MCU through the mikroBUS™ PWM pin, with additional functionality provided by IN1, IN2 and SLP pins (in place of default mikroBUS™ AN, RST and CS pins). Designed to use a 3.3 power supply only.

Summary of TB6549FG specifications:

- Power supply voltage: 30 V (max)
- Output current: 3.5 A (max) (FG,PG type)
- Low ON-resistance: 1.0 Ω (up + low/typ.)
- PWM control capability

- Standby system
- Function modes: CW/CCW/short brake/stop
- Built-in overcurrent protection
- Built-in thermal shutdown circuit

Programming

This example shows how to setup the DC Motor 3 on ARM, and use buttons to turn the motor, as well as speed up or slow down the motor.

```
#include "dc_motor3.h"

unsigned int current_duty;
unsigned int pwm_period;

sbit SLP at GPIOD_ODR.B14;
sbit IN2 at GPIOC_ODR.B3;
sbit IN1 at GPIOA_ODR.B5;

void main()
{
    GPIO_Digital_Input (&GPIOE_BASE, _GPIO_PINMASK_8 | _GPIO_PINMASK_9 |
    _GPIO_PINMASK_10 | _GPIO_PINMASK_11 | _GPIO_PINMASK_12); // configure
    PORTE pins as input

    GPIO_Digital_Output (&GPIOD_BASE, _GPIO_PINMASK_14 );
    GPIO_Digital_Output (&GPIOC_BASE, _GPIO_PINMASK_3 );
    GPIO_Digital_Output (&GPIOA_BASE, _GPIO_PINMASK_5 );

    current_duty = 40000; // initial value for
    current_duty
    pwm_period = PWM_TIM4_Init(5000);

    PWM_TIM4_Set_Duty(current_duty, _PWM_NON_INVERTED, _PWM_CHANNEL1);
    // Set current duty for PWM_TIM1
    PWM_TIM4_Start(_PWM_CHANNEL1, &_GPIO_MODULE_TIM4_CH1_PD12);

    while(1)
    {
        if (Button(&GPIOE_IDR, 8, 50, 1))
        {
            dc_motor3_clockwise();
        }

        if (Button(&GPIOE_IDR, 9, 50, 1))
        {
```

```
        dc_motor3_counter_clockwise();
    }

    if (Button(&GPIOE_IDR, 10, 50, 1))
    {

        Delay_ms(1);
        current_duty *= 2;
        PWM_TIM4_Set_Duty(current_duty, _PWM_NON_INVERTED,
_PWM_CHANNEL1);
    }

    if (Button(&GPIOE_IDR, 11, 50, 1))
    {

        Delay_ms(1);
        current_duty /= 2;
        PWM_TIM4_Set_Duty(current_duty, _PWM_NON_INVERTED,
_PWM_CHANNEL1);
    }

    if (Button(&GPIOE_IDR, 12, 50, 1))
    {

        dc_motor3_stop();
    }
    Delay_ms(1);
}
}
```

Code examples for DC MOTOR 3 click are available for ARM and AVR compilers. Download them from Libstock [4].

Resources

- DC Motor 3 click Libstock example [4]
- Vendor's data sheet [1]
- mikroBUS™ standard specifications [5]

References

- [1] <http://toshiba.semicon-storage.com/ap-en/product/linear/motordriver/detail.TB6549FG.html>
- [2] <http://www.mikroe.com/click/dc-motor-3>
- [3] <http://cdn-docs.mikroe.com/images/9/98/Dc-motor-3-click-schematic.pdf>
- [4] <http://libstock.mikroe.com/projects/view/1904/dc-motor-3-click>
- [5] <http://download.mikroe.com/documents/standards/mikrobus/mikrobus-standard-specification-v200.pdf>

Article Sources and Contributors

DC MOTOR 3 click *Source:* <http://docs.mikroe.com/index.php?oldid=743> *Contributors:* Srdjan.misic

Image Sources, Licenses and Contributors

File:DC MOTOR 3 click.jpg *Source:* http://docs.mikroe.com/index.php?title=File:DC_MOTOR_3_click.jpg *License:* unknown *Contributors:* Srdjan.misic

File:Dc-motor-3-click-schematic.png *Source:* <http://docs.mikroe.com/index.php?title=File:Dc-motor-3-click-schematic.png> *License:* unknown *Contributors:* Srdjan.misic

License

Creative Commons Attribution
<https://creativecommons.org/licenses/by/4.0/>
