



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




SHT click

From MikroElektronika Documentation

SHT click is a temperature and humidity sensing click board that carries Sensirion's SHT3x IC. Compared to its predecessor (SHT11), SHT3x click has increased reliability and enhanced signal processing features with a high signal-to-noise ratio. Best measurement results are achieved within a 5-60° C temperature range (0.015 resolution) and a 20%–80%RH humidity range (0.01 resolution). SHT click outputs a fully calibrated, linearized, and temperature compensated digital output through the mikroBUS™ I2C interface (SCL, SDA). An additional INT pin is for setting up alerts for certain temperature or humidity values. Finally, aN RST pin allows you to reset the sensor. Designed to use either 3.3V or 5V power supply.

Features and usage notes

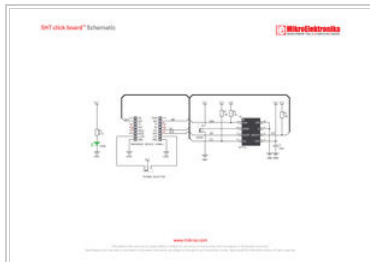

Schematic also available in PDF (http://cdn-docs.mikroe.com/images/d/d5/Sht_click_board_sche)

state by itself.

Also note that prolonged exposure to extreme conditions may accelerate ageing.

Programming

The following code snippet shows how to send temperature readings from SHT click to a TFT display. The brevity of the code illustrates the simplicity of implementing SHT3x into your design.

```

1 void display_temp()
2 {
3     temperature = sht_temp_ss();
4     Delay_ms( 200 );
5     sprintf( tmp_txt, "%3.1f C", temperature );
6     TFT_Rectangle( 195, 95, 250, 120 );
7     TFT_Write_Text( tmp_txt, 200, 100 );
8 }

```


Code examples that demonstrate the usage of SHT click with MikroElektronika hardware, written for mikroC for ARM, AVR, dsPIC, FT90x, PIC and PIC32 are available on Libstock (<http://libstock.mikroe.com/projects/view/1777/sht-click>).

Resources

- learn.mikroe.com tutorial about SHT click (<http://learn.mikroe.com/leader-humidity-measurement-sht/>)
- Sensirion SHT3x page (<https://www.sensirion.com/products/digital-humidity-sensors-for-reliable-measurements/digital-humidity-sensors-for-various-applications/>)
- Sensirion SHT3x Data Sheet (https://www.sensirion.com/fileadmin/user_upload/customers/sensirion/Dokumente/Humidity_Sensors/Sensirion_Humidity_Sensors_SHT3x_Datasheet_digital.pdf)
- Sensirion SHT3x Application notes (https://www.sensirion.com/fileadmin/user_upload/customers/sensirion/Dokumente/Humidity_Sensors/Sensirion_Humidity_Sensors_SHT3x_Application_Note_Alert_Mode_)
- SHT click examples on Libstock (<http://libstock.mikroe.com/projects/view/1777/sht-click>)
- mikroBUS standard specifications (<http://download.mikroe.com/documents/standards/mikrobus/mikrobus-standard-specification-v200.pdf>)

Retrieved from "http://docs.mikroe.com/index.php?title=SHT_click&oldid=254"

SHT click

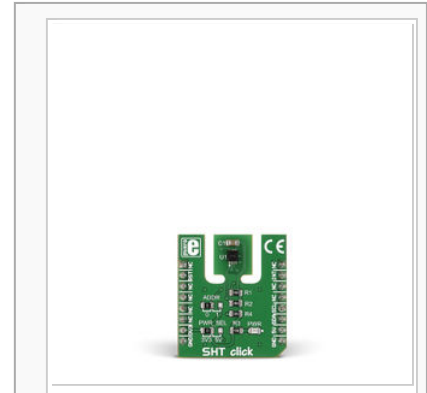

SHT click

IC/Module	Sensirion SHT3x (https://www.sensirion.com/products/digital-humidity-sensors-for-reliable-measurements/digital-humidity-sensors-for-various-applications/)
Interface	I2C (SCL, SDA), INT, RST
Power supply	3.3V, 5V
Website	www.mikroe.com/click/sht (http://www.mikroe.com/click/sht)

- This page was last modified on 6 May 2016, at 19:35.
- Content is available under Creative Commons Attribution unless otherwise noted.