



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Sealing frame - CES-B16-SFFS-PLBK - 0801659

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Sealing frame with screw locking, size B16, with flat gasket, for 8 small sleeves

Product Description

Including flat gasket; mounting screws not supplied as standard



Key Commercial Data

| | |
|--------------------------------------|----------|
| Packing unit | 1 pc |
| Weight per Piece (excluding packing) | 140.0 g |
| Custom tariff number | 85472000 |
| Country of origin | Poland |

Technical data

Dimensions

| | |
|--------|---------|
| Length | 120 mm |
| Width | 58.5 mm |
| Height | 20 mm |

Ambient conditions

| | |
|---------------------------------|-------------------|
| Ambient temperature (operation) | -40 °C ... 120 °C |
|---------------------------------|-------------------|

General

| | |
|--|---|
| Product description | Including flat gasket; mounting screws not supplied as standard |
| Frame type | Sealing frame |
| Material | PA |
| Flammability rating according to UL 94 | V0 |
| Color | black |
| Torque | 2 Nm ... 4 Nm (Locking screw) |

Sealing frame - CES-B16-SFFS-PLBK - 0801659

Technical data

General

| | |
|---------------------------|---|
| Installation instructions | M4 locking screw with 3 mm Allen screw head, 2 ... 4 Nm torque, 1 large sleeve requires the space of 4 small sleeves, mounting screw: M4 (ISO 4762/DIN 912), 1.8 Nm torque |
| | Leak-tightness is guaranteed with underwall and perpendicular mounting; the flat gasket should be inserted between the wall and the sealing frame in the case of wall mounting. |

Standards and Regulations

| | |
|--|-----|
| Connection in acc. with standard | CUL |
| Flammability rating according to UL 94 | V0 |

Classifications

eCl@ss

| | |
|------------|----------|
| eCl@ss 4.0 | 23110102 |
| eCl@ss 4.1 | 23110102 |
| eCl@ss 5.0 | 23110102 |
| eCl@ss 5.1 | 23110102 |
| eCl@ss 6.0 | 23110102 |
| eCl@ss 7.0 | 23110102 |
| eCl@ss 8.0 | 27142421 |

ETIM

| | |
|----------|----------|
| ETIM 3.0 | EC001121 |
| ETIM 4.0 | EC002498 |
| ETIM 5.0 | EC000211 |

UNSPSC

| | |
|---------------|----------|
| UNSPSC 6.01 | 27113201 |
| UNSPSC 7.0901 | 27113201 |
| UNSPSC 11 | 27113201 |
| UNSPSC 12.01 | 27113201 |
| UNSPSC 13.2 | 27113201 |

Approvals

Approvals

Approvals

UL Recognized / cUL Recognized / GL / cULus Recognized

Sealing frame - CES-B16-SFFS-PLBK - 0801659

Approvals

Ex Approvals

Approvals submitted

Approval details

UL Recognized


cUL Recognized

GL

cULus Recognized


Drawings

Dimensional drawing

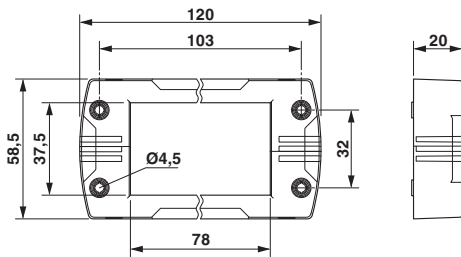

Dimensional drawing

Dimensional drawing



Panel cutout