



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



## DC to 45 GHz MMIC Amplifier

### Features

- 22 dBm Psat (8.5V p-p)
- Dynamic Gain Control
- 10 dB Gain
- Low Noise Figure (5 dB)
- Flatness  $\pm 1$  dB to 40 GHz
- >18 dBm Pout @ >7 dB Gain @ 45 GHz
- Size: 1640 x 835  $\mu$ m
- ECCN 3A001.b.2.d

### Description

The MMA031AA is an eight stage medium power broadband Traveling Wave Amplifier. The amplifier has been designed for excellent return loss and flat gain to 45 GHz. By using external components the bandwidth of operation can be extended to frequencies below 100 kHz. A bonding pad is provided for dynamic gain control.

### Application

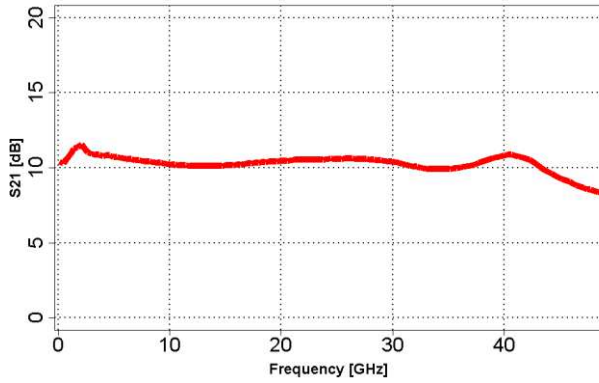
The MMA031AA MMIC Amplifier is designed for broadband applications in communications, test equipment and military systems. The amplifier can be used as a gain block featuring 10 dB of gain to 45 GHz.

**Key Characteristics:** Vdd=8.0V, Idd=250 mA, Zo=50 $\Omega$

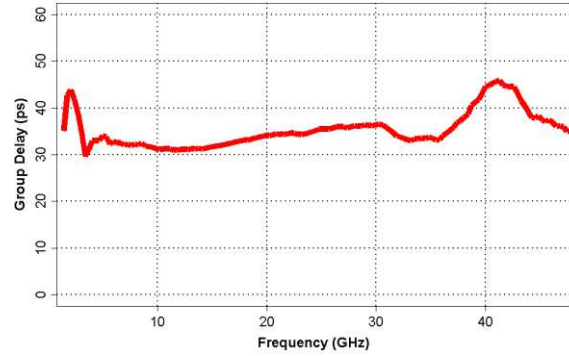
Specifications pertain to wafer measurements with RF probes and DC bias cards @ 25°C

Parameter	Description	40MHz - 40GHz			40MHz - 45GHz		
		Min	Typ	Max	Min	Typ	Max
S21 (dB)	Small Signal Gain	9	10.5	-	9	10	-
Flatness ( $\pm$ dB)	Gain Flatness	-	1.0	1.5	-	1.0	1.5
S11 (dB)	Input Match	-	-14	-11	-	-13	-10
S22 (dB)	Output Match	-	-15	-12	-	-12	-9
S12 (dB)	Reverse Isolation	-	-26	-23	-	-26	-22
P1dB (dBm)	1dB Compressed Output Power	-	16.5	-	-	15.5	-
Psat (dBm)	Saturated Output Power	-	22	-	-	21	-
Pdc (W)	DC Power Dissipated	-	2.0	-	-	2.0	-
Pout @7dB (dBm)	Output Power @ 7dB Gain	-	-	-	18	21	-
NF (dB)	Noise Figure	-	5.0	-	-	9	-

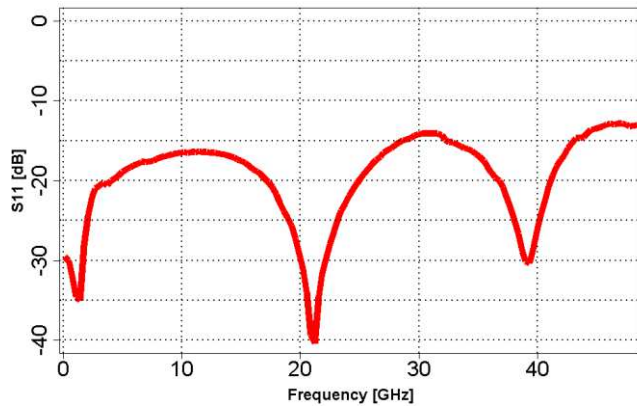
## Supplemental Specifications

**S21**


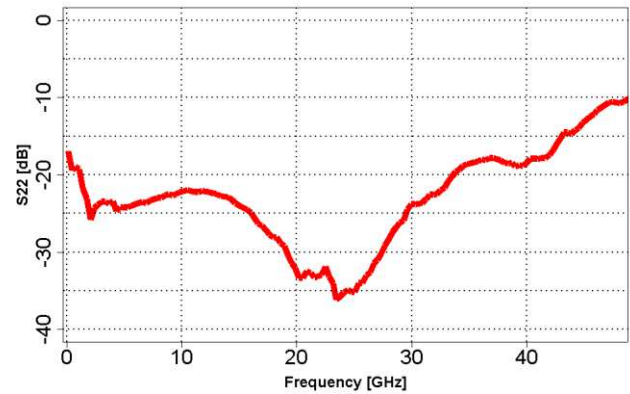
Typical on wafer measured performance. Bias:  $V_d=8V$ ;  $I_d=250\text{ mA}$

**Group Delay**


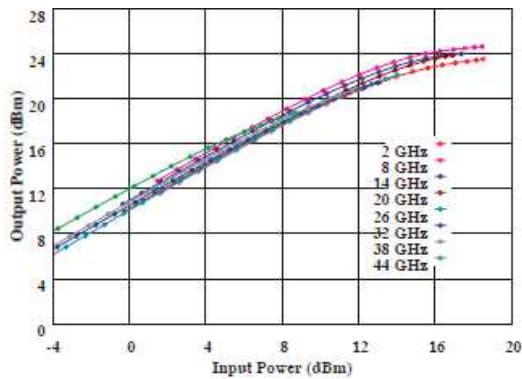
Typical on wafer measured performance. Bias:  $V_d=8V$ ;  $I_d=250\text{ mA}$

**S11**


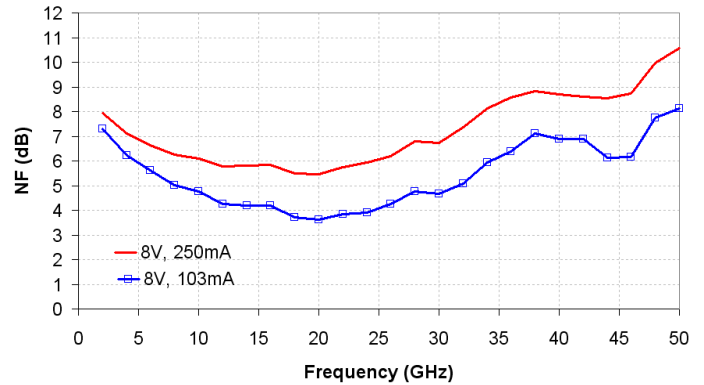
Typical on wafer measured performance. Bias:  $V_d=8V$ ;  $I_d=250\text{ mA}$

**S22**


Typical on wafer measured performance. Bias:  $V_d=8V$ ;  $I_d=250\text{ mA}$

**Power Measurement**


Typical on wafer measured performance. Bias:  $V_d=8V$ ;  $I_d=250\text{ mA}$

**Noise Figure**


Typical IC performance with package de-embedded  
Bias:  $V_d=8V$ ;  $I_d=250\text{ mA}$

**Table 1: Supplemental Specifications**

Parameter	Description	Min	Typ	Max
Vdd	Drain Bias Voltage	-	8V	-
Idd	Drain Bias Current	-	250mA	250mA
Vg1	1st Gate Bias Voltage	-4V	-	0V
Vg2	2nd Gate Bias Voltage	-4V	N/C	4V
P <sub>in</sub>	Input Power (CW)	-	-	20 dBm
P <sub>dc</sub>	Power Dissipation	-	2.0W	-
T <sub>ch</sub>	Channel Temperature	-	-	150°C
Θ <sub>ch</sub>	Thermal Resistance (T <sub>case</sub> =85°C)	-	20° C/W	-

### DC Bias:

The MMA031AA is biased using a positive voltage on the drain (Vdd), and by setting the drain current (Idd) using a negative voltage on the gate (Vgg). When zero volts is applied to the gate the drain to source channel is open which results in high I<sub>ds</sub>. When Vgg is negative the drain to source channel is pinched off and I<sub>ds</sub> is lowered with increasing negative voltage. Applications using high Vdd may need to apply Vgg before Vdd to keep power dissipation from getting too high.



Caution, ESD  
Sensitive Device

The nominal bias condition is Vdd = 8.0V, I<sub>ds</sub> = 250mA. This condition is a good starting point for most designs. Minor improvements in performance and efficiency are possible depending on the application. The drain bias voltage range is 3V to 8V.

### Gain Control:

Negative voltage applied to the Vgc pad reduces amplifier gain. Dynamic gain control is possible when operating the amplifier in the linear gain region.

### Operating Design Considerations:

The MMA031AA has been designed so that the bandwidth can be extended to low frequencies. The low frequency limit and performance is a function of external circuitry.

### Matching:

The amplifier incorporates on chip termination resistors for RF input and output. These resistors are RF grounded through on-chip capacitors, which are small and become open circuits at frequencies below 1 GHz. Bonding pads have been provided for connecting external RF grounding capacitors used in the low frequency extension network.

### DC Blocks:

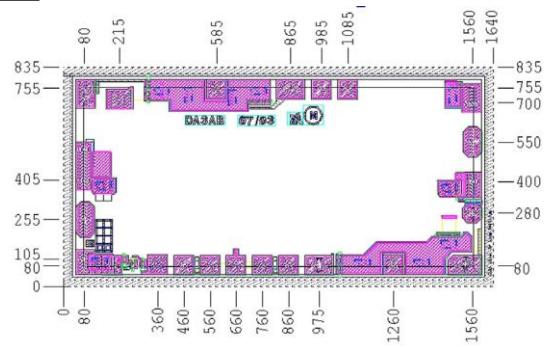
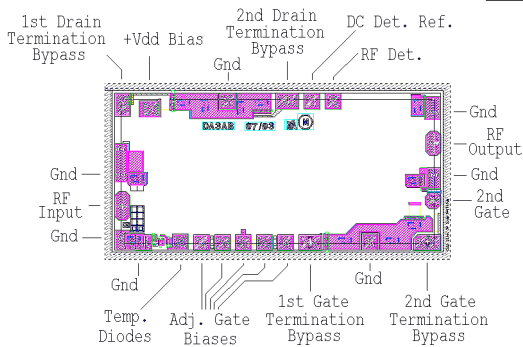
The amplifier is DC coupled on the RFin and RFout ports therefore DC appearing on these ports must be isolated from external circuitry.

### Bias Inductor:

DC bias, Vdd, must be decoupled down to the lowest operating frequency and is applied directly to the RF output path through a biasing inductor. Inductive biasing may be applied to the on chip Vdd pad or through the RFout port.

### Die size, pad locations, and pad descriptions

Chip size: 1640 x 835 mm  
 Chip size tolerance:  $\pm 5$  mm  
 Chip thickness:  $100 \pm 10$  mm  
 Pad dimensions: 80 x 80 mm



#### Pick-up and Chip Handling:

This MMIC has exposed air bridges on the top surface. **Do not pick up chip with vacuum on the die center;** handle from edges or use a collet.

#### Thermal Heat Sinking:

To avoid damage and for optimum performance, you must observe the maximum channel temperature and ensure adequate heat sinking.

#### ESD Handling and Bonding:

**This MMIC is ESD sensitive;** preventive measures should be taken during handling, die attach, and bonding.

**Epoxy die attach is recommended.** Please review our application note MM-APP-0001 handling and die attach recommendations, on our website for more handling, die attach and bonding information.

---

Information contained in this document is proprietary to Microsem. This document may not be modified in any way without the express written consent of Microsemi. Product processing does not necessarily include testing of all parameters. Microsemi reserves the right to change the configuration and performance of the product and to discontinue product at any time.

---

**Microsemi Corporate Headquarters**

One Enterprise, Aliso Viejo CA 92656 USA  
Within the USA: +1 (949) 380-6100  
Sales: +1 (949) 380-6136  
Fax: +1 (949) 215-4996

Microsemi Corporation (Nasdaq: MSCC) offers a comprehensive portfolio of semiconductor and system solutions for communications, defense and security, aerospace, and industrial markets. Products include high-performance and radiation-hardened analog mixed-signal integrated circuits, FPGAs, SoCs, and ASICs; power management products; timing and synchronization devices and precise time solutions, setting the world's standard for time; voice processing devices; RF solutions; discrete components; security technologies and scalable anti-tamper products; Power-over-Ethernet ICs and midspans; as well as custom design capabilities and services. Microsemi is headquartered in Aliso Viejo, Calif. and has approximately 3,400 employees globally. Learn more at [www.microsemi.com](http://www.microsemi.com).

---

© 2014 Microsemi Corporation. All rights reserved. Microsemi and the Microsemi logo are trademarks of Microsemi Corporation. All other trademarks and service marks are the property of their respective owners.