



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



# MSWSE-040-10

## PIN Diode Series Switch Element

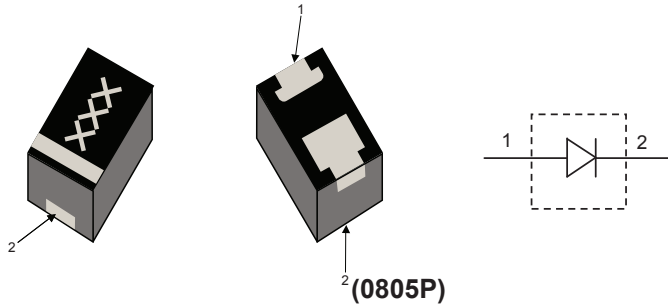

### Description

A broadband, high linearity, medium power series switch element in a 2.0 X 1.3 mm QFN package. This device is designed for WiMax, Wibro, WLAN, TD-SCDMA and other wireless infrastructure applications. It is also suited for 0.1 ~ 3 GHz applications with up to 40 watts of power.

### Features

- Supports up to 40 watts power when cold switched
- Low Insertion Loss 0.25 dB typical up to 2.7 GHz
- Medium Isolation 11 dB typical up to 2.7 GHz

### Electrical Specifications, $T_A = +25\text{ }^\circ\text{C}$

SYMBOL	TEST CONDITIONS		MIN	TYPICAL	MAX	UNITS
$V_{BR}$	$I_R = 10\ \mu\text{A}$		250	-	-	V
$V_F$	$I_F = 50\ \text{mA}$		-	900	-	mV
$C_J$	$V_R = 50\ \text{V}$	$F = 1\ \text{MHz}$	-	0.12	-	pF
$R_S$	$I_F = 10\ \text{mA}$	$F = 500\ \text{MHz}$	-	2.0	-	$\Omega$
$R_S$	$I_F = 50\ \text{mA}$	$F = 500\ \text{MHz}$	-	0.6	1.4	$\Omega$
$\tau$	$I_F = 10\ \text{mA}$	$I_R = 6\ \text{mA}\ 50\%$	-	700	-	nsec
W	I - Layer		-	40	-	$\mu\text{m}$
IL	$I_F = 50\ \text{mA}$	$F = 2.025\ \text{GHz}$	-	0.12	0.20	dB
		$F = 2.3 \sim 2.7\ \text{GHz}$	-	0.25	0.35	dB
IRL	$I_F = 50\ \text{mA}$	$F = 2.025\ \text{GHz}$	15	25	-	dB
		$F = 2.3 \sim 2.7\ \text{GHz}$	15	20	-	dB
Iso	$V_R = 10\ \text{V}$	$F = 2.025\ \text{GHz}$	10	14	-	dB
		$F = 2.3 \sim 2.7\ \text{GHz}$	9	11	-	dB


### Absolute Maximum Ratings

RATING	LIMITS	UNITS
$V_R$	250	V
$I_F$	100	mA
$\theta_{JC}$	20	$^\circ\text{C/W}$
$T_J$	+175	$^\circ\text{C}$
$T_{STG}$	-65 to +150	$^\circ\text{C}$
$T_{SOLDER}$	+260 $^\circ\text{C}$ per JEDEC J-STD-20C	




Typical RF Performance at  $T_A = 25\text{ }^\circ\text{C}$ ,  $Z_o = 50\text{ }\Omega$ , Small Signal  
(Unless Otherwise Specified)


### Insertion Loss

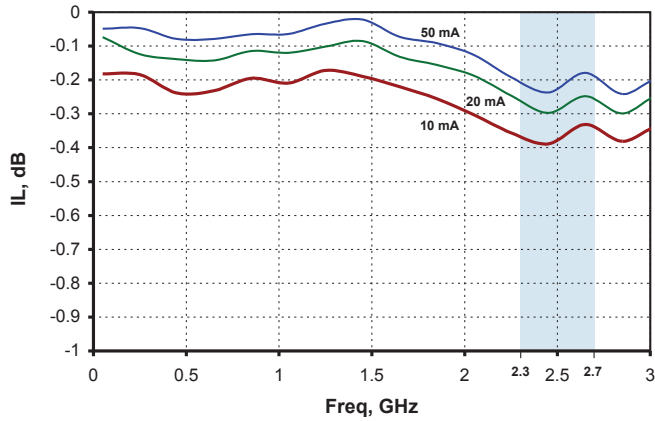

### Input Return Loss

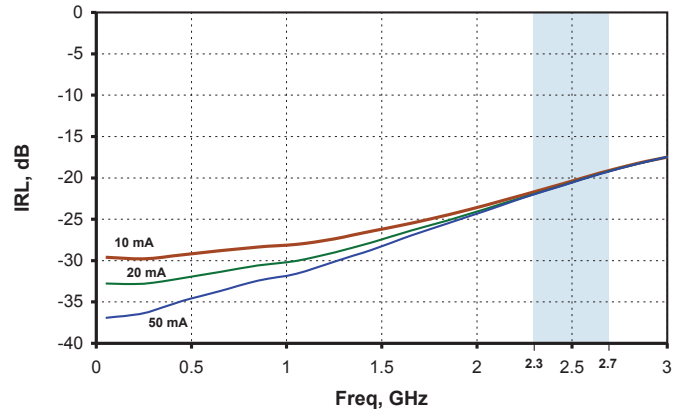


### Isolation

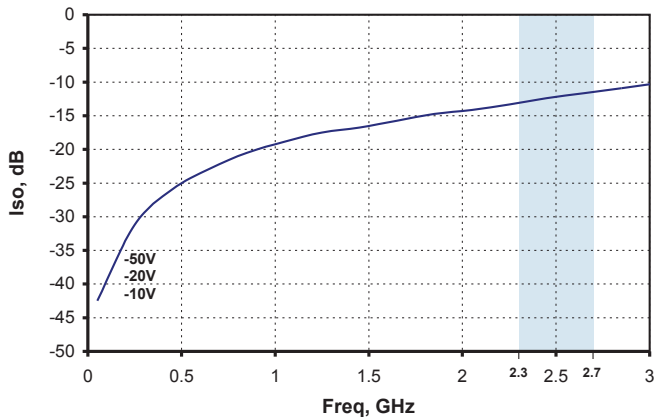


### Series Resistance vs. Current

(Freq = 500 MHz)

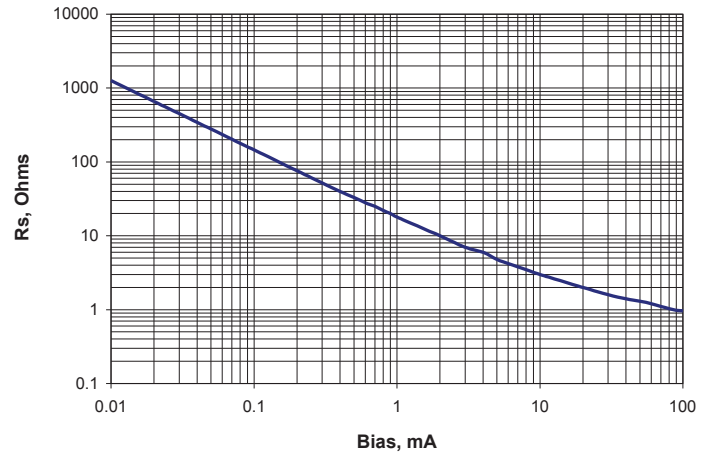


### Junction Temperature vs Power with the Backside of Board maintained @ 25°C

Board thickness 62 mils

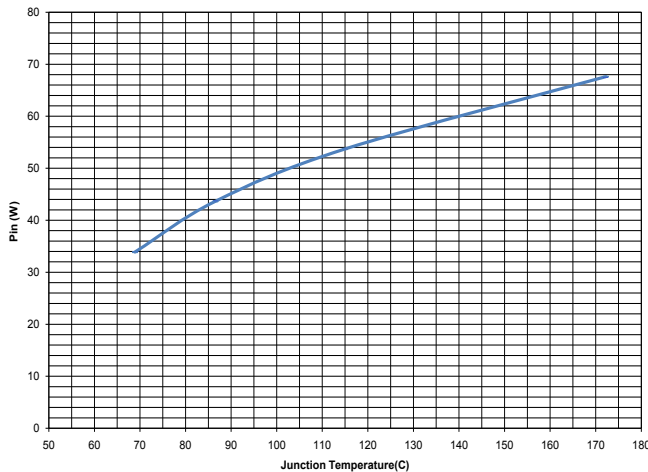

## Bias Schematic (0.1 to 3 GHz)

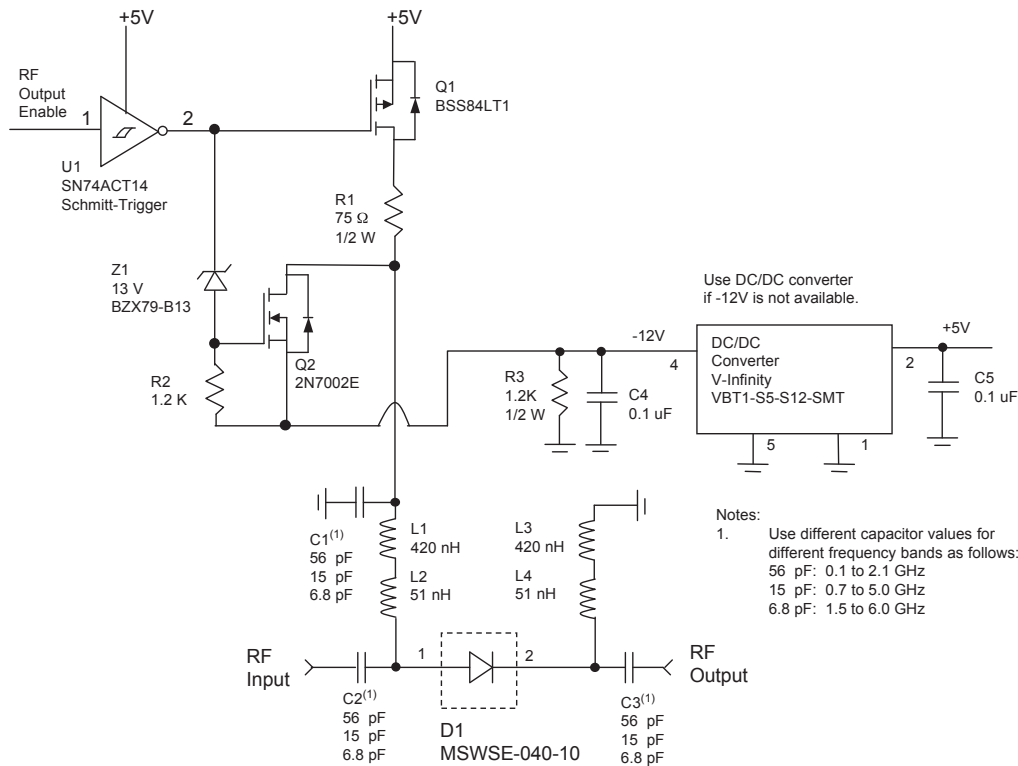

## Parts List


COMPONENT	DESCRIPTION	MANUFACTURE	P/N
R1	75Ω, 1/2W, 1210 chip resistor	KOA Speer	RK73B2ETTD750J
R2	1.2KΩ, 1/10W, 603 chip resistor	KOA Speer	RK73B1JT2D122J
R3	1.2KΩ, 1/2W, 1210 chip resistor	KOA Speer	RK73B2ETTD122J
C1,C2,C3 <sup>(1)</sup>	56pF, 250VDC Capacitor, 0603 pkg	ATC	ATC600S560JT250XT
C1,C2,C3 <sup>(1)</sup>	15pF, 250VDC Capacitor, 0603 pkg	ATC	ATC600S150JT250XT
C1,C2,C3 <sup>(1)</sup>	6.8pF, 250VDC Capacitor, 0603 pkg	ATC	ATC600S6R8JT250XT
C4,C5	0.1 uF, 50VDC Capacitor, 0805 pkg	ATC	ATC0805XR7104KT2AT
L1,L3	420nH, 340mA, 700MHz SRF Inductor	Coilcraft	0402AF-421XJLW
L2,L4	51nH, 330mA, 2.3GHz SRF, Inductor	Coilcraft	0402HP-51NXJLW
Q1	50V, 130mA, P-Channel MOSFET	ON SEMI	BSS84LT1
Q2	60V, 310mA, N-Channel MOSFET	ON SEMI	2N7002E
U1	Hex Schmitt-Trigger TTL Inverter	Texas Instruments	SN74ACT14
Z1	13V, 2%, 500mW Zener Diode	Philips	BZX79-B13
DC1	1W, 5V to 12V DC/DC Converter	V-Infinity	VBT1-S5-S12-SMT-AFM
D1	PIN Diode Series Switch in 0805 pkg	Aeroflex-Metelics	MSWSE-040-10

### Notes:

- Use different capacitor values for different frequency bands as follows:  
 56 pF: 0.1 to 2.1 GHz  
 15 pF: 0.7 to 5.0 GHz  
 6.8 pF: 1.5 to 6.0 GHz



## Package Outline (0805P) and Electrical Schematic

## PCB Layout

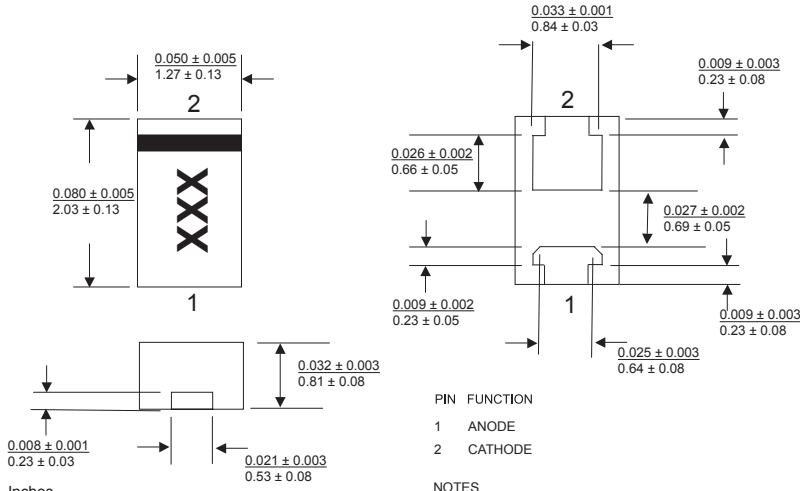

PIN FUNCTION  
 1 ANODE  
 2 CATHODE

- NOTES
1. Dimensions do not include mold flashing
  2. Burrs and dumber shall not exceed 0.002" per surface.
  3. Lead co-planarity is 0.003" max

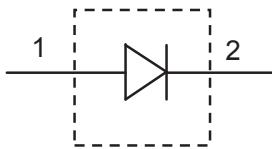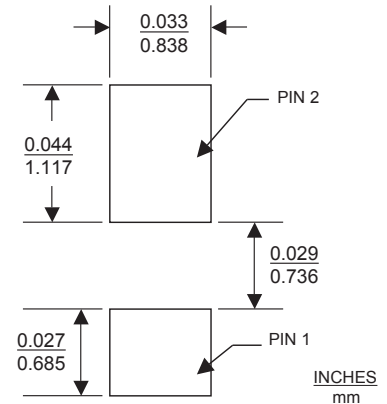

**Aeroflex / Metelics Inc.**  
 Aeroflex Microelectronic Solutions  
 975 Stewart Drive  
 Sunnyvale, CA 94085  
 TEL: 408-737-8181

54 Grenier Field Road  
 Londonderry, NH 03053  
 TEL: 603-641-3800

**Sales**  
 888-641-SEMI (7364)  
 metelics-sales@aeroflex.com

[www.aeroflex.com/Microwave](http://www.aeroflex.com/Microwave) [www.aeroflex.com/Metelics](http://www.aeroflex.com/Metelics)

Aeroflex / Metelics, Inc. reserves the right to make changes to any products and services herein at any time without notice. Consult Aeroflex or an authorized sales representative to verify that the information in this data sheet is current before using this product. Aeroflex does not assume any responsibility or liability arising out of the application or use of any product or service described herein, except as expressly agreed to in writing by Aeroflex; nor does the purchase, lease, or use of a product or service from Aeroflex convey a license under any patent rights, copyrights, trademark rights, or any other of the intellectual rights of Aeroflex or of third parties.

Copyright 2009 Aeroflex / Metelics. All rights reserved.

ISO 9001: 2008 certified companies



Our passion for performance is defined by three attributes represented by these three icons: solution-minded, performance-driven and customer-focused.