



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




## SINGLE-SUPPLY LOW POWER DUAL OPERATIONAL AMPLIFIER

### ■ GENERAL DESCRIPTION

The NJM2132 is a general purpose single supply low power dual operational amplifier.

The features of low operating current, wide and low operating voltage, high input impedance, and single supply operation are suitable for battery operated items.

### ■ PACKAGE OUTLINE



NJM2132D



NJM2132M




NJM2132V

### ■ FEATURES

- Operating Voltage ( +2.7V~+32V )
- Low Operating Current ( 180 $\mu$ A typ. @  $V^+$ =5V, each amplifier )
- Slew Rate ( 2.1V/ $\mu$ s typ. )
- Gain Bandwidth Product ( 1.8MHz typ. )
- Bipolar Technology
- Package Outline DIP8, DMP8, SSOP8

### ■ PIN CONFIGURATION




NJM2132D  
NJM2132M  
NJM2132V

#### PIN FUNCTION

- 1. A OUTPUT
- 2. A -INPUT
- 3. A +INPUT
- 4.  $V^-$
- 5. B +INPUT
- 6. B -INPUT
- 7. B OUTPUT
- 8.  $V^+$

### ■ EQUIVALENT CIRCUIT ( 1/2 Shown )

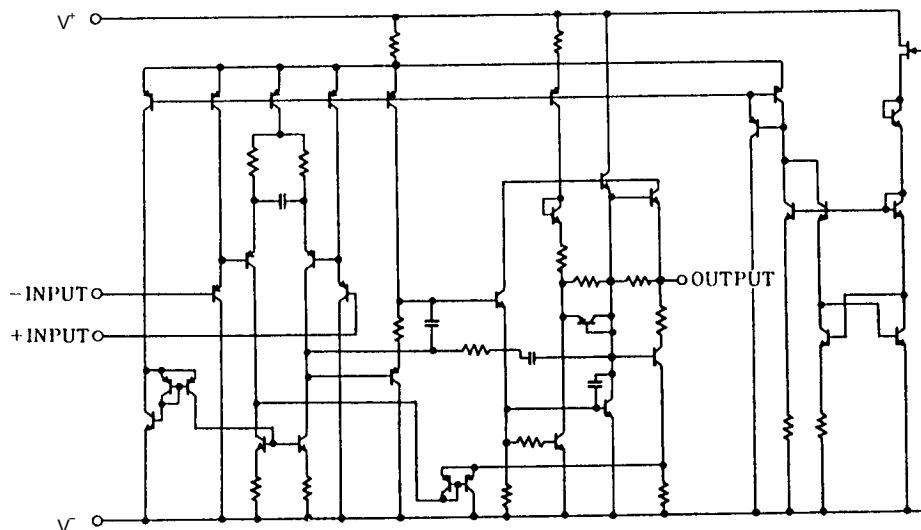

# NJM2132

## ■ ABSOLUTE MAXIMUM RATINGS

( Ta=25°C )

PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	$V^+$	36	V
Differential Input Voltage	$V_{ID}$	$\pm 36$	V
Input Voltage	$V_{IC}$	-0.3~+36 ( note )	V
Power Dissipation	$P_D$	( DIP8 ) 500 ( DMP8 ) 300 ( SSOP8 ) 250	mW
Operating Temperature Range	$T_{opr}$	-40~+85	°C
Storage Temperature Range	$T_{stg}$	-50~+125	°C





( note ) When the supply voltage is less than +36V, the absolute maximum input voltage is equal to the supply voltage.

## ■ ELECTRICAL CHARACTERISTICS




(  $V^+V^- = \pm 15V, Ta = 25^\circ C$  )

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Operating Voltage	$V^+$	Single Supply	+2.7		+32	V
Input Offset Voltage	$V_{IO}$	$R_S = 0\Omega$ $V^+ = +5V, V^- = 0V, R_S = 0\Omega$	-	2.0	4.5	mV
$V_{IO}$ Drift	$\Delta V_{IO}/T$	$R_S = 0\Omega$	-	10	-	$\mu V/^\circ C$
Input Offset Current	$I_{IO}$		-	5	20	nA
Input Bias Current	$I_B$		-	20	100	nA
Large Signal Voltage Gain	$A_V$	$R_L \geq 10k\Omega, V_O = \pm 10V$	90	100	-	dB
Input Common Mode Voltage Range	$V_{ICM}$		-15~+13.5	-	-	V
Common Mode Rejection Ratio	CMR	$R_S \leq 10k\Omega$	80	90	-	dB
Supply Voltage Rejection Ratio	SVR	$R_S = 100\Omega$	80	100	-	dB
Maximum Output Voltage Swing	$V_{OM}$ $+V_{OM}$ $-V_{OM}$	$R_L = 10k\Omega$ $V^+ = +5V, V^- = 0V$	$\pm 13.6$ 3.5	$\pm 14.2$ 4.3	-	V
Operating Current	$I_{CC}$	$R_L = \infty$ ( all Amp. ) $V^+ = +5V, V^- = 0V$	-	440	500	$\mu A$
Output Source Current	$I_{SOURCE}$	$V_{IN}^+ = 1V, V_{IN}^- = 0V$	2.2	3.6	-	mA
Output Sink Current	$I_{SINK}$	$V_{IN}^+ = 0V, V_{IN}^- = 1V$	15	27	-	mA
Input Resistance	$R_{IN}$		-	300	-	M $\Omega$
Input Capacitance	$C_i$		-	0.8	-	pF
Close Loop Output Impedance	$Z_O$	$f = 1.0MHz$	-	100	-	$\Omega$
Equivalent Input Noise Voltage	$e_n$	$R_S = 100\Omega, f = 1kHz$	-	32	-	nV/ $\sqrt{Hz}$
Slew Rate	SR	$R_L = 10k\Omega$	-	2.1	-	V/ $\mu s$
Gain Bandwidth Product	GB	$f = 100kHz$	-	1.8	-	MHz
Power Bandwidth	$BW_P$	$A_V = +1.0, R_L = 10k\Omega$ $V_O = 20V_{P-P}, THD = 5\%$	-	35	-	kHz
Phase Margin	$\theta_M$	$R_L = 10k\Omega$ $R_L = 10k\Omega, C_L = 100pF$	-	60	-	deg.
Amplitude Margin	$A_m$	$R_L = 10k\Omega$ $R_L = 10k\Omega, C_L = 100pF$	-	15	-	dB
Total Harmonic Distortion	THD	$A_V = +10, R_L = 10k\Omega$ $f = 10kHz, 2 \leq V_O \leq 20V_{P-P}$	-	0.03	-	%
Channel Separation	CS	$f = 10kHz, Input Referred$	-	120	-	dB

## ■ TYPICAL CHARACTERISTICS

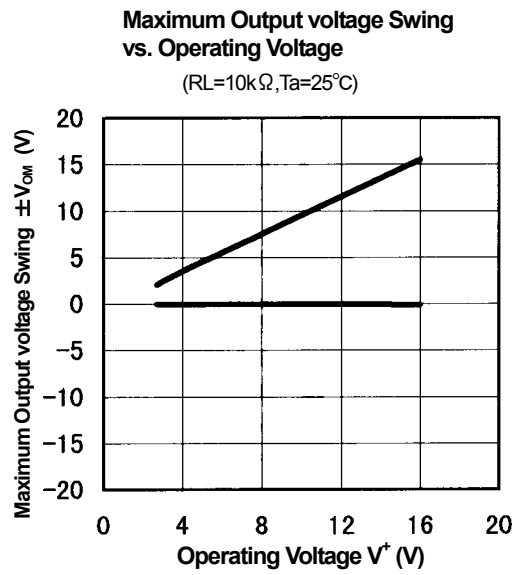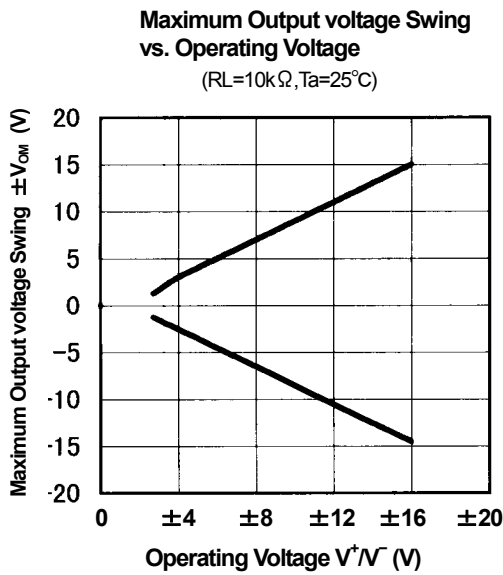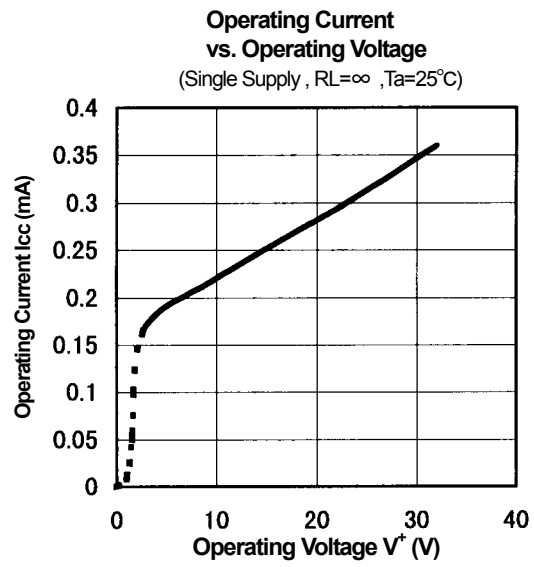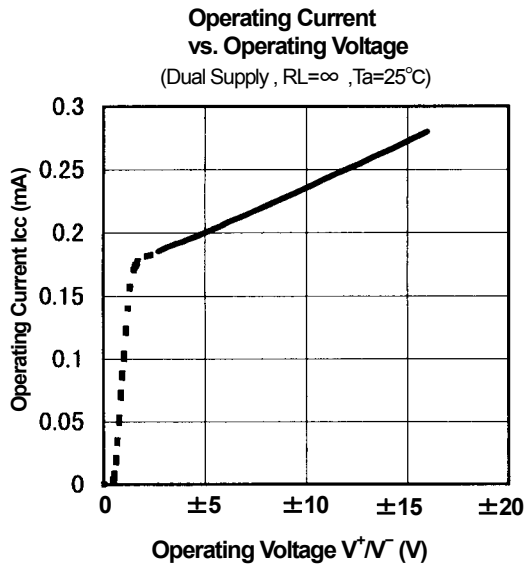

## ■ TYPICAL CHARACTERISTICS

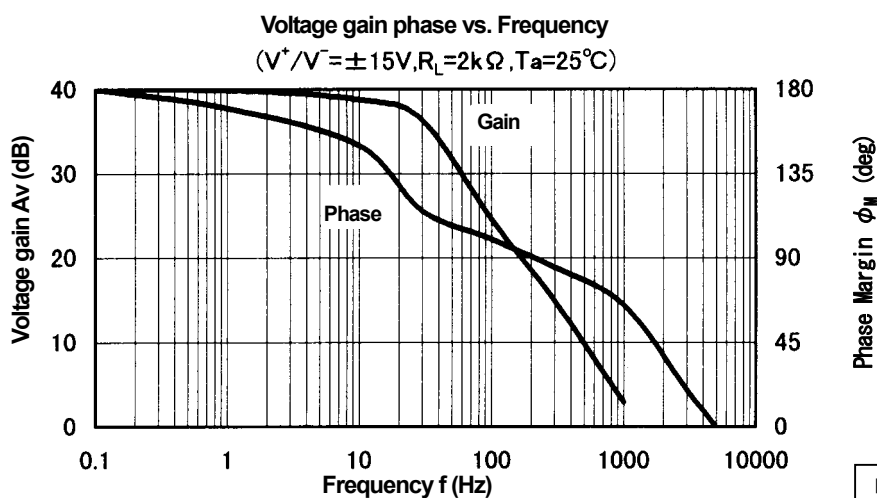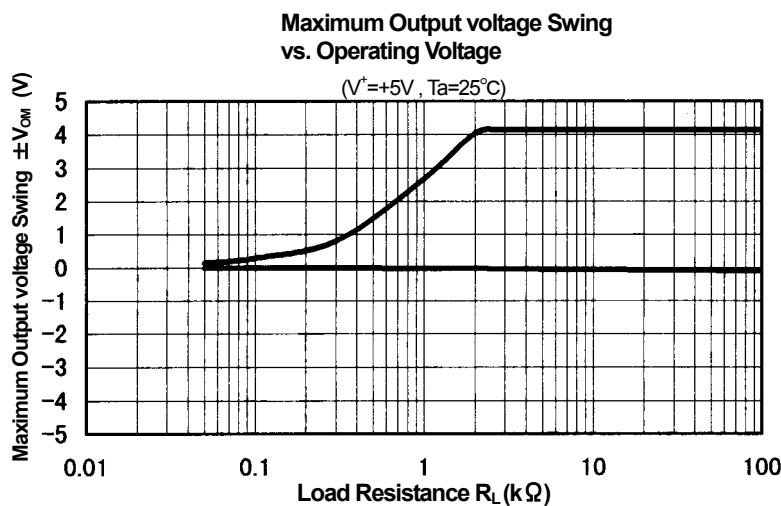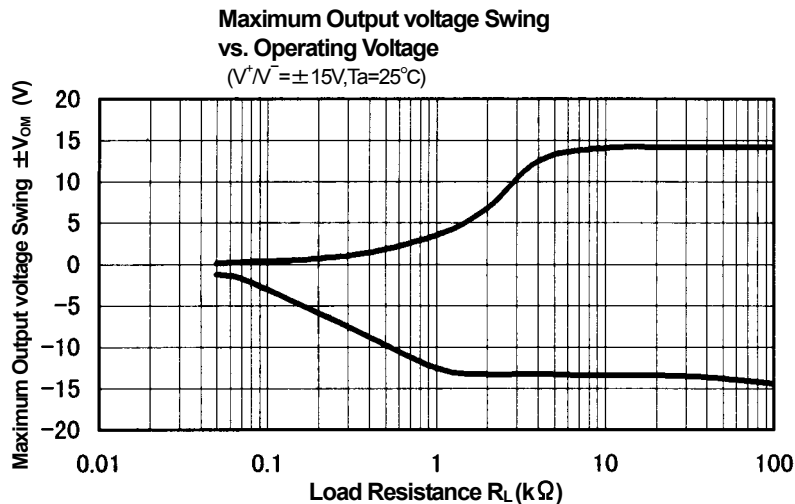

[CAUTION]  
The specifications on this databook are only given for information, without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.