



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



High Speed Current Feedback Operational Amplifier

■ General Description

The NJM2723 is a high speed, wide bandwidth and high output current feedback operational amplifier. Driving 150Ω load can expand the versatility of several multimedia applications. Current feedback technology has wide bandwidth and Low supply current.

With a 75MHz at G=+2, 24MHz at G=+10, high slew rate of 2000V/μs, second harmonic distortion -65dB and settling time of 50ns(0.1%) The NJM2723 makes it ideal for high frequency amplifier, active filter and pulse amplifier applications.

■ Features

High Speed

- Bandwidth 75MHz (-3dB, G=+2)
- Bandwidth 24MHz (-3dB, G=+10)
- Slew Rate 2000V/μs

For Video Applications ($V^+/V^-=\pm 5V$)

- Bandwidth 52MHz (-3dB, G=+2)
- Bandwidth 8MHz (0.1dB, G=+2)
- Differential Gain 0.05%
- Differential Phase 0.25deg
- Settling Time 50ns (0.1%, G=+2)

Low Noise

- Voltage Noise 6nV/√Hz (@1kHz)
- Current Noise 13pA/√Hz (@1kHz)
- THD -60dBc (@10MHz)

- Specified for ±5V and ±15V operation
- 150Ω Drive Capability
- Output Voltage ±3.5V min. ($R_L=150\Omega, V^+/V^-=\pm 15V$)
±2.4V min. ($R_L=150\Omega, V^+/V^-=\pm 5V$)
- Supply Range ±3.5V~±17.5V
- Supply Current 5mA max.

■ Applications

- High frequency amplifier
- Active Filter
- 150Ω cable driver
- Video amplifier

150Ω Drive High Slew Rate OP-AMP Lineup (Single)

| | SR=250V/μs | SR=500V/μs | SR=2000V/μs |
|------------------|------------|------------|-------------|
| Voltage Feedback | NJM2720 | NJM2721 | |
| Current Feedback | | | NJM2723 |

■ Package Outline



NJM2723D




NJM2723E

ORDER INFORMATION

| Parts | Package |
|----------|-------------------|
| NJM2723D | DIP8 |
| NJM2723E | SOP8 JEDEC 150mil |

■ Pin Configuration

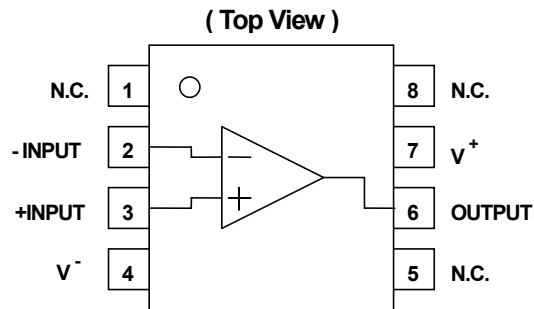

NJM2723

■ ABSOLUTE MAXIMUM RATINGS

(Ta=25°C, unless otherwise noted.)

| PARAMETER | SYMBOL | RATING | UNIT |
|----------------------------------|------------------|--|------|
| Supply Voltage | V _{DD} | ±18 | V |
| Common Mode Input Voltage Range | V _{ICM} | ±18(Note1) | V |
| Differential Input Voltage Range | V _{ID} | ±3(Note1) | V |
| Power Dissipation (Note4) | P _D | DIP8: 500 SOP8: 375 / 625 (Note2) / 875 (Note3) | mW |
| Operating Temperature Range | T _{opr} | -40~+85 | °C |
| Storage Temperature Range | T _{stg} | -50~+150 | °C |


(Note1) For supply voltage less than ±18V, the absolute maximum rating is equal to the supply voltage.

(Note2) On the PCB "EIA/JEDEC (114.3×76.2×1.6mm, 2 layers, FR-4)"

(Note3) On the PCB "EIA/JEDEC (114.3×76.2×1.6mm, 4 layers, FR-4)"

(Note4) See Figure "Power Dissipation Derating Curve" when ambient temperature is over 25°C.

Power Dissipation Derating Curve

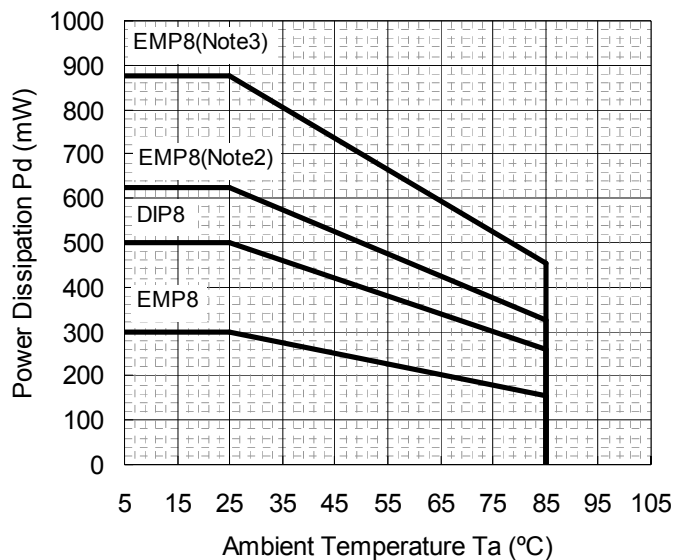

| Package | ΔPd (mW/°C) |
|-------------|-------------|
| DIP8 | -4.0 |
| SOP8 | -3.0 |
| SOP8(Note2) | -5.0 |
| SOP8(Note3) | -7.0 |

■ RECOMMENDED OPERATING VOLTAGE

(Ta=25°C)

| PARAMETER | SYMBOL | TEST CONDITION | MIN. | TYP. | MAX. | UNIT |
|----------------|-------------------|----------------|------|------|-------|------|
| Supply Voltage | V ⁺ /V | | ±3.5 | - | ±17.5 | V |

■ **ELECTRICAL CHARACTERISTICS** (Measurement is to be conducted as pulse testing.)

● **DC CHARACTERISTICS**

($V^+ / V^- = \pm 15V$, $T_a = 25^\circ C$, unless otherwise noted.)

| PARAMETER | SYMBOL | TEST CONDITION | MIN. | TYP. | MAX. | UNIT |
|---------------------------------|------------------|--|-------|------|------|------|
| Supply Current | I _{CC} | No Signal | - | 2.9 | 5 | mA |
| Input Offset Voltage | V _{IO} | | - | 4 | 20 | mV |
| Input Bias Current | I _{B+} | | - | 2 | 20 | uA |
| | I _{B-} | | - | 2 | 20 | uA |
| Transimpedance | Z _T | R _L =1kΩ, V _o =±10V | 1.0 | 2.5 | - | MΩ |
| Common Mode Input Voltage Range | V _{ICM} | CMR≥56dB | ±11 | ±12 | - | V |
| Common Mode Rejection Ratio | CMR | -11V≤V _{ICM} ≤+11V | 56 | 66 | - | dB |
| Supply Voltage Rejection Ratio | SVR | ±3.5V≤V ⁺ /V ⁻ ≤±17.5V | 66 | 76 | - | dB |
| Maximum Output Voltage | V _{OM} | R _L =1kΩ | ±11.5 | ±13 | - | V |
| Maximum Output Voltage | V _{OM} | R _L =150Ω | ±3.5 | ±4.5 | - | V |

● **AC CHARACTERISTICS**

($V^+ / V^- = \pm 15V$, $T_a = 25^\circ C$, unless otherwise noted.)

| PARAMETER | SYMBOL | TEST CONDITION | MIN. | TYP. | MAX. | UNIT |
|--------------------------------|---------------------|---|------|------|------|--------|
| Bandwidth | BW _{-3dB} | G _V =6dB, R _F =680Ω, R _G =680Ω, R _L =1kΩ, C _L =1pF | - | 75 | - | MHz |
| | | G _V =20dB, R _F =680Ω, R _G =75Ω, R _L =1kΩ, C _L =1pF | - | 24 | - | MHz |
| 0.1dB Flatness | BW _{0.1dB} | G _V =6dB, R _F =680Ω, R _G =680Ω, R _L =1kΩ, C _L =1pF | - | 12 | - | MHz |
| Slew Rate | SR | G _V =6dB, R _F =680Ω, R _G =680Ω, R _L =1kΩ, C _L =1pF, V _o =10Vpp, measured 20% to 80% | - | 1500 | - | V/us |
| Slew Rate | SR | G _V =6dB, R _F =680Ω, R _G =680Ω, R _L =1kΩ, C _L =1pF, V _o =20Vpp, measured 20% to 80% | - | 2000 | - | V/us |
| Settling Time 0.1% | t _s | G _V =-1, R _F =620Ω, R _G =620Ω, R _L =1kΩ, C _L =1pF, V _o =10Vpp | - | 50 | - | ns |
| Equivalent Input Noise Voltage | V _{ni} | f=100kHz | - | 6 | - | nV/√Hz |
| Equivalent Input Noise Current | I _{ni+} | f=100kHz | - | 13 | - | pA/√Hz |
| Total Harmonic Distortion | THD | G _V =6dB, R _F =680Ω, R _G =680Ω, R _L =1kΩ, V _o =2Vpp, f=10MHz | - | -60 | - | dBc |
| 2nd Harmonic Distortion | HD _{2nd} | G _V =6dB, R _F =680Ω, R _G =680Ω, R _L =1kΩ, V _o =2Vpp, f=10MHz | - | -65 | - | dB |
| 3rd Harmonic Distortion | HD _{3rd} | G _V =6dB, R _F =680Ω, R _G =680Ω, R _L =1kΩ, V _o =2Vpp, f=10MHz | - | -70 | - | dB |

NJM2723

■ ELECTRICAL CHARACTERISTICS (Measurement is to be conducted as pulse testing.)

● DC CHARACTERISTICS

($V^+/V^- = \pm 5V$, $T_a = 25^\circ C$, unless otherwise noted.)







| PARAMETER | SYMBOL | TEST CONDITION | MIN. | TYP. | MAX. | UNIT |
|---------------------------------|------------------|--|------|-------|------|------|
| Supply Current | I _{CC} | No Signal | - | 2.8 | 4.5 | mA |
| Input Offset Voltage | V _{IO} | | - | 4 | 20 | mV |
| Input Bias Current | I _{B+} | | - | 2 | 20 | uA |
| | I _{B-} | | - | 2 | 20 | uA |
| Transimpedance | Z _T | R _L =150Ω, V _o =±2V | 0.25 | 0.85 | - | MΩ |
| Common Mode Input Voltage Range | V _{ICM} | CMR≥50 | ±2 | ±2.25 | - | V |
| Common Mode Rejection Ratio | CMR | -2≤V _{ICM} ≤+2 | 50 | 60 | - | dB |
| Supply Voltage Rejection Ratio | SVR | ±3.5≤V ⁺ /V ⁻ ≤±17.5 | 66 | 76 | - | dB |
| Maximum Output Voltage | V _{OM} | R _L =1kΩ | ±2.8 | ±3.3 | - | V |
| Maximum Output Voltage | V _{OM} | R _L =150Ω | ±2.4 | ±2.8 | - | V |

● AC CHARACTERISTICS

($V^+/V^- = \pm 5V$, $T_a = 25^\circ C$, unless otherwise noted.)


| PARAMETER | SYMBOL | TEST CONDITION | MIN. | TYP. | MAX. | UNIT |
|--------------------------------|---------------------|--|------|------|------|--------|
| Bandwidth | BW _{-3dB} | G _V =6dB, R _F =680Ω, R _G =680Ω, R _L =150Ω, C _L =1pF | - | 52 | - | MHz |
| | | G _V =20dB, R _F =680Ω, R _G =75Ω, R _L =150Ω, C _L =1pF | - | 16 | - | MHz |
| 0.1dB Flatness | BW _{0.1dB} | G _V =6dB, R _F =680Ω, R _G =680Ω, R _L =150Ω, C _L =1pF | - | 8 | - | MHz |
| Slew Rate | SR | G _V =6dB, R _F =680Ω, R _G =680Ω, R _L =150Ω, C _L =1pF, V _o =2Vpp | - | 180 | - | V/us |
| Settling Time 0.1% | t _s | G _V =-1, R _F =620Ω, R _G =620Ω, R _L =150Ω, C _L =1pF, V _o =2Vpp | - | 50 | - | ns |
| Equivalent Input Noise Voltage | V _{ni} | f=100kHz | - | 5 | - | nV/√Hz |
| Equivalent Input Noise Current | I _{ni+} | f=100kHz | - | 13 | - | pA/√Hz |
| Total Harmonic Distortion | THD | G _V =6dB, R _F =680Ω, R _G =680Ω, R _L =150Ω, V _o =2Vpp, f=10MHz | - | -50 | - | dBc |
| 2nd Harmonic Distortion | HD _{2nd} | G _V =6dB, R _F =680Ω, R _G =680Ω, R _L =150Ω, V _o =2Vpp, f=10MHz | - | -60 | - | dB |
| 3rd Harmonic Distortion | HD _{3rd} | G _V =6dB, R _F =680Ω, R _G =680Ω, R _L =150Ω, V _o =2Vpp, f=10MHz | - | -50 | - | dB |
| Differential Gain | DG | G _V =6dB, R _F =680Ω, R _G =680Ω, R _L =150Ω, C _L =1pF, V _{INDC} =1/0, V _{IN} =0.286V | - | 0.05 | - | % |
| Differential Phase | DP | G _V =6dB, R _F =680Ω, R _G =680Ω, R _L =150Ω, C _L =1pF, V _{INDC} =1/0, V _{IN} =0.286V | - | 0.25 | - | deg |

■ TYPICAL CHARACTERISTICS

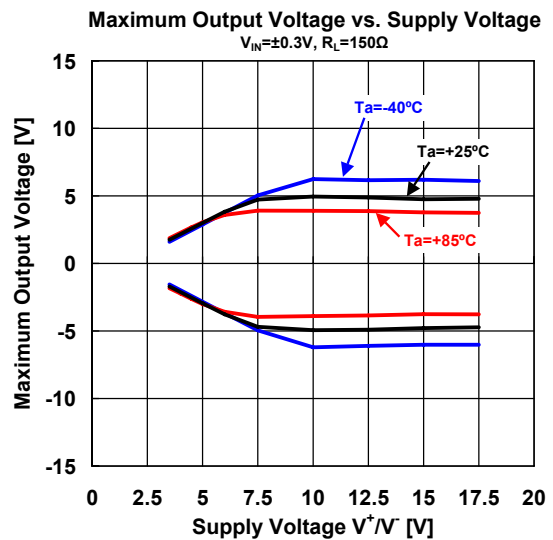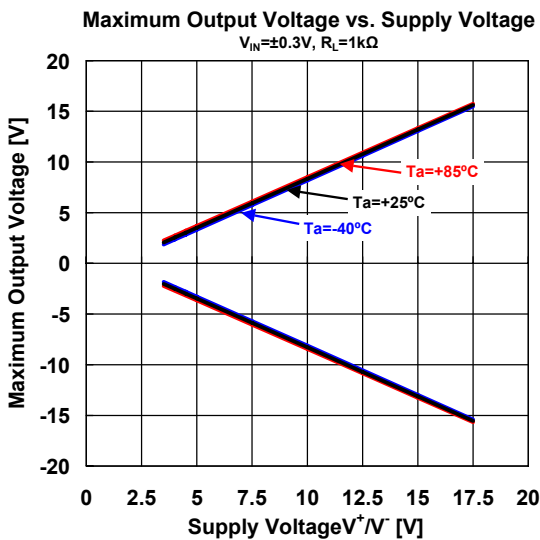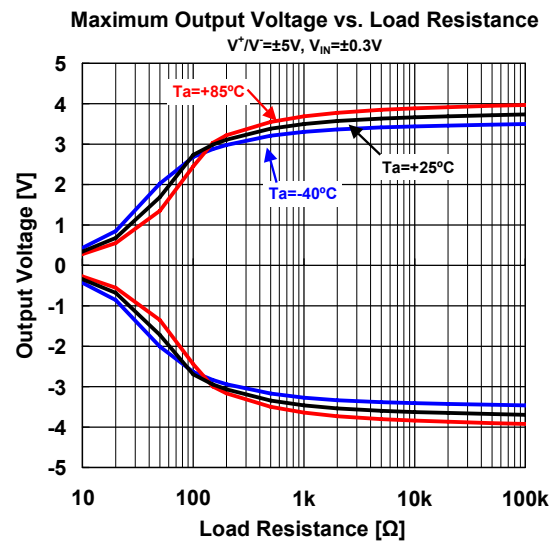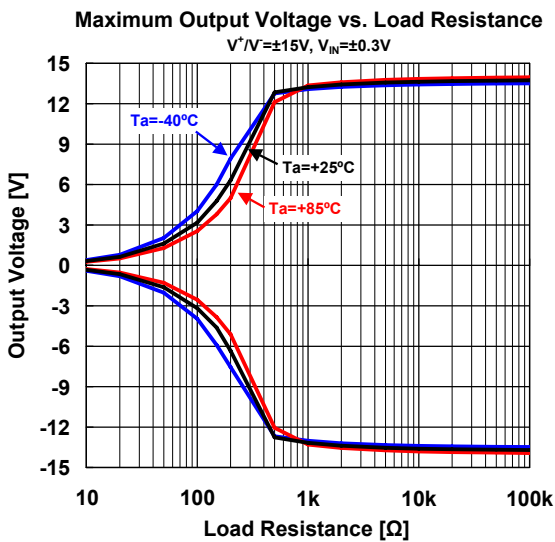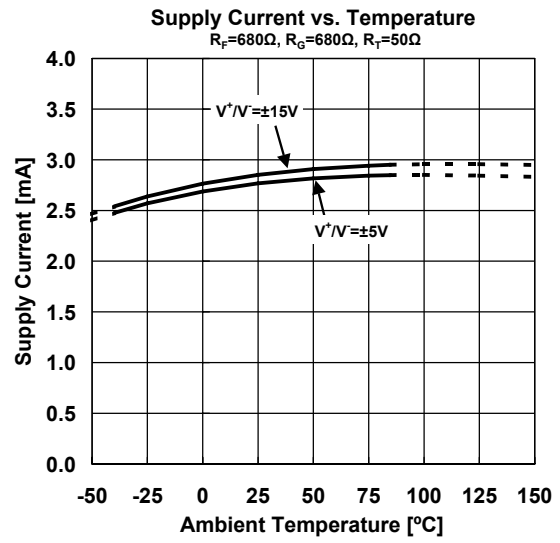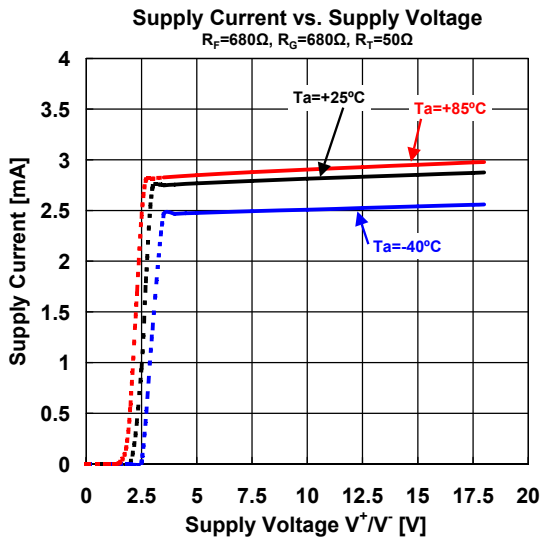


■ TYPICAL CHARACTERISTICS


Input Offset Voltage vs. Temperature
 $V_{IN}=0V$

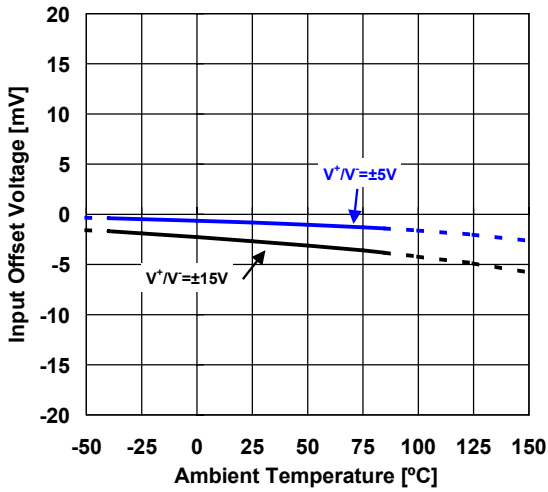


Input Bias Current vs. Temperature
 $V^+/V^-=\pm 15V, V_{IN}=0V$

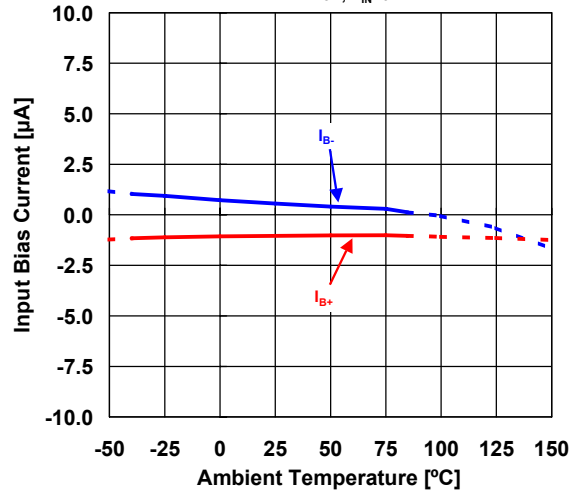


Input Bias Current vs. Temperature
 $V^+/V^-=\pm 5V, V_{IN}=0V$

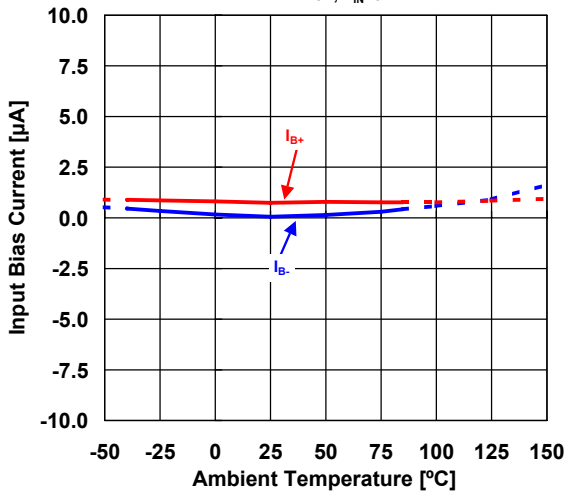


Transimpedance vs. Temperature

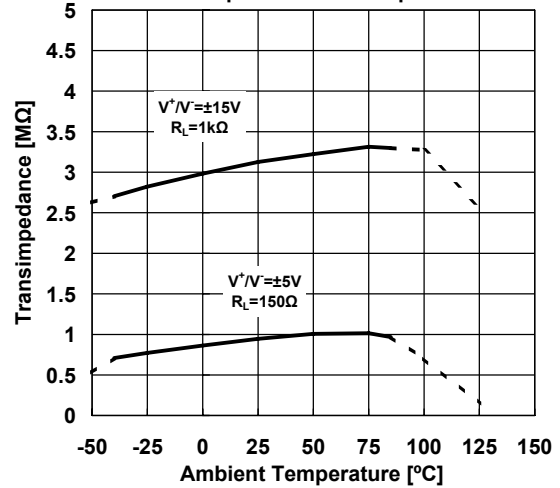






CMR vs. Temperature

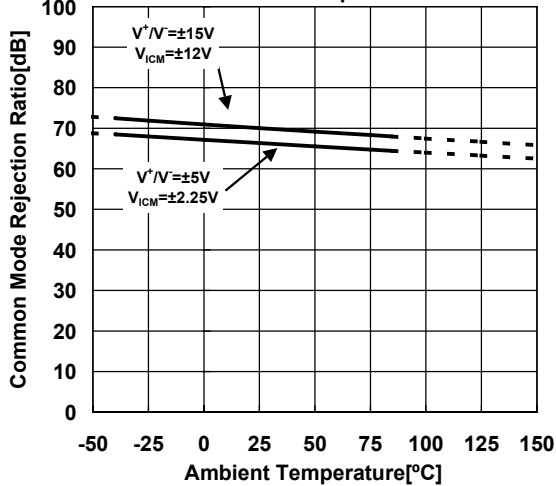

SVR vs. Temperature

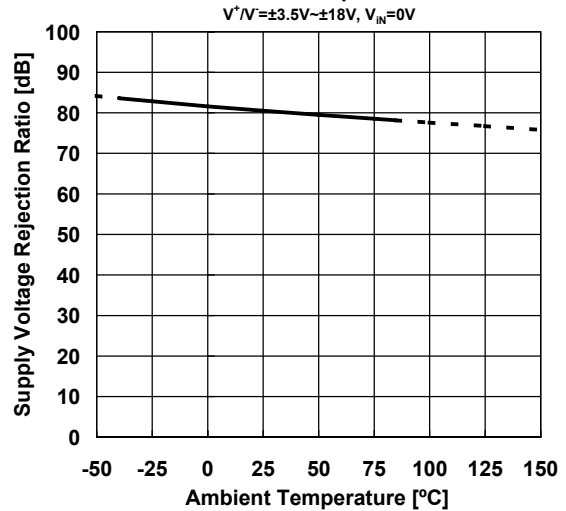


■ TYPICAL CHARACTERISTICS

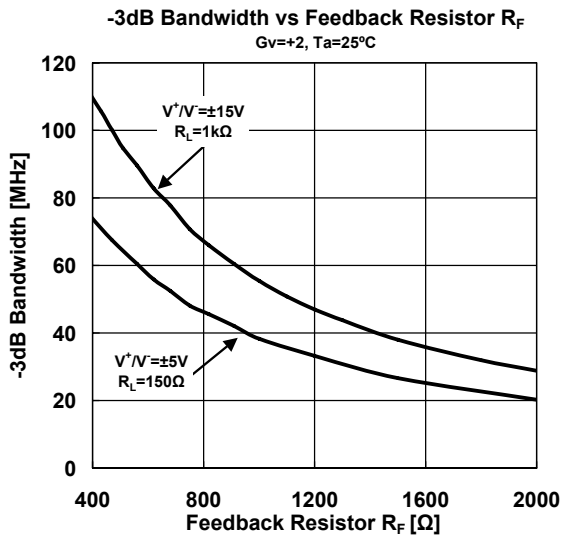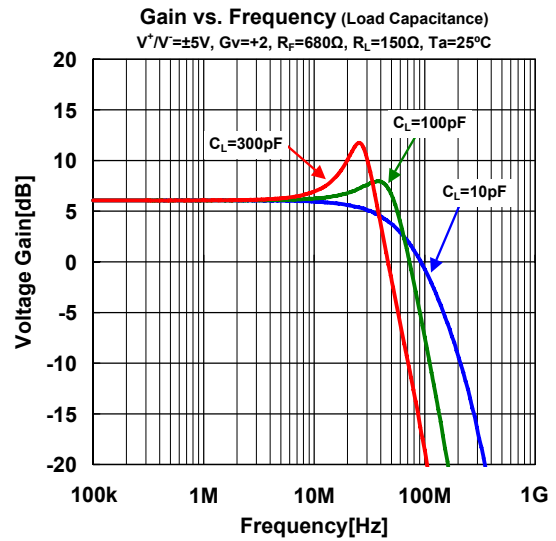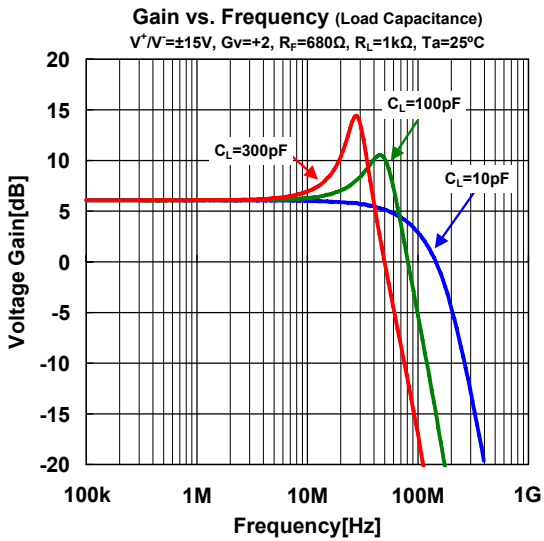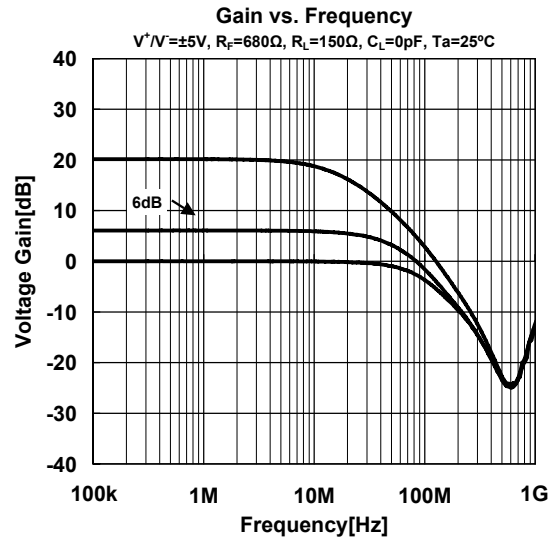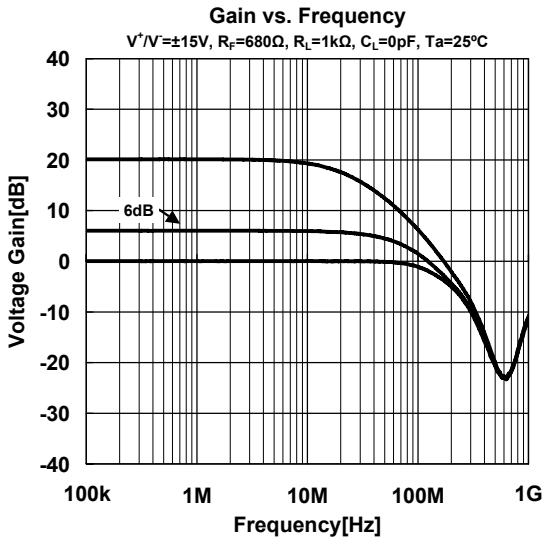

■ TYPICAL CHARACTERISTICS

Pulse Response


$V^+/V^- = \pm 15V$, $G_v = +2$, $R_F = 680\Omega$, $R_L = 1k\Omega$, $C_L = 0pF$, $V_O = 10V_{pp}$

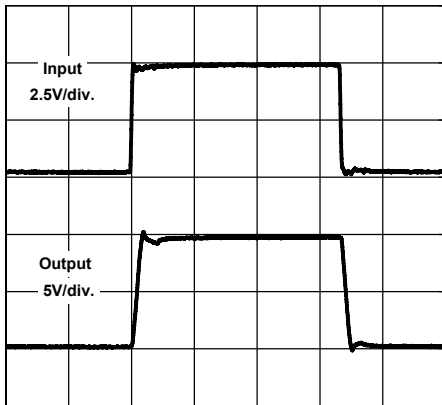

50ns/div.

Pulse Response


$V^+/V^- = \pm 5V$, $G_v = 2$, $R_F = 680\Omega$, $R_L = 150\Omega$, $C_L = 0pF$, $V_O = 2V_{pp}$, $T_a = 25^\circ C$

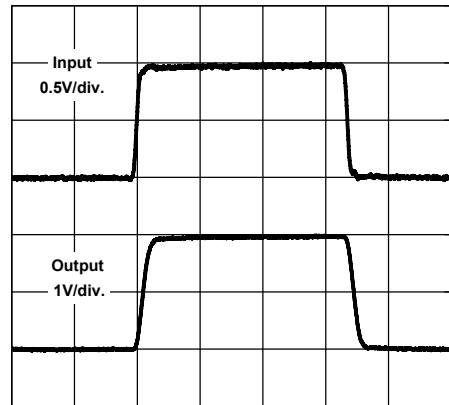

50ns/div.

Pulse Response


$V^+/V^- = \pm 15V$, $G_v = -1$, $R_F = 680\Omega$, $R_L = 1k\Omega$, $C_L = 0pF$, $V_O = 10V_{pp}$

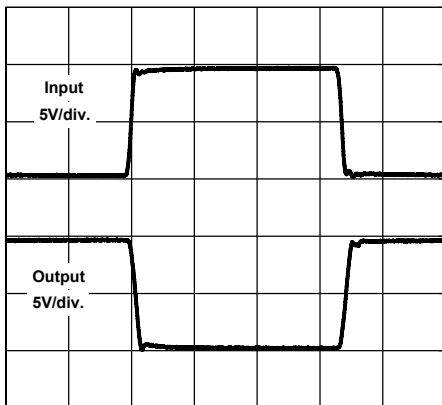

50ns/div.

Pulse Response


$V^+/V^- = \pm 5V$, $G_v = -1$, $R_F = 680\Omega$, $R_L = 150\Omega$, $C_L = 0pF$, $V_O = 2V_{pp}$, $T_a = 25^\circ C$

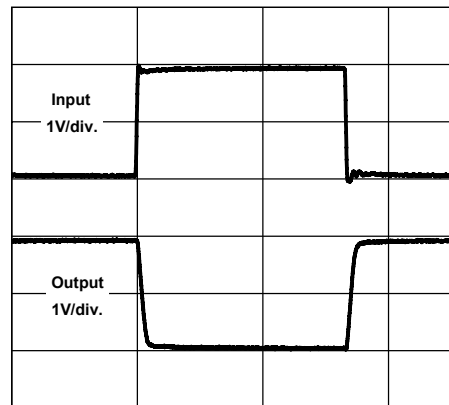



50ns/div.

Slew Rate vs. Feedback Resistor R_F

$V^+/V^- = \pm 15V$, $G_v = +2$, $T_a = 25^\circ C$
(Measured from 20% to 80%)

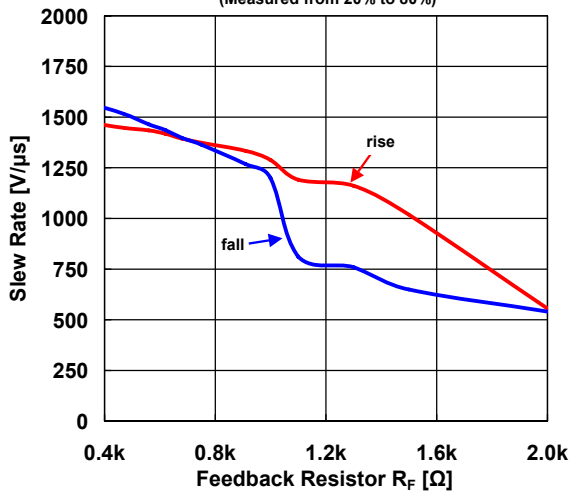

■ TYPICAL CHARACTERISTICS

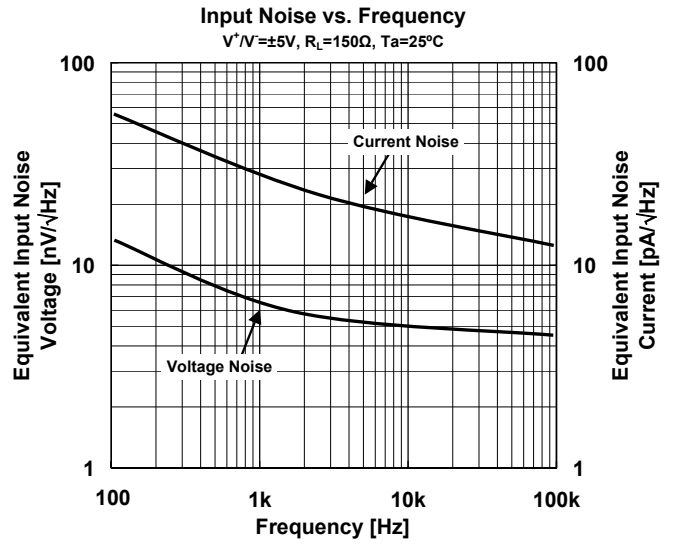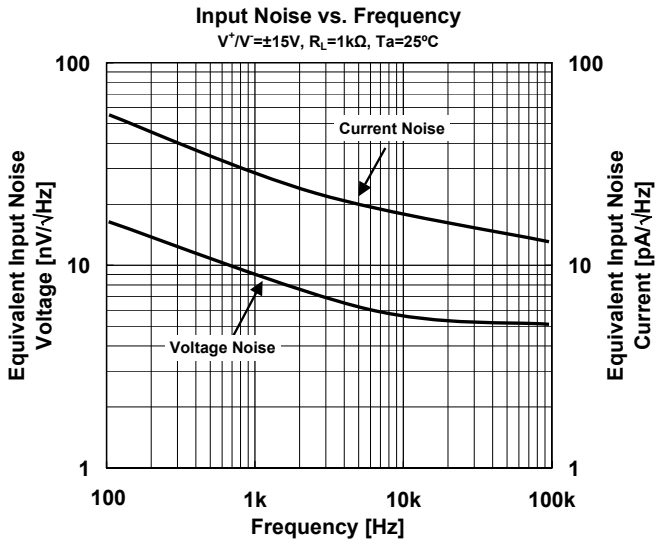

NJM2723

Application Note

- Choice of feedback resistor and gain resistor for current feedback operational Amplifier

The NJM2723 is a current feedback operational amplifier. Closed-loop bandwidth depends on the feedback resistor value. Table1 shows recommended resistor values for a variety of useful closed-loop gains and supply voltages.

Figure1. Formula of non-inverting / inverting amplifier

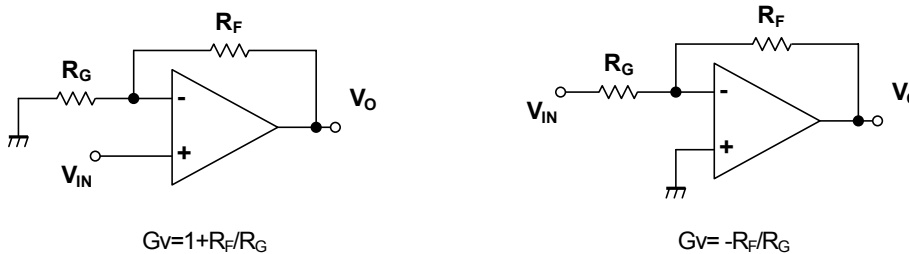


Table1. -3dB Bandwidth vs. Closed-loop Gain and Resistance Value


| $V^+/V^-=\pm 15V$ | | | | $V^+/V^-=\pm 5V$ | | | |
|-------------------|---------------|---------------|--------------|------------------|---------------|---------------|--------------|
| Closed-Loop Gain | $R_F[\Omega]$ | $R_G[\Omega]$ | -3dB BW[MHz] | Closed-Loop Gain | $R_F[\Omega]$ | $R_G[\Omega]$ | -3dB BW[MHz] |
| +1 | 750 | - | 120 | +1 | 680 | - | 85 |
| +2 | 680 | 680 | 76 | +2 | 680 | 680 | 52 |
| +10 | 680 | 75 | 20 | +10 | 620 | 68 | 15 |
| -1 | 680 | 680 | 65 | -1 | 680 | 680 | 50 |
| -10 | 680 | 68 | 25 | -10 | 680 | 68 | 20 |

- In case of using Voltage follower

The feedback resistance must be inserted when using a current feedback amplifier as the voltage follower.

A current feedback amplifier cannot be used by connecting output pin and inverting input pin directly. (Figure2)


Figure2. Voltage follower circuit



- In case of using capacitive Feedback

For a current feedback amplifier stability operation, do not use a compensation capacitor in parallel with feedback resistance. The dynamic impedance of capacitor in the feedback loop reduces the amplifier's stability.

Figure3. Non-stability circuit example

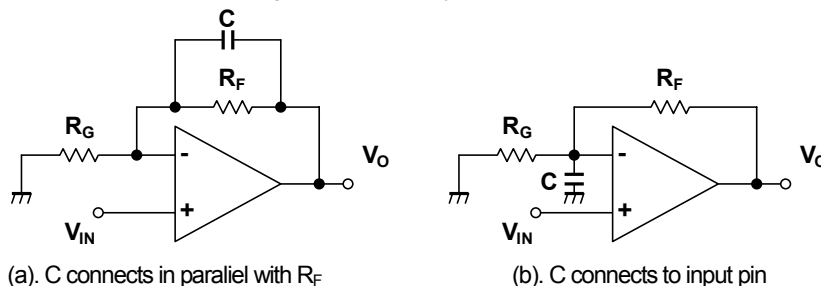

■ MEMO

[CAUTION]

The specifications on this data book are only given for information, without any guarantee as regards either mistakes or omissions. The application circuits in this data book are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.