



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China

Full-Swing Input and Output type Dual Operational Amplifier

■ GENERAL DESCRIPTION

NJM2732 is dual operational amplifier with full swing input and output, operate from 1.8V.

Input and Output Full Swing provides wide dynamic range, is from ground to power supply level. In addition to ground sensing applications, NJM2732 enable to be applied to Hi-side sensing applications.

The features are low noise and low operating voltage for battery management, portable audio applications, and others.

■ PACKAGE OUTLINE



NJM2732D



NJM2732M



NJM2732E



NJM2732V




NJM2732RB1

■ FEATURES

- Operating Voltage : 1.8 to 6.0V
- Input Full-Swing : $V_{ICM} = 0$ to 5.0V, at $V^+ = 5V$
- Output Full-Swing : $V_{OH} \geq 4.9V / V_{OL} \leq 0.1V$, at $V^+ = 5V, R_L = 20k\Omega$
 $V_{OH} \geq 4.75V / V_{OL} \leq 0.25V$, at $V^+ = 5V, R_L = 2k\Omega$
- Load Drivability : 5mV max.
- Offset Voltage : 0.4V/μs typ.
- Slew Rate : 10nV/√Hz typ.
- Low Input Voltage Noise : $\Phi_M = 75$ deg. typ., at $R_L = 2k\Omega$, voltage follower
- Adequate phase margin
- Bipolar Technology
- Package Outline : DIP8, DMP8, EMP8, SSOP8, TVSP8

■ PIN CONFIGURATION

(Top View)

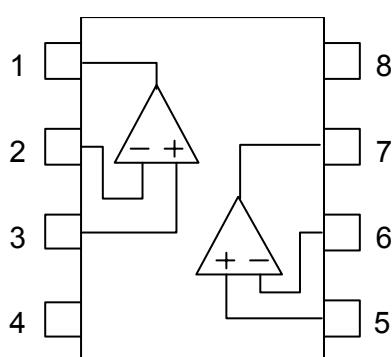

PIN FUNCTION	
1. A	OUTPUT
2. A	-INPUT
3. A	+INPUT
4.	GND
5. B	+INPUT
6. B	-INPUT
7. B	OUTPUT
8.	V^+

NJM2732D
NJM2732M
NJM2732E
NJM2732V
NJM2732RB1

NJM2732

■ ABSOLUTE MAXIMUM RATINGS

(Ta=25°C)

PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	V ⁺	7.0	V
Differential Input Voltage Range	V _{ID}	±1.0	V
Common Mode Input Voltage Range	V _{IC}	0 ~ 7.0 (Note1)	V
Power Dissipation	P _D	(DIP8) 500 (DMP8) 300 (EMP8) 320 (SSOP8) 250 (TVSP8) 320	mW
Operating Temperature Range	T _{opr}	-40~+85	°C
Storage Temperature Range	T _{stg}	-40~+125	°C

(Note1) For supply voltage less than 7V, the absolute maximum input voltage is equal to the supply voltage.

■ RECOMMENDED OPERATING CONDITION

(Ta=25°C)

PARAMETER	SYMBOL	RATING	UNIT
Supply Voltage	V ⁺	1.8 to 6.0	V

■ ELECTRICAL CHARACTERISTICS (V⁺=5V, Ta=25°C)

•DC CHARACTERISTICS

(V⁺=5V, Ta=25°C)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Operating Current	I _{CC}	No signal applied	-	580	900	µA
Input Offset Voltage	V _{IO}		-	1	5	mV
Input Bias Current	I _B		-	50	250	nA
Input Offset Current	I _{IO}		-	5	100	nA
Large Signal Voltage Gain	A _V	R _L =2kΩ	60	85	-	dB
Common Mode Rejection Ratio	CMR	CMR+: 2.5V≤V _{CM} ≤5V CMR-: 0V≤V _{CM} ≤2.5V (Note2)	55	70	-	dB
Supply Voltage Rejection Ratio	SVR	V ⁺ /V=±2.0V ~ ±3.0V	70	85	-	dB
Maximum Output Voltage 1	V _{OH1}	R _L =20kΩ	4.9	4.95	-	V
Maximum Output Voltage 2	V _{OL1}	R _L =20kΩ	-	0.05	0.1	V
Input Common Mode Voltage Range	V _{ICM}	V _{OH2} R _L =2kΩ	4.75	4.85	-	V
		V _{OL2} R _L =2kΩ	-	0.15	0.25	V
		CMR≥55dB	0	-	5	V

(Note2) CMR is represented by either CMR+ or CMR- has lower value.

CMR+ is measured with 2.5V≤V_{CM}≤5.0 and CMR- is measured with 0V≤V_{CM}≤2.5V.

•AC CHARACTERISTICS

(V⁺=5V, Ta=25°C)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Unity Gain Bandwidth	GB	R _L =2kΩ	-	1	-	MHz
Phase Margin	Φ _M	R _L =2kΩ	-	75	-	Deg
Equivalent Input Noise Voltage	V _{NI}	f=1kHz	-	10	-	nV/√Hz

•TRANSIENT CHARACTERISTICS

(V⁺=5V, Ta=25°C)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Slew Rate	SR	R _L =2kΩ	-	0.4	-	V/µs

■ ELECTRICAL CHARACTERISTICS ($V^+=3V$, $T_a=25^\circ C$)

● DC CHARACTERISTICS

(V⁺=3V, Ta=25°C)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Operating Current	I _{CC}	No signal applied	-	510	880	µA
Input Offset Voltage	V _{IO}		-	1	5	mV
Input Bias Current	I _B		-	50	250	nA
Input Offset Current	I _{IO}		-	5	100	nA
Large Signal Voltage Gain	A _V	R _L =2kΩ	60	84	-	dB
Common Mode Rejection Ratio	CMR	CMR+: 1.5V≤V _{CM} ≤3V CMR-: 0V≤V _{CM} ≤1.5V (Note3)	48	63	-	dB
Supply Voltage Rejection Ratio	SVR	V ⁺ /V=±1.2V ~ ±2.0V	68	83	-	dB
Maximum Output Voltage 1	V _{OH1}	R _L =20kΩ	2.9	2.95	-	V
	V _{OL1}	R _L =20kΩ	-	0.05	0.1	V
Maximum Output Voltage 2	V _{OH2}	R _L =2kΩ	2.75	2.85	-	V
	V _{OL2}	R _L =2kΩ	-	0.15	0.25	V
Input Common Mode Voltage Range	V _{ICM}	CMR≥48dB	0	-	3	V

(Note3) CMR is represented by either CMR+ or CMR-has lower value.

CMR+ is measured with 1.5V≤V_{CM}≤3.0 and CMR- is measured with 0V≤V_{CM}≤1.5V.

● AC CHARACTERISTICS

(V⁺=3V, Ta=25°C)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Unity Gain Bandwidth	GB	R _L =2kΩ	-	1	-	MHz
Phase Margin	Φ _M	R _L =2kΩ	-	75	-	Deg
Equivalent Input Noise Voltage	V _{NI}	f=1kHz	-	10	-	nV/√Hz

● TRANSIENT CHARACTERISTICS

(V⁺=3V, Ta=25°C)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Slew Rate	SR	R _L =2kΩ	-	0.35	-	V/µs

■ ELECTRICAL CHARACTERISTICS ($V^+=1.8V$, $T_a=25^\circ C$)

● DC CHARACTERISTICS

(V⁺=1.8V, Ta=25°C)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Operating Current	I _{CC}	No signal applied	-	460	800	µA
Input Offset Voltage	V _{IO}		-	1	5	mV
Input Bias Current	I _B		-	50	250	nA
Input Offset Current	I _{IO}		-	5	100	nA
Large Signal Voltage Gain	A _V	R _L =2kΩ	60	83	-	dB
Common Mode Rejection Ratio	CMR	CMR+: 0.9V≤V _{CM} ≤1.8V CMR-: 0V≤V _{CM} ≤0.9V (Note4)	48	55	-	dB
Supply Voltage Rejection Ratio	SVR	V ⁺ /V=±1.2V ~ ±2.0V	65	80	-	dB
Maximum Output Voltage 1	V _{OH1}	R _L =20kΩ	1.7	1.75	-	V
	V _{OL1}	R _L =20kΩ	-	0.05	0.1	V
Maximum Output Voltage 2	V _{OH2}	R _L =2kΩ	1.55	1.65	-	V
	V _{OL2}	R _L =2kΩ	-	0.15	0.25	V
Input Common Mode Voltage Range	V _{ICM}	CMR≥40dB	0	-	1.8	V

(Note4) CMR is represented by either CMR+ or CMR-has lower value.

CMR+ is measured with 0.9V≤V_{CM}≤1.8 and CMR- is measured with 0V≤V_{CM}≤0.9V.

● AC CHARACTERISTICS

(V⁺=1.8V, Ta=25°C)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Unity Gain Bandwidth	GB	R _L =2kΩ	-	1	-	MHz
Phase Margin	Φ _M	R _L =2kΩ	-	75	-	Deg
Equivalent Input Noise Voltage	V _{NI}	f=1kHz	-	10	-	nV/√Hz







● TRANSIENT CHARACTERISTICS

(V⁺=1.8V, Ta=25°C)







PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Slew Rate	SR	R _L =2kΩ	-	0.3	-	V/µs

NJM2732

■ TYPICAL CHARACTERISTICS

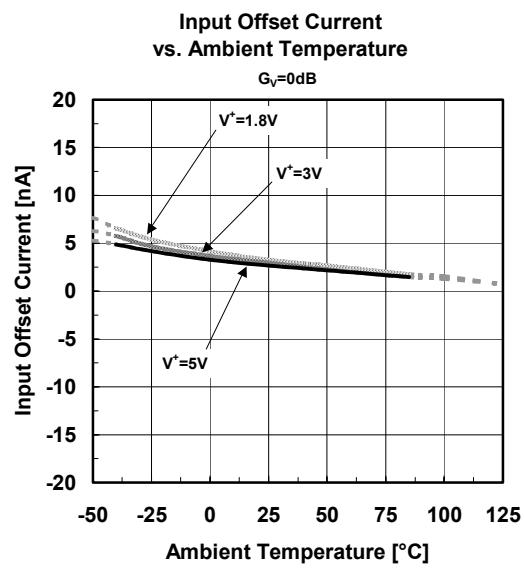
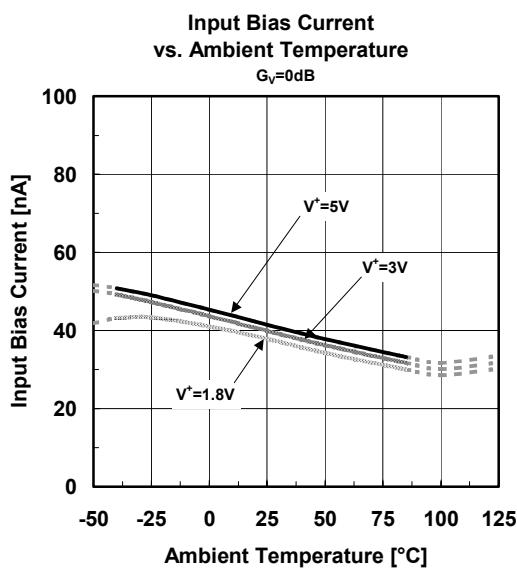
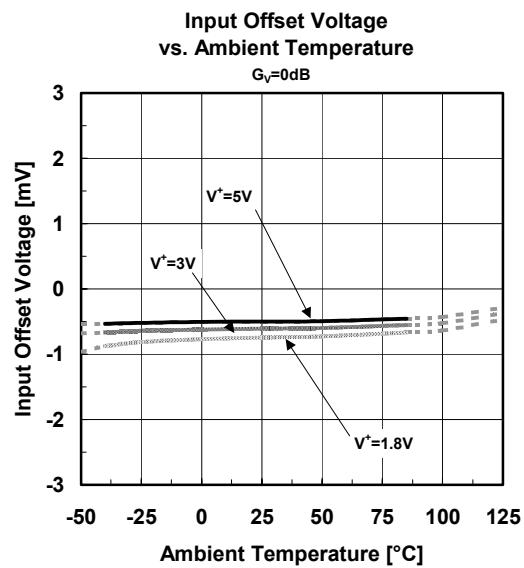
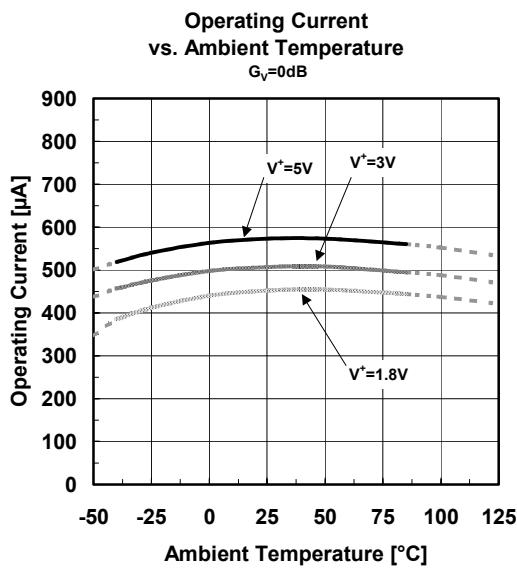
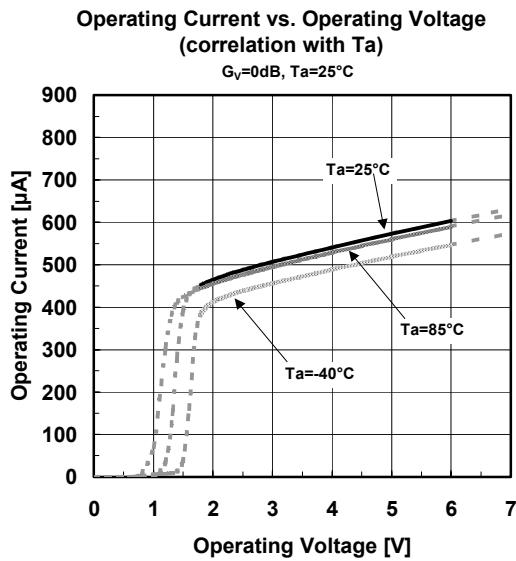
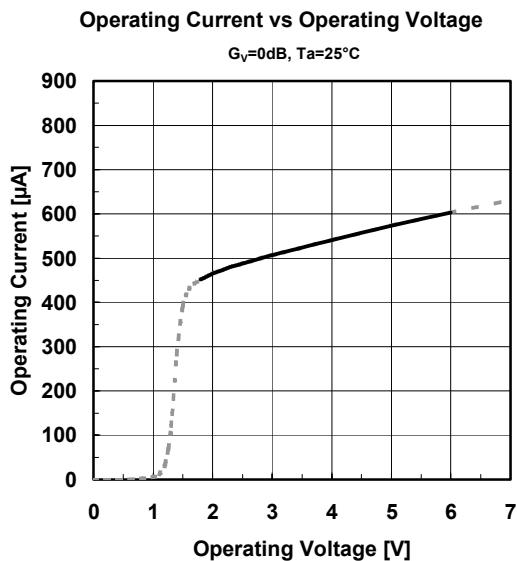


■ TYPICAL CHARACTERISTICS

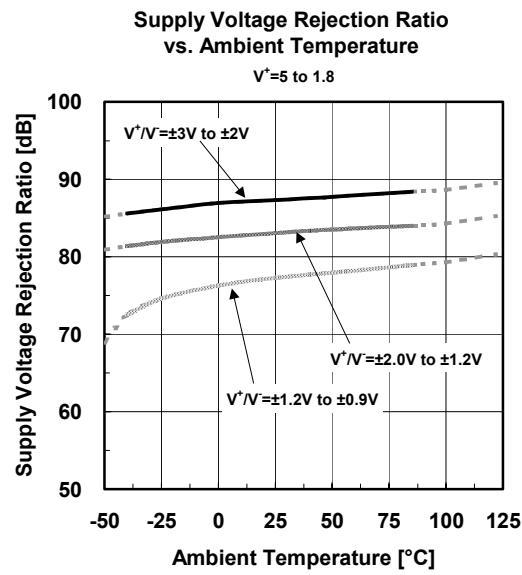
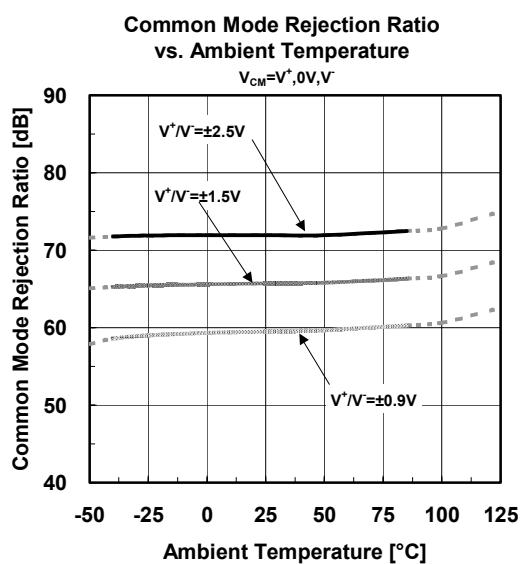
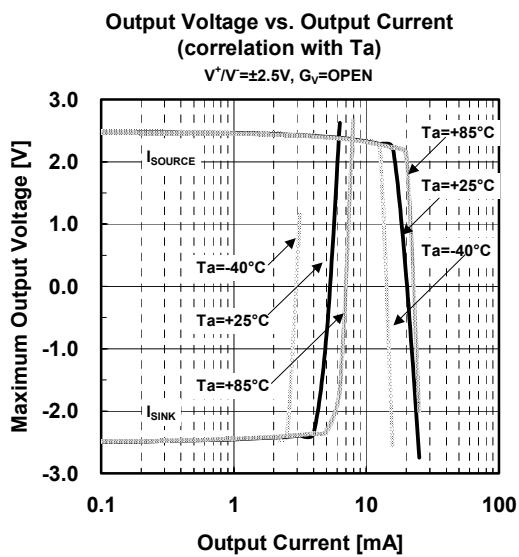
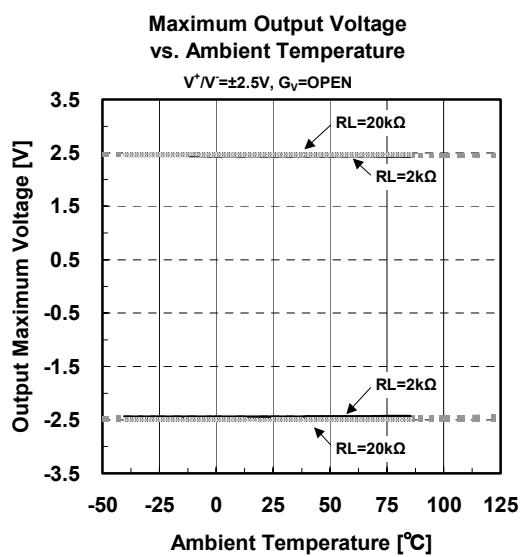
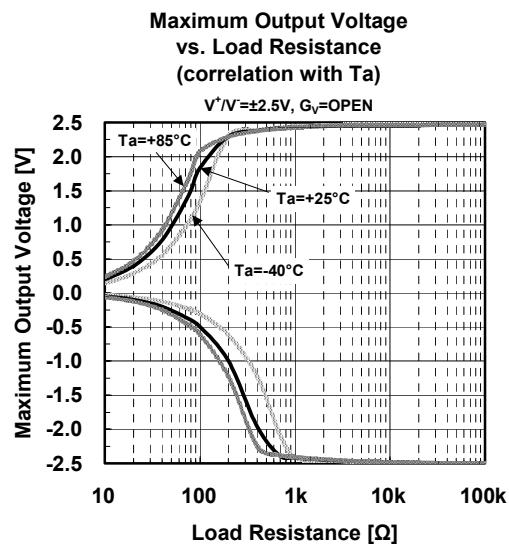
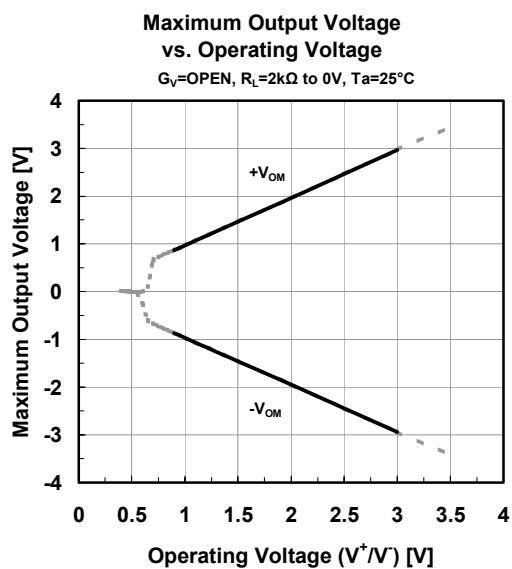


NJM2732

■ TYPICAL CHARACTERISTICS

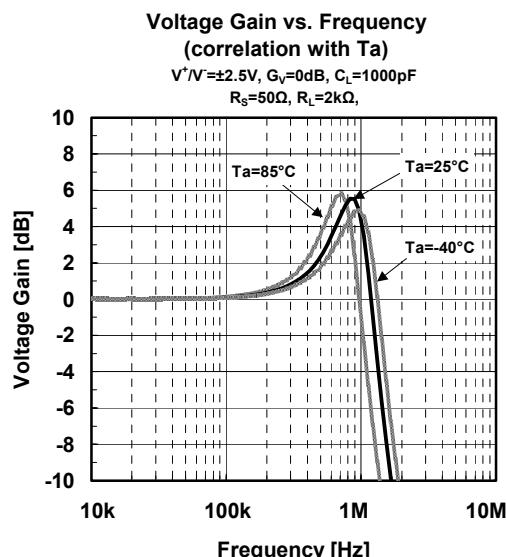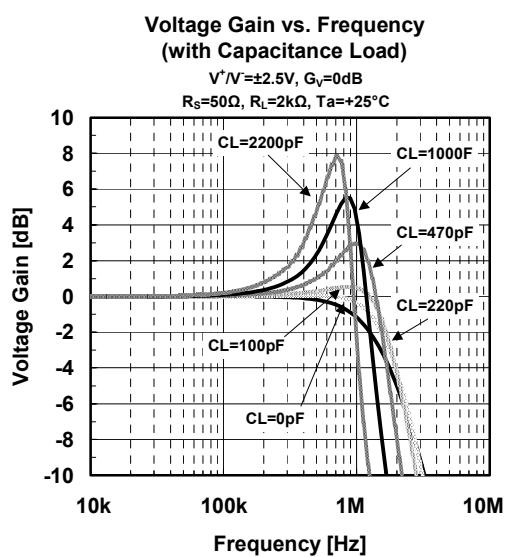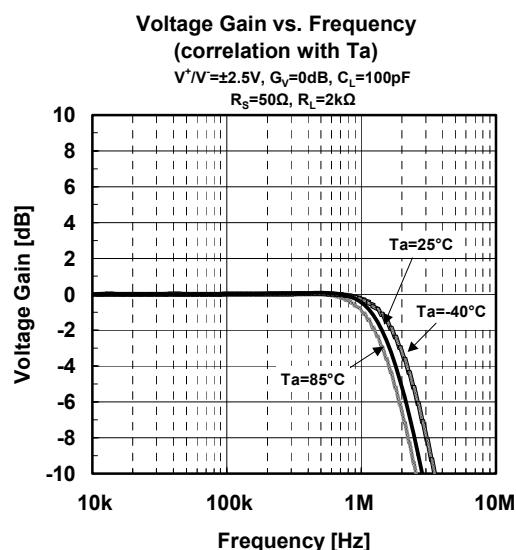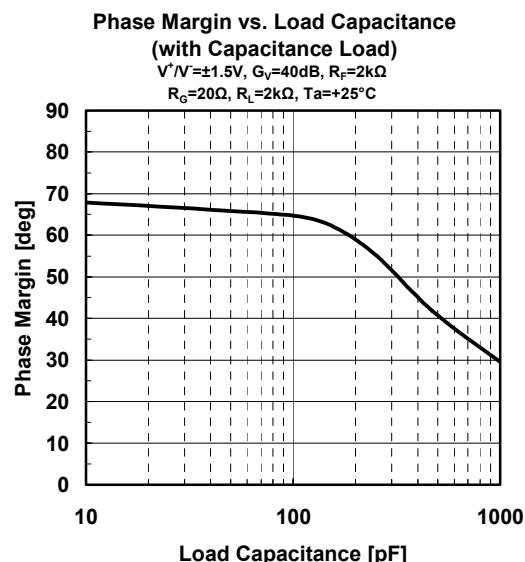
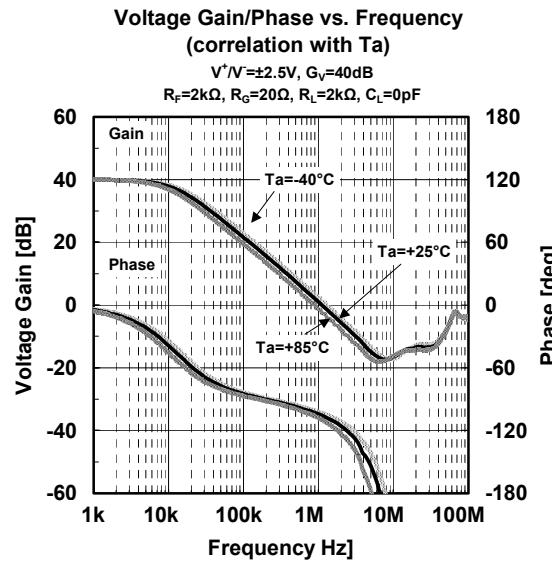
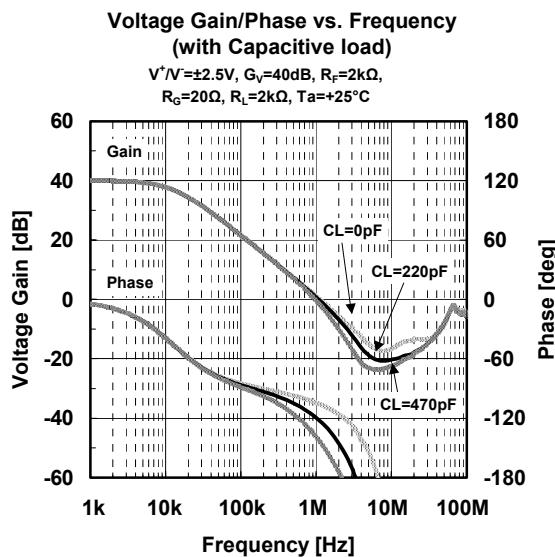


■ TYPICAL CHARACTERISTICS

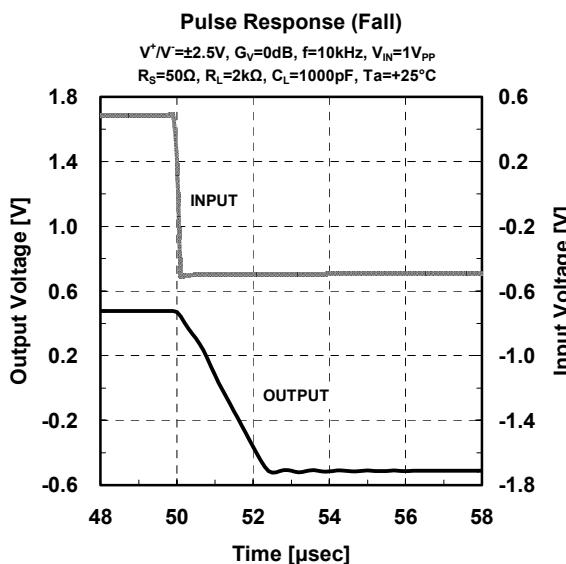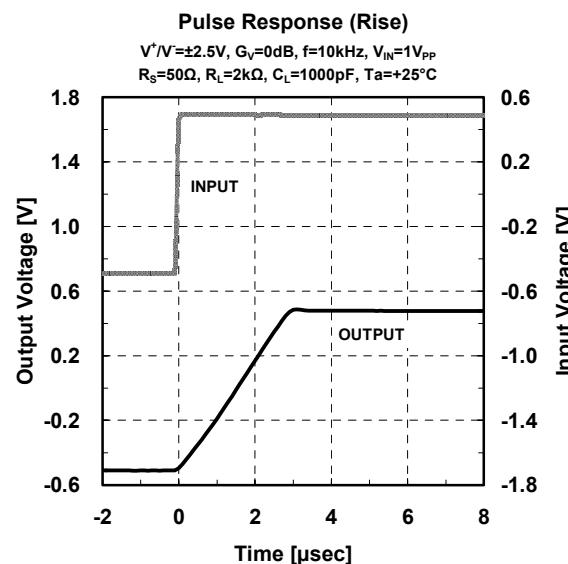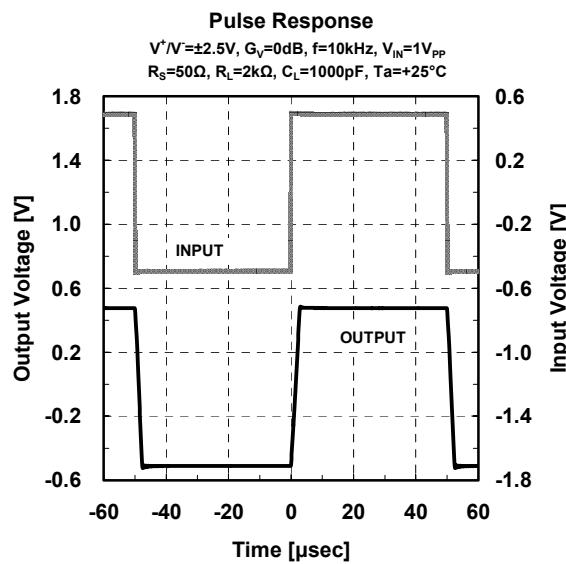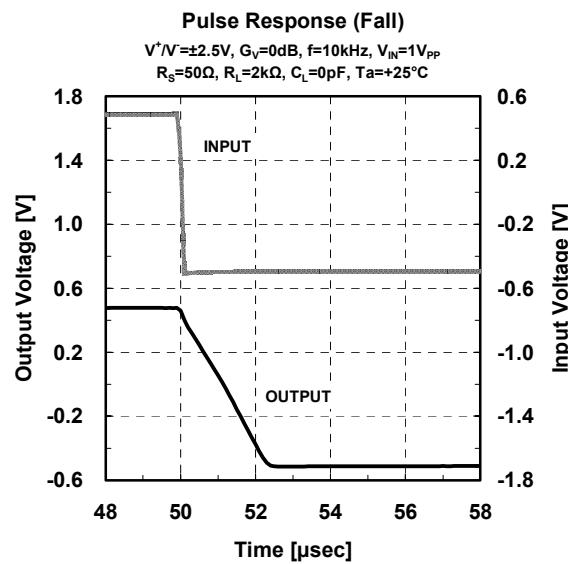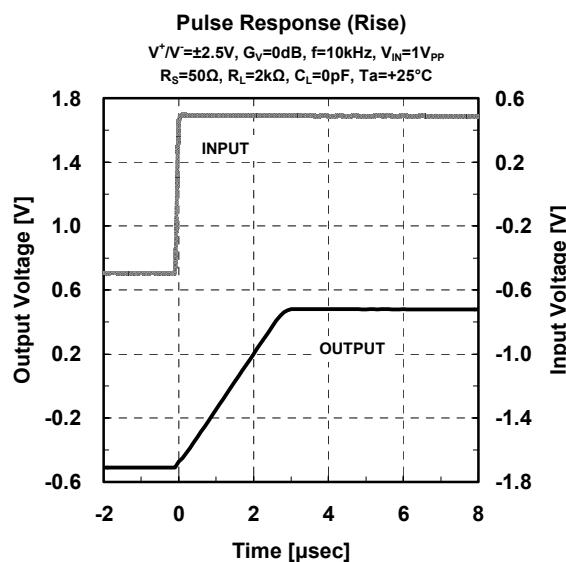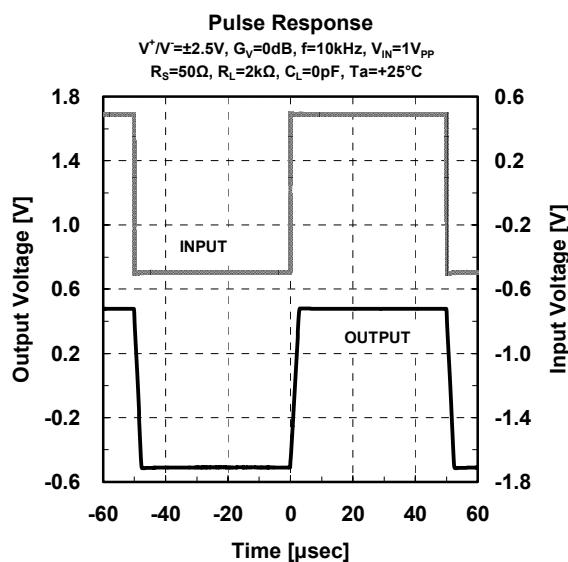

NJM2732

■ TYPICAL CHARACTERISTICS

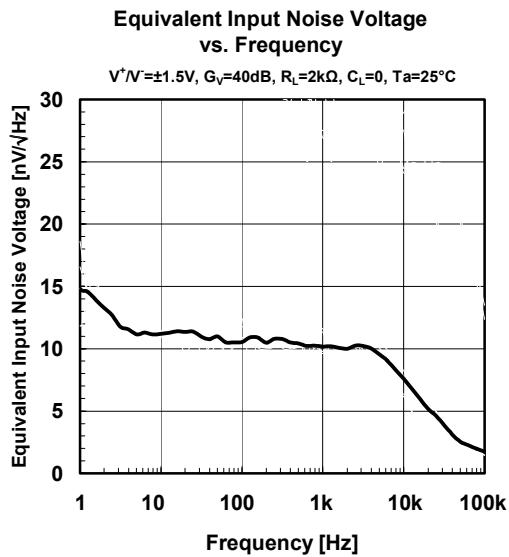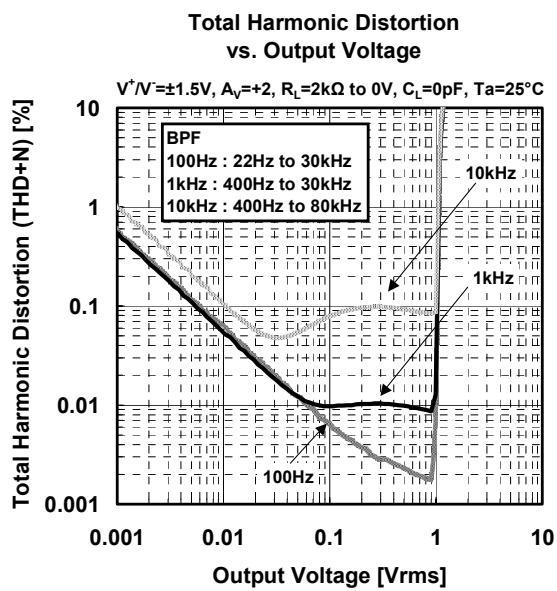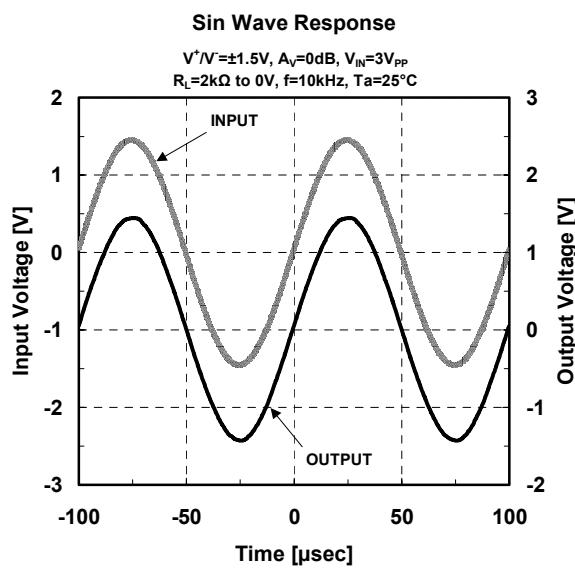

[CAUTION]

The specifications on this databook are only given for information , without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.