



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China

## LOW-NOISE DUAL OPERATIONAL AMPLIFIER

### ■ GENERAL DESCRIPTION


The NJM5532 is a high performance dual low noise operational amplifier. Compared to the standard dual operational amplifiers, such as the NJM1458, it shows better noise performance, improved output drive capability, and considerably higher small-signal and power bandwidths. It is compensated internally for voltage follower circuit. This makes the device especially suitable for application in high quality and professional audio equipment, instrumentation, control circuits, and telephone channel amplifiers.

If very low noise characteristic is of prime importance, it is recommended D-Rank type products(NJM5532DD/LD/MD). These have specified maximum limits for equivalent input noise voltage.


### ■ FEATURES

- Operating Voltage             $\pm 3V \sim \pm 22V$
- Small Signal Bandwidth    10MHz typ.
- Output Drive Capability   600 $\Omega$ , 10VRms typ.
- Input Noise Voltage       5nV/ $\sqrt{Hz}$  typ.
- Power Bandwidth           140kHz typ.
- Slew Rate                   8V/ $\mu s$  typ.
- Bipolar Technology
- Package Outline           DIP8,DMP8,SIP8

### ■ PIN CONFIGURATION

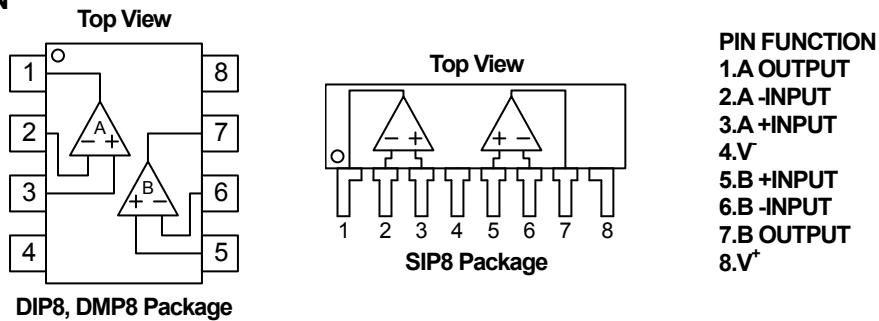

### ■ EQUIVALENT CIRCUIT (1/2 Shown)

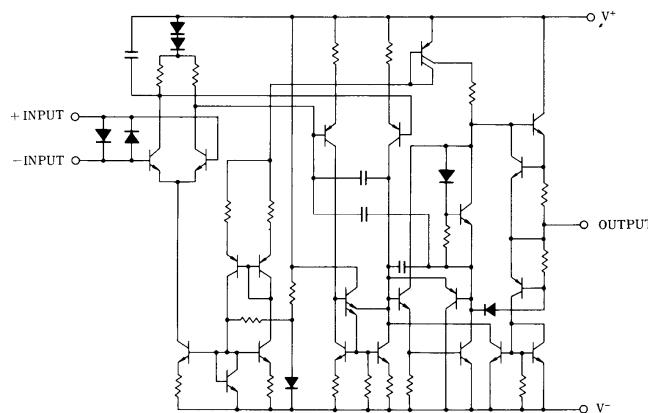

# NJM5532

## ■ ABSOLUTE MAXIMUM RATINGS (Ta=25°C)

PARAMETER	SYMBOL	RATING	UNIT
Supply Voltage	V <sup>+</sup> /V	±22	V
Common Mode Input Voltage Range	V <sub>ICM</sub>	V <sup>+</sup> /V	V
Differential Input Voltage Range	V <sub>ID</sub>	±0.5	V
Power Dissipation	P <sub>D</sub>	DIP8 : 500 DMP8 : 600(Note1) SIP8 : 800	mW
Operating Temperature Range	To <sub>pr</sub>	-20~+75	°C
Storage Temperature Range	T <sub>stg</sub>	-40~+125	°C

(Note1) On the ceramic PCB (10x20x0.635mm)

## ■ RECOMMENDED OPERATING VOLTAGE (Ta=25°C)

PARAMETER	SYMBOL	RATING	UNIT
Supply Voltage	V <sup>+</sup> /V	±3~±22	V

## ■ ELECTRICAL CHARACTERISTICS (V<sup>+</sup>/V=±15V, Ta=25°C, unless otherwise noted.)

### • DC ELECTRICAL CHARACTERISTICS

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Input Offset Voltage	V <sub>IO</sub>	R <sub>S</sub> ≤10kΩ	-	0.5	4	mV
Input Offset Current	I <sub>IO</sub>		-	10	150	nA
Input Bias Current	I <sub>B</sub>		-	200	800	nA
Supply Current	I <sub>CC</sub>	R <sub>L</sub> =∞	-	9	16	mA
Common Mode Input Voltage Range	V <sub>ICM</sub>		± 12	± 13	-	V
Common Mode Rejection Ratio	CMR	R <sub>S</sub> ≤10kΩ	70	100	-	dB
Supply Voltage Rejection Ratio	SVR	R <sub>S</sub> ≤10kΩ	80	100	-	dB
Voltage Gain1	A <sub>V1</sub>	R <sub>L</sub> ≥2kΩ, V <sub>O</sub> =±10V	88	100	-	dB
Voltage Gain2	A <sub>V2</sub>	R <sub>L</sub> ≥600Ω, V <sub>O</sub> =±10V	83.5	94	-	dB
Maximum Output Voltage1	V <sub>OM1</sub>	R <sub>L</sub> ≥600Ω	± 12	± 13	-	V
Maximum Output Voltage2	V <sub>OM2</sub>	R <sub>L</sub> ≥600Ω, V <sup>+</sup> /V=±18V	± 15	± 16	-	V
Input Resistance	R <sub>IN</sub>		30	300	-	kΩ
Short Circuit Output Current	I <sub>OS</sub>		-	38	-	mA

### • AC ELECTRICAL CHARACTERISTICS







PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Output Resistance	R <sub>O</sub>	A <sub>V</sub> =30dB, f=10kHz, R <sub>L</sub> =600Ω	-	0.3	-	Ω
Overshoot		A <sub>V</sub> =1, V <sub>IN</sub> =100mV <sub>PP</sub> , R <sub>L</sub> =100pF, R <sub>L</sub> =600Ω	-	10	-	%
Voltage Gain	A <sub>V</sub>	f=10kHz	-	67	-	dB
Slew Rate	SR		-	8	-	V/μs
Gain Bandwidth Product	GB	C <sub>L</sub> =100pF, R <sub>L</sub> =600Ω	-	10	-	MHz
Power Bandwidth	W <sub>PG</sub>	V <sub>O</sub> =±10V	-	140	-	kHz
	W <sub>PG</sub>	V <sub>O</sub> =±14V, R <sub>L</sub> =600Ω, V <sup>+</sup> /V=±18V	-	100	-	kHz
Equivalent Input Noise Voltage	e <sub>n</sub>	f <sub>0</sub> =30Hz	-	8	-	nV/√Hz
	e <sub>n</sub>	f <sub>0</sub> =1kHz	-	5	-	nV/√Hz
Equivalent Input Noise Current	i <sub>n</sub>	f <sub>0</sub> =30Hz	-	2.7	-	pA/√Hz
	i <sub>n</sub>	f <sub>0</sub> =1kHz	-	0.7	-	pA/√Hz
Channel Separation	CS	f=1kHz, R <sub>S</sub> =5kΩ	-	110	-	dB

## ■ ELECTRICAL CHARACTERISTICS (D-rank type(Note2), V<sup>+</sup>/V=±15V, Ta=25°C, unless otherwise noted.)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Equivalent Input Noise Voltage	V <sub>NI</sub>	RIAA, R <sub>S</sub> =2.2kΩ	-	-	1.4	μVrms







(Note2) D-rank type is a Equivalent Input Noise Voltage selected product.

## ■ TYPICAL CHARACTERISTICS

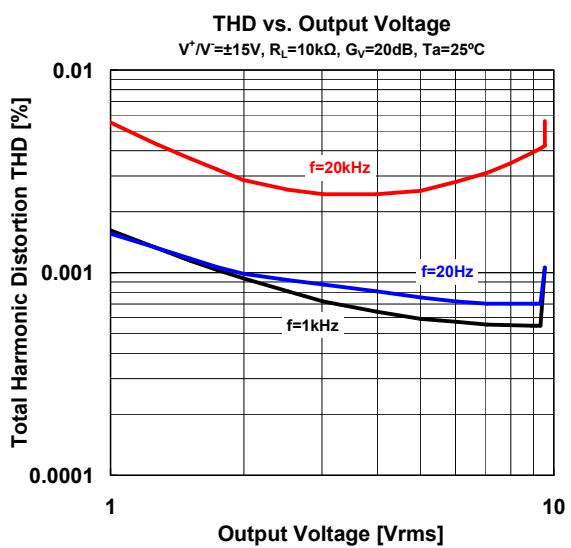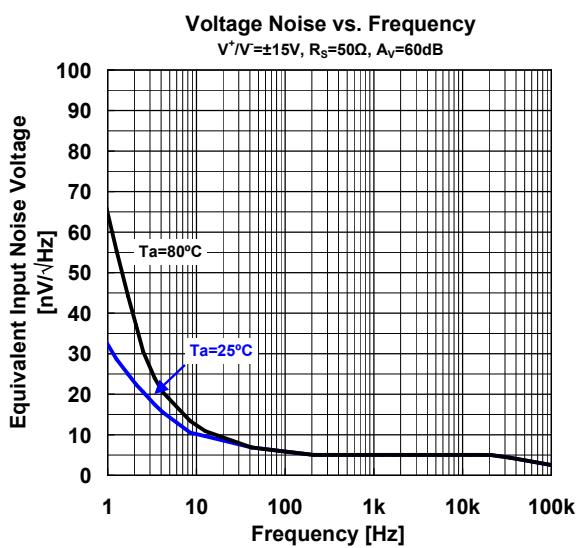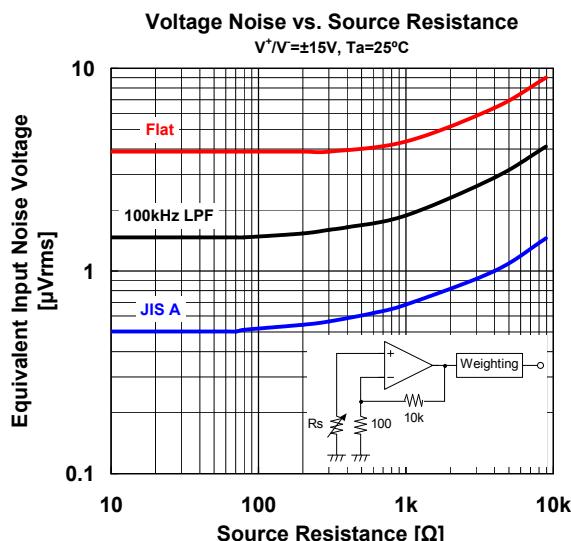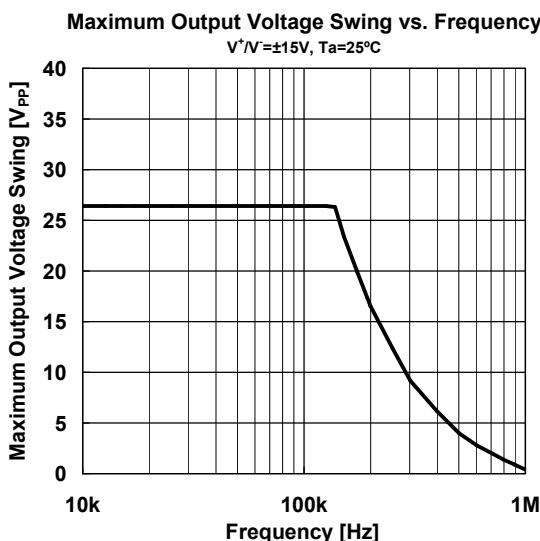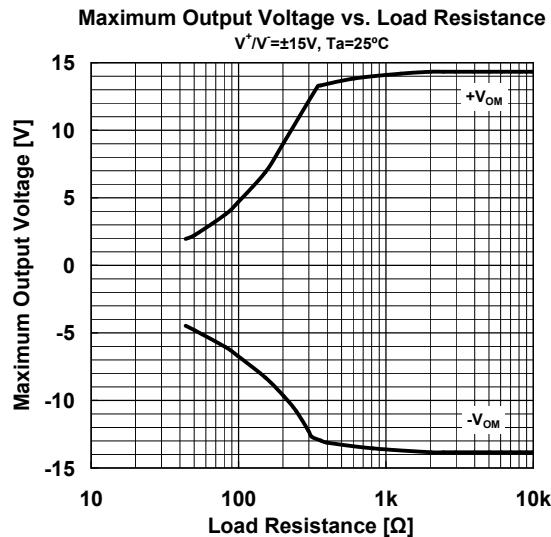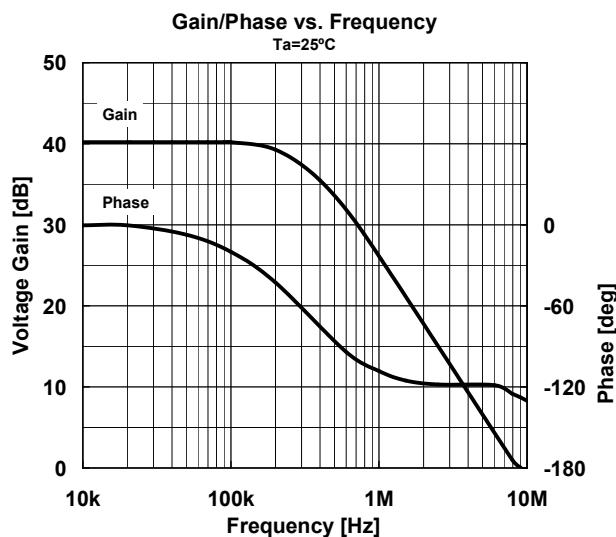


# NJM5532

## ■ TYPICAL CHARACTERISTICS

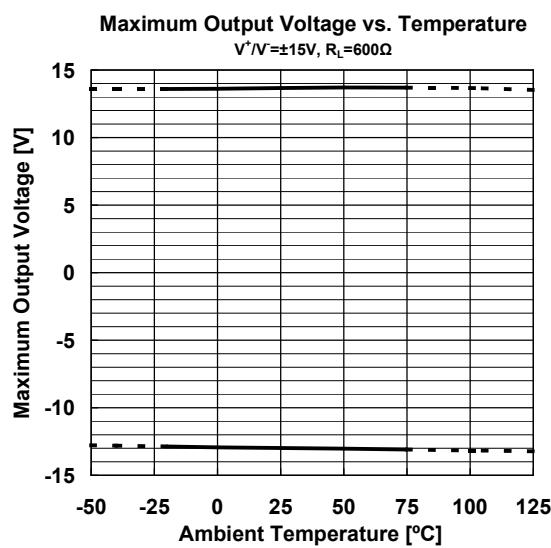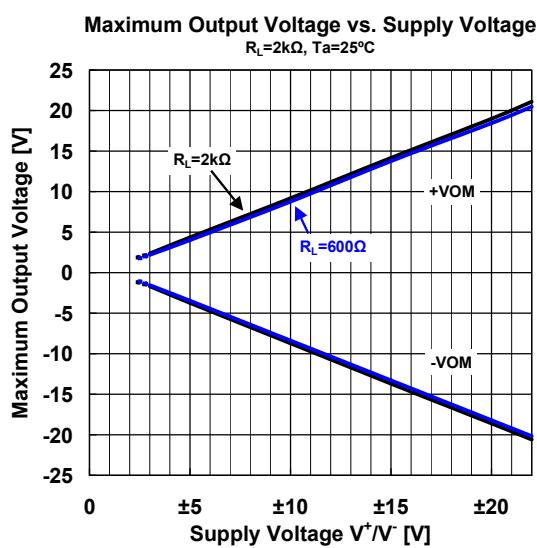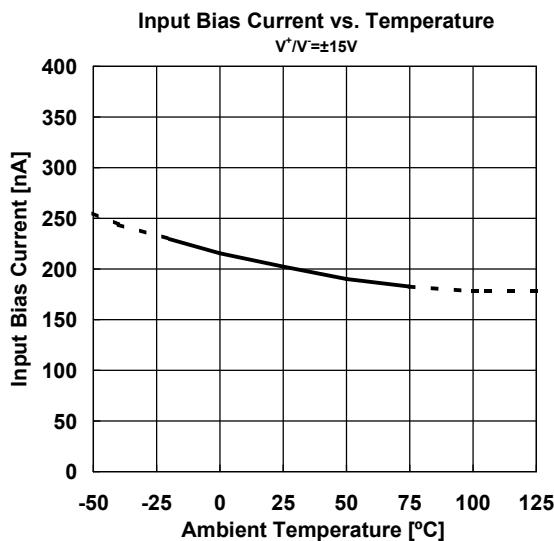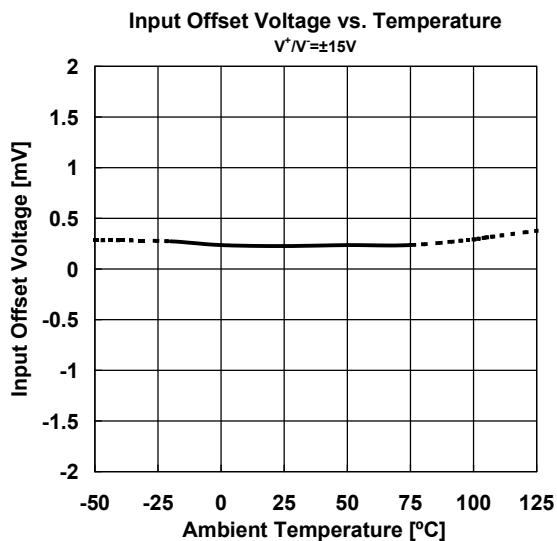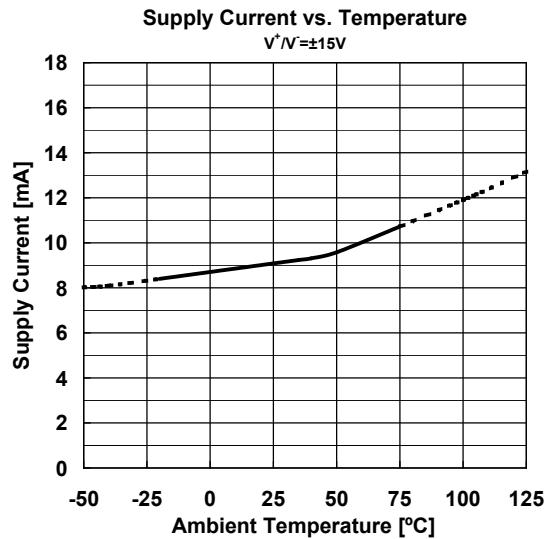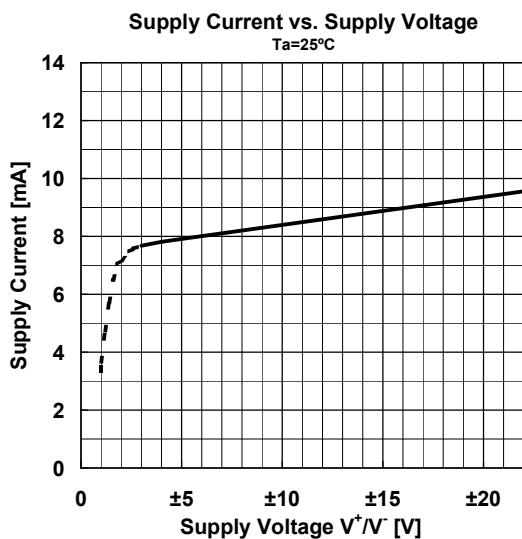


## ■ TEST CIRCUIT

Noise Voltage (RIAA) measurement circuit

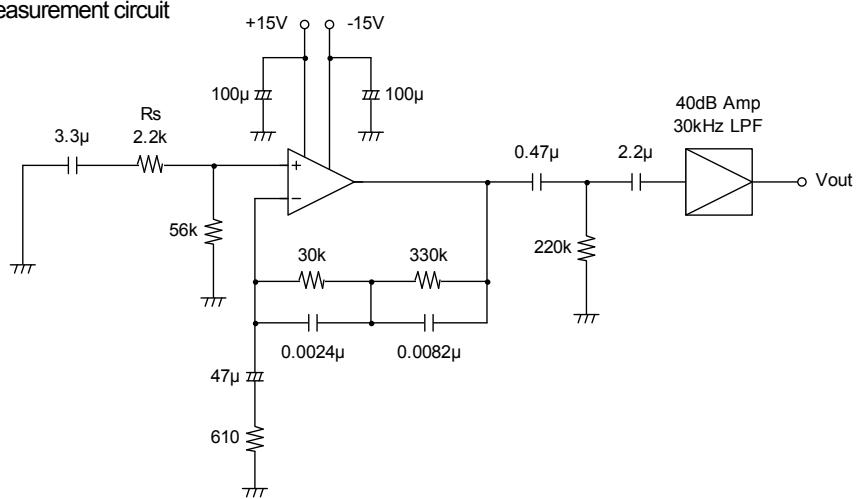

## ■ NOTICE

When used in voltage follower circuit, put a current limit resistor into non-inverting input terminal in order to avoid inside input diode destruction when the power supply is turned on. (ref.Fig.1)

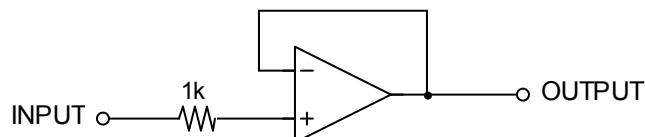

(Fig.1)

**[CAUTION]**  
The specifications on this databook are only given for information, without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.