



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



High Frequency Wire Wound Transformers

EP7 Platforms - SMT



- Power Range:** up to 5W
- Height:** 9.27mm Max
- Footprint:** 13.34mm x 10.7mm Max
- Topology:** Forward and Flyback

Electrical Specifications @ 25°C - Operating Temperature -40°C to +130°C³

Part Number	Parameter	Configuration	Value	Notes
PAT130NL	Pri. Inductance	(3-4)	500µH ± 10%	<p>FLYBACK TRANSFORMER</p>
	Lk. Inductance	(3-4) with (8, 7, 6, 5) shorted	8µH MAX	
	DCR	(3-4)	1750mΩ MAX	
		(6, 5-8, 7)	15mΩ MAX	
	Hi-Pot	Pri-Sec	1500Vrms	
	K1 Factor		9735.2	
PAT131NL	Pri. Inductance	(3-4)	500µH ±10%	<p>FLYBACK TRANSFORMER</p>
	Lk. Inductance	(3-4) with (8, 7, 6, 5) shorted	7.5µH MAX	
	DCR	(3-4)	1750mΩ MAX	
		(6, 5-8, 7)	35mΩ MAX	
	Hi-Pot	Pri-Sec	1500Vrms	
	K1 Factor		9735.2	
PAT132NL	Pri. Inductance	(3-4)	521µH ±10%	<p>FLYBACK TRANSFORMER</p>
	Lk. Inductance	(3-4) with (8, 7, 6, 5) shorted	7.5 µH MAX	
	DCR	(3-4)	1750mΩ MAX	
		(6, 5-8, 7)	100mΩ MAX	
	Hi-Pot	Pri-Sec	1500Vrms	
	K1 Factor		9937.1	

High Frequency Wire Wound Transformers

EP7 Platforms - SMT



Electrical Specifications @ 25°C - Operating Temperature -40°C to +130°C ⁵				
PA1279NL	Pri. Inductance	(3-4)	310 μ H \pm 10%	
	Lk. Inductance	(3-4) with (8, 7, 6, 5) shorted	5 μ H MAX	
	DCR	(3-4)	1600m Ω MAX	
		(6, 5-8, 7)	45 m Ω MAX	
		(2-1)	2600 m Ω MAX	
	Hi-Pot	Pri-Sec	1500Vrms	
K1 Factor		6584.5		
FLYBACK TRANSFORMER				
PA1280NL	Pri. Inductance	(3-4)	310 μ H \pm 10%	
	Lk. Inductance	(3-4) with (8, 7, 6, 5) shorted	5 μ H MAX	
	DCR	(3-4)	1600 m Ω MAX	
		(6, 5-8, 7)	87 m Ω MAX	
		(2-1)	2650 m Ω MAX	
	Hi-Pot	Pri-Sec	1500Vrms	
K1 Factor		6584.5		
FLYBACK TRANSFORMER				
PA1281NL	Pri. Inductance	(3-4)	310 μ H \pm 10%	
	Lk. Inductance	(3-4) with (8, 7, 6, 5) shorted	5 μ H MAX	
	DCR	(3-4)	1600 m Ω MAX	
		(6, 5-8, 7)	550 m Ω MAX	
		(2-1)	2600 m Ω MAX	
	Hi-Pot	Pri-Sec	1500Vrms	
K1 Factor		6584.5		
FLYBACK TRANSFORMER				
PA1825NL	Pri. Inductance	(8-1)	24.5 μ H \pm 10%	
	Lk. Inductance	(8-1) with (2, 3, 4, 5, 6, 7) shorted	110 μ H MAX	
	DCR	(8-1)	50 m Ω MAX	
		(7-2)	50 m Ω MAX	
		(6-3)	110 m Ω MAX	
		(5-4)	160 m Ω MAX	
	Hi-Pot	Pri-Sec	600 Vdc	
K1 Factor		1635.5		
FLYBACK TRANSFORMER				

High Frequency Wire Wound Transformers

EP7 Platforms - SMT



Electrical Specifications @ 25°C - Operating Temperature -40°C to +130°C ⁵				
PA2571NL	Pri. Inductance	(1-4)	100µH ±25%	<p>FORWARD TRANSFORMER</p>
	DCR	(1-4)	85 mΩ MAX	
		(5-7)	8760 mΩ MAX	
		(7-8)	2200 mΩ MAX	
	Hi-Pot	Pri-Sec	500 Vrms	
K1 Factor	93.5			
PA2617NL	Pri. Inductance	(3-4)	22.5 µH ±10%	<p>FLYBACK TRANSFORMER</p>
	Lk. Inductance	(3-4) with (5,7) shorted	0.6 µH MAX	
	DCR	(3-4)	100 mΩ MAX	
		(5-8)	200 mΩ MAX	
		(2-1)	110 mΩ MAX	
	Hi-Pot	Pri-Sec	1500 Vrms	
K1 Factor	1401.9			
PA2626NL	Pri. Inductance	(3-4)	30 µH ±5%	<p>FLYBACK TRANSFORMER</p>
	Lk. Inductance	(3-4) with (8, 7, 6, 5) shorted	0.7 µH MAX	
	DCR	(3-4)	250 mΩ MAX	
		(6, 5-8, 7)	72 mΩ MAX	
		(2-4)	170 mΩ MAX	
	Hi-Pot	Pri-Sec	500 Vrms	
K1 Factor	1168.2			
PA3018NL	Pri. Inductance	(3-4)	48.6µH ±5%	<p>FLYBACK TRANSFORMER</p>
	Lk. Inductance	(3-4) with (8, 7, 6, 5) shorted	0.9 µH MAX	
	DCR	(3-4)	250 mΩ MAX	
		(6, 5-8, 7)	35 mΩ MAX	
		(2-1)	130 mΩ MAX	
	Hi-Pot	Pri-Sec	500 Vdc	
K1 Factor	1892.5			

High Frequency Wire Wound Transformers

EP7 Platforms - SMT



Electrical Specifications @ 25°C - Operating Temperature -40°C to +130°C ²				
PA3019NL	Pri. Inductance	(3-4)	47.2 μ H \pm 5%	<p>FLYBACK TRANSFORMER</p>
	Lk. Inductance	(3-4) with (1, 2, 8, 7, 6, 5) shorted	0.7 μ H MAX	
	DCR	(3-4)	250 m Ω MAX	
		(6, 5-8, 7)	72 m Ω MAX	
		(2-1)	170 m Ω MAX	
	Hi-Pot	Pri-Sec	500 Vrms	
K1 Factor	1838.0			
PA3020NL	Pri. Inductance	(3-4)	56.7 μ H \pm 5%	<p>FLYBACK TRANSFORMER</p>
	Lk. Inductance	(3-4) with (8, 7, 6, 5) shorted	0.98 μ H MAX	
	DCR	(3-4)	400 m Ω MAX	
		(6, 5-8, 7)	200 m Ω MAX	
		(2-1)	110 m Ω MAX	
	Hi-Pot	Pri-Sec	500 Vrms	
K1 Factor	1766.4			
PA3021NL	Pri. Inductance	(3-4)	48.8 μ H \pm 5%	<p>FLYBACK TRANSFORMER</p>
	Lk. Inductance	(3-4) with (8, 7, 6, 5) shorted	0.4 μ H MAX	
	DCR	(3-4)	100m Ω MAX	
		(6, 5-8, 7)	200 m Ω MAX	
		(2-1)	110 m Ω MAX	
	Hi-Pot	Pri-Sec	500 Vrms	
K1 Factor	3040.5			

PRELIMINARY

High Frequency Wire Wound Transformers

EP7 Platforms - SMT

Notes:

1. The temperature of the component (ambient plus temperature rise) must be within the stated operating temperature range.
2. The above transformers and inductors have been tested and approved by Pulse's power IC partners and are sited in the appropriate datasheet or evaluation board documentation at these companies. To determine which IC and IC partners are matched with the above Pulse part numbers please consult the IC Cross Reference on the Pulse website.
3. For flyback topology applications, it is necessary to ensure that the transformer will not saturate in the application. The peak flux density (Bpk) should remain below 2700Gauss. To calculate the peak density, use the following formula:

$$B_{pk} \text{ (Gauss)} = K1_Factor * I_{pk} \text{ (A)}$$

4. In high volt-sec applications, it is important to calculate the core loss of the transformer.

Approximate transformer core loss can be calculated as:

$$\text{CoreLoss (W)} = 2.5E-14 * (\text{Freq_kHz})^{1.63} * (\Delta B_Gauss)^{2.63}$$

where ΔB can be calculated as:


$$\text{For Flyback Topology: } \Delta B = K1_Factor * (A)$$

$$\text{For Forward Topology: } \Delta B = K1_Factor * \text{Volt-}\mu\text{sec}$$

5. Optional Tape & Reel packaging can be ordered by adding a "T" suffix to the part number (i.e. PA1130NL becomes PA1130NLT). Pulse complies with industry standard tape and reel specification EIA481. The tape and reel for this product has a width (W=24mm), pitch (Po=16mm) an depth (Ko=9.8mm).

Mechanical

PAXXXNL

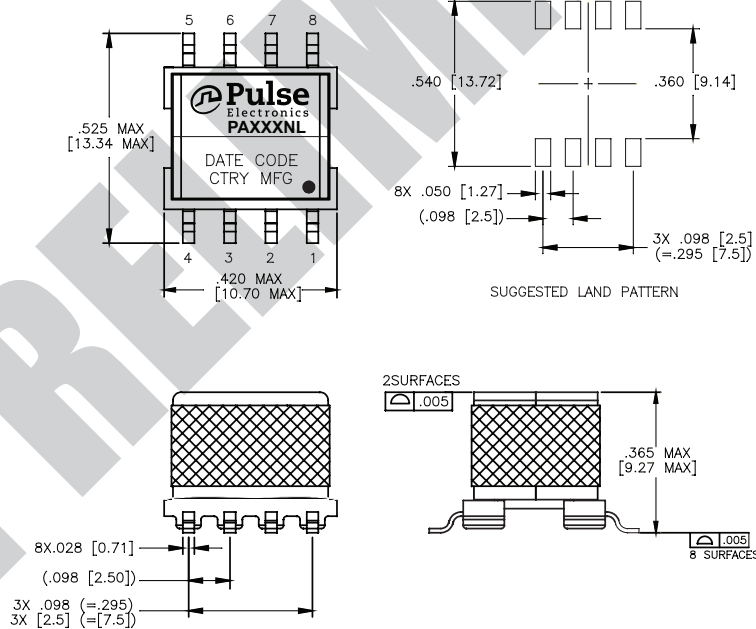

For More Information

Pulse Worldwide Headquarters
12220 World Trade Drive
San Diego, CA
92128
U.S.A.

Pulse Europe
Einsteinstrasse 1
D-71083 Herrenberg
Germany

Pulse China Headquarters
B402, Shenzhen Academy of
Aerospace Technol-
ogy Bldg.
10th Kejinan Road
High-Tech Zone
Nanshan District
Shenzhen, PR China
518057
Tel: 86 755 33966678
Fax: 86 755 33966700

Pulse North China
Room 2704/2705
Super Ocean Finance
Ctr.
2067 Yan An Road
West
Shanghai 200336
China
Tel: 86 21 62787060
Fax: 86 2162786973

Pulse South Asia
135 Joo Seng Road
#03-02
PM Industrial Bldg.
Singapore 368363
Tel: 65 6287 8998
Fax: 65 6287 8998

Pulse North Asia
3F, No. 198
Zhongyuan Road
Zhongli City
Taoyuan County 320
Taiwan R. O. C.
Tel: 886 3 4356768
Fax: 886 3 4356823 (Pulse)
Fax: 886 3 4356820 (FRE)

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners. © Copyright, 2014. Pulse Electronics, Inc. All rights reserved.