



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



# SMT POWER INDUCTORS

## Shielded Drum Core - PL93XX Series




- Height:** 0.157 inches (4.0mm) Max
- Footprint:** 0.410 inches x 0.410 inches (10.5mm x 10.5mm) Max
- Inductance Range:** 0.62μH to 278μH
- Current Rating:** up to 7.6A

### Electrical Specifications @ 25°C — Operating Temperature -55°C to +130°C




Part Numbers	Inductance @ Irated (μH TYP)	Irated <sup>2</sup> (A)	DCR (mΩ)		Inductance @ 0A <sub>DC</sub> (μH)	Saturation Current <sup>3</sup> (A) @25°C	Heating Current <sup>4</sup> (A)
			TYP	MAX			
PL9301	0.62	7.60	4.2	5.5	0.68±25%	10.00	7.60
PL9302	1.2	7.10	5.6	7.3	1.3±25%	8.00	7.10
PL9303	1.9	5.80	8.4	10.9	2.2±25%	6.15	5.80
PL9304	2.8	5.20	10.2	13.3	3.3±25%	5.80	5.20
PL9305	4.0	4.70	15.1	19.6	4.7±25%	5.40	4.70
PL9306	5.4	3.70	20.8	27.0	6.0±25%	4.50	3.70
PL9307	6.9	3.50	23.7	30.8	7.6±25%	4.00	3.50
PL9308	8.0	3.40	26.5	33.2	10±20%	3.80	3.40
PL9309	11	3.00	36.1	45.2	12±20%	3.40	3.00
PL9310	12	2.80	39.5	49.4	15±20%	3.10	2.80
PL9311	19	2.30	62	77	22±20%	2.80	2.30
PL9312	25	2.10	71	89	27±20%	2.30	2.10
PL9313	38	1.65	113	142	47±20%	2.10	1.65
PL9314	55	1.32	170	212	68±20%	1.50	1.32
PL9315	83	1.10	262	328	100±20%	1.35	1.10
PL9316	123	0.88	400	500	150±20%	1.15	0.88
PL9317	178	0.73	591	739	220±20%	0.92	0.73
PL9318	278	0.60	906	1133	330±20%	0.70	0.60

\*Inductance at 0A<sub>DC</sub> tolerance on indicated part numbers is ±30%; tolerance is ±20% on all other parts. Optional Tape & Reel packaging can be ordered by adding a "T" suffix to the part number (i.e. PL9301 becomes PL9301T). **NOTES FROM TABLE:** (See back page)

## Mechanical






NOTE: Pin 3 and Pin 4 are for mechanical connection only.

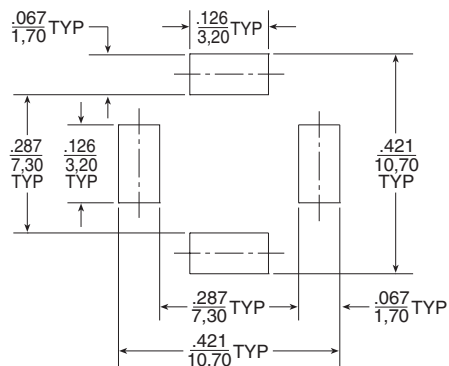

SUGGESTED PAD LAYOUT

## Schematic

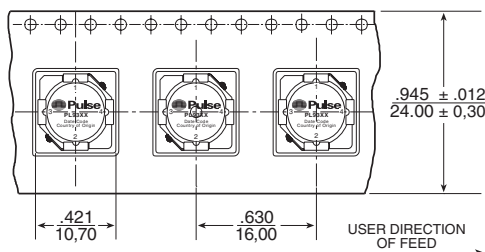

**Weight** . . . . . 2.5 grams  
**Tape & Reel** . . . . . 400/reel  
**Dimensions:** Inches  
 mm  
 Unless otherwise specified,  
 all tolerances are ± .010  
 0,25



# SMT POWER INDUCTORS


## Shielded Drum Core - PL93XX Series



### Notes from Tables

1. Temperature of the component (ambient plus temperature rise) must be within specified operating temperature range.
2. The rated current as listed is either the saturation current or the heating current depending on which value is lower.
3. The saturation current is the current which causes the inductance to drop to 75% of its initial inductance at zero bias. This current is determined by placing the component at room ambient (25°C), and applying a short duration pulse current (to eliminate self-heating effects) to the component.
4. The heating current is the DC current, which causes the temperature of the part to increase by approximately 40°C. This current is determined by extending the terminals of the component with 30mm length 28 gauge buss wires and applying the current to the device for 30 minutes. The temperature is measured by placing the thermocouple between the winding and the shield.
5. In high volt\*time applications, additional heating in the component can occur due to core losses in the inductor which may necessitate derating the current in order to limit the temperature rise of the component. In order to determine the approximate total loss (or temperature rise) for a given application, both copper losses and core losses should be taken into account.

### Inductance vs Current Characteristics

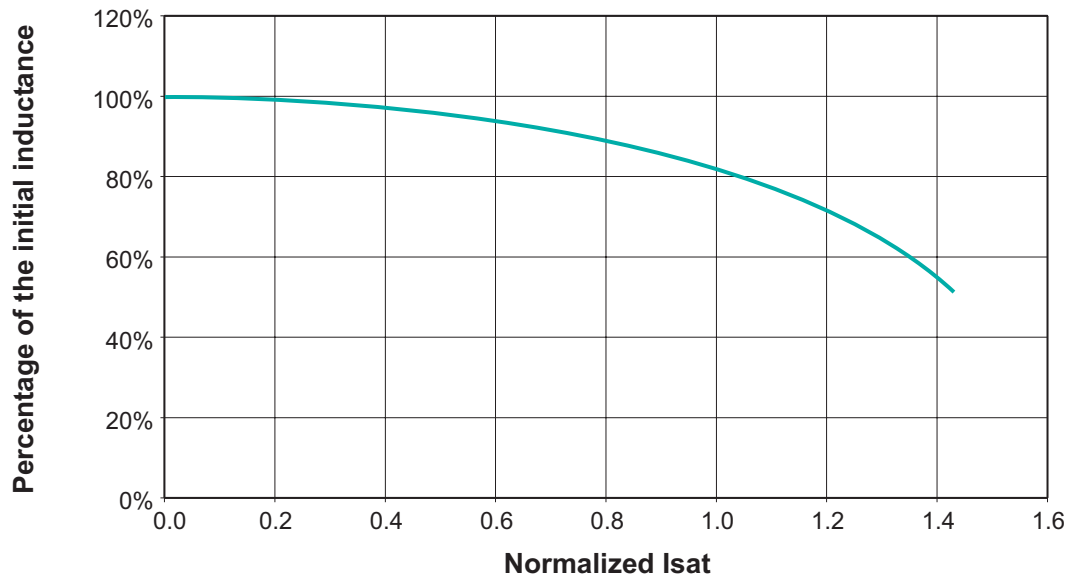

### For More Information:

**Pulse Worldwide Headquarters**  
 2 Pearl Buck Court  
 Bristol, PA 19007  
 U.S.A.  
[www.pulseeng.com](http://www.pulseeng.com)

**Pulse Europe**  
 Einsteinstrasse 1  
 D-71083 Herrenberg  
 Germany

**Pulse China Headquarters**  
 B402, Shenzhen  
 Tech-Innovation International  
 Tenth Kejian Rd.  
 High-Tech Industrial Park  
 Nanshan District, Shenzhen  
 China  
 Tel: 86 755 33966678  
 Fax: 86 755 33966700

**Pulse North China**  
 Room 1503  
 XinYin Building  
 No. 888 YiShan Rd.  
 Shanghai 200233  
 China  
 Tel: 86 21 54643211/2  
 Fax: 86 21 54643210

**Pulse South Asia**  
 150 Kampong Ampat  
 #07-01/02  
 KA Centre  
 Singapore 368324

**Pulse North Asia**  
 No. 26  
 Kao Ching Rd.  
 Yang Mei Chen  
 Taoyuan Hsien  
 Taiwan, R. O. C.

Tel: 215 781 6400  
 Fax: 215 781 6403

Tel: 49 7032 7806 0  
 Fax: 49 7032 7806 12

Tel: 65 6287 8998  
 Fax: 65 6280 0080

Tel: 886 3 4641811  
 Fax: 886 3 4641911

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners. © Copyright, 2007. Pulse Engineering, Inc. All rights reserved.