



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Intellimod™ Module


Three Phase + Brake
IGBT Inverter Output
75 Amperes/600 Volts

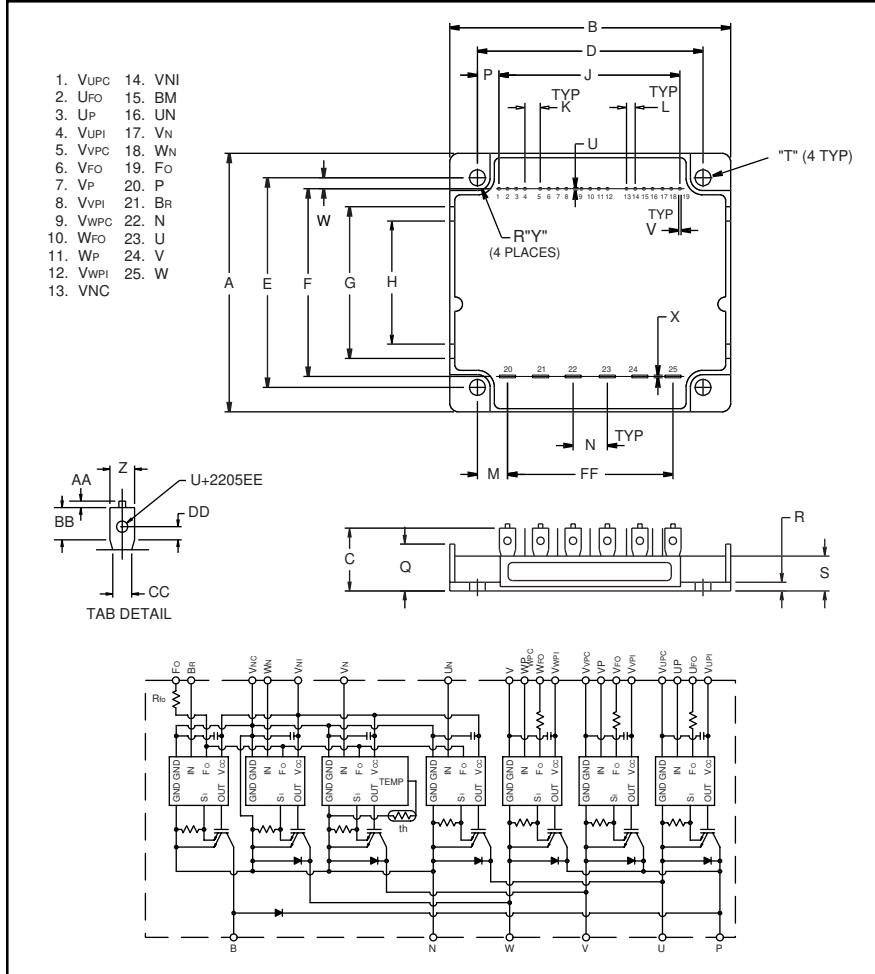

Outline Drawing and Circuit Diagram

Dimensions	Inches	Millimeters
A	2.76±0.04	70.0±1.0
B	4.29±0.04	109.0±1.0
C	0.83±0.04	21.0±1.0
D	3.78±0.02	96.0±0.5
E	2.31±0.02	58.5±0.5
F	2.22±0.03	56.5±0.8
G	1.61	41.0
H	1.30	33.0
J	2.40±0.03	60.96±0.8
K	0.30	7.62
L	0.10±0.01	2.54±0.25
M	0.66	16.75
N	0.49±0.01	12.5±0.25
P	0.69	17.52
Q	0.53	13.5

Dimensions	Inches	Millimeters
R	0.21	5.4
S	0.39	10.0
T	0.18	4.5
U	0.02	0.6
V	0.02	0.4
W	0.03	0.75
X	0.03	0.8
Y	0.20	5.0
Z	0.25	6.35
AA	0.04	1.0
BB	0.39	9.95
CC	0.24	6.0
DD	0.21	5.4
EE	0.07	1.65
FF	2.46±0.03	62.5±0.08

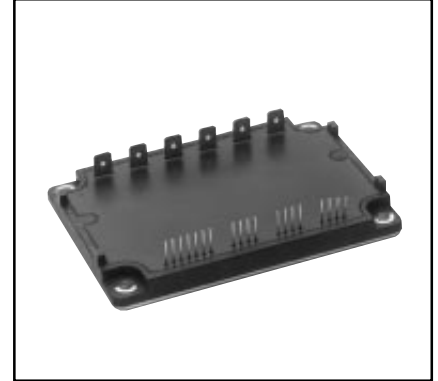

Description:

Powerex Intellimod™ Intelligent Power Modules are isolated base modules designed for power switching applications operating at frequencies to 20kHz. Built-in control circuits provide optimum gate drive and protection for the IGBT and free wheel diode power devices.

Features:

- Complete Output Power Circuit
- Gate Drive Circuit
- Protection Logic
 - Short Circuit
 - Over Current
 - Over Temperature
 - Under Voltage

Applications:

- Inverters
- UPS
- Motion/Servo Control
- Power Supplies

Ordering Information:

Example: Select the complete part number from the table below -i.e. PM75RSK060 is a 600V, 75 Ampere Intellimod™ Intelligent Power Module.

Type	Current Rating Amperes	V _{CEs} Volts (x 10)
PM	75	60



Powerex, Inc., 200 Hillis Street, Youngwood, Pennsylvania 15697-1800 (724) 925-7272

PM75RSK060
Intellimod™ Module
Three Phase + Brake IGBT Inverter Output
75 Amperes/600 Volts

Absolute Maximum Ratings, $T_j = 25\text{ }^\circ\text{C}$ unless otherwise specified

Characteristics	Symbol	PM25RSK120	Units
Junction Temperature	T_j	-20 to 150	$^\circ\text{C}$
Storage Temperature	T_{stg}	-40 to 125	$^\circ\text{C}$
Case Operating Temperature	T_C	-20 to 100	$^\circ\text{C}$
Mounting Torque M4 Mounting Screws	-	13	in-lb
Module Weight (Typical)	-	150	Grams
Supply Voltage Protected by OC and SC ($V_D = 13.5 \sim 16.5\text{V}$, Inverter Part)	$V_{CC(prot)}$	400	Volts
Isolation Voltage, AC 1 minute, 60Hz Sinusoidal	V_{RMS}	2500	Volts

Control Sector

Supply Voltage Applied between ($V_{UP1}-V_{UPC}$, $V_{VP1}-V_{VPC}$, $V_{WP1}-V_{WPC}$, $V_{N1}-V_{NC}$)	V_D	20	Volts
Input Voltage Applied between (U_P , V_P , W_P , U_N , V_N , W_N , B_r)	V_{CIN}	20	Volts
Fault Output Supply Voltage (Applied between F_O and V_{NC})	V_{FO}	20	Volts
Fault Output Current	I_{FO}	20	mA

IGBT Inverter Sector

Collector-Emitter Voltage ($V_D = 15\text{V}$, $V_{CIN} = 15\text{V}$)	V_{CES}	600	Volts
Collector Current, \pm	I_C	75	Amperes
Peak Collector Current, \pm	I_{CP}	150	Amperes
Supply Voltage (Applied between P-N)	V_{CC}	450	Volts
Supply Voltage, Surge (Applied between P-N, Surge Value)	$V_{CC(surge)}$	500	Volts
Collector Dissipation	P_C	125	Watts

Brake Sector

Collector-Emitter Voltage ($V_D = 15\text{V}$, $V_{CIN} = 15\text{V}$)	V_{CES}	600	Volts
Collector Current, \pm	I_C	30	Amperes
Peak Collector Current, \pm	I_{CP}	60	Amperes
Supply Voltage (Applied between P-N)	V_{CC}	450	Volts
Supply Voltage, Surge (Applied between P-N, Surge Value)	$V_{CC(surge)}$	500	Volts
Collector Dissipation	P_C	75	Watts
Diode Forward Current	I_F	30	Amperes
Diode DC Reverse Voltage	$V_{R(DC)}$	600	Volts

PM75RSK060
Intellimod™ Module
Three Phase + Brake IGBT Inverter Output
75 Amperes/600 Volts

Electrical and Mechanical Characteristics, $T_j = 25\text{ °C}$ unless otherwise specified

Characteristics	Symbol	Test Conditions	Min.	Typ.	Max.	Units
Control Sector						
Over Current Trip Level Inverter Part	OC	$-20\text{ °C} \leq T_j \leq 125\text{ °C}$	115	161	–	Amperes
Over Current Trip Level Brake Part			39	53	–	Amperes
Short Circuit Trip Level Inverter Part	SC	$-20\text{ °C} \leq T_j \leq 125\text{ °C}$	–	241	–	Amperes
Short Circuit Trip Level Brake Part			–	79	–	Amperes
Over Current Delay Time	$t_{\text{off(OC)}}$	$V_D = 15\text{V}$	–	10	–	μS
Over Temperature Protection	OT	Trip Level	100	110	120	°C
	OT_R	Reset Level	–	90	–	°C
Supply Circuit Under Voltage Protection	UV	Trip Level	11.5	12.0	12.5	Volts
	UV_R	Reset Level	–	12.5	–	Volts
Supply Voltage	V_D	Applied between $V_{\text{UP1}}-V_{\text{UPC}}$, $V_{\text{VP1}}-V_{\text{VPC}}$, $V_{\text{WP1}}-V_{\text{WPC}}$, $V_{\text{N1}}-V_{\text{NC}}$	13.5	15.0	16.5	Volts
Circuit Current	I_D	$V_D = 15\text{V}$, $V_{\text{CIN}} = 15\text{V}$, $V_{\text{N1}}-V_{\text{NC}}$	–	44	60	mA
		$V_D = 15\text{V}$, $V_{\text{CIN}} = 15\text{V}$, $V_{\text{XP1}}-V_{\text{XPC}}$	–	13	18	mA
Input ON Threshold Voltage	$V_{\text{CIN(on)}}$	Applied between	1.2	1.5	1.8	Volts
Input OFF Threshold Voltage	$V_{\text{CIN(off)}}$	$U_P, V_P, W_P, U_N, V_N, W_N, B_r$	1.7	2.0	2.3	Volts
PWM Input Frequency	f_{PWM}	3- \emptyset Sinusoidal	5	15	20	kHz
Fault Output Current	$I_{\text{FO(H)}}$	$V_D = 15\text{V}$, $V_{\text{FO}} = 15\text{V}$	–	–	0.01	mA
	$I_{\text{FO(L)}}$	$V_D = 15\text{V}$, $V_{\text{FO}} = 15\text{V}$	–	10	15	mA
Minimum Fault Output Pulse Width	t_{FO}	$V_D = 15\text{V}$	1.0	1.8	–	mS

PM75RSK060
Intellimod™ Module
Three Phase + Brake IGBT Inverter Output
75 Amperes/600 Volts

Electrical and Mechanical Characteristics, $T_j = 25^\circ\text{C}$ unless otherwise specified

Characteristics	Symbol	Test Conditions	Min.	Typ.	Max.	Units
IGBT Inverter Sector						
Collector-Emitter Cutoff Current	I_{CES}	$V_{CE} = V_{CES}, V_D = 15\text{V}, T_j = 25^\circ\text{C}$	-	-	1	mA
		$V_{CE} = V_{CES}, V_D = 15\text{V}, T_j = 125^\circ\text{C}$	-	-	10	mA
FWDi Forward Voltage	V_{EC}	$-I_C = 75\text{A}, V_D = 15\text{V}, V_{CIN} = 15\text{V}$	-	2.2	3.3	Volts
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	$V_D = 15\text{V}, V_{CIN} = 0\text{V}, I_C = 75\text{A}, T_j = 25^\circ\text{C}$	-	1.8	2.7	Volts
		$V_D = 15\text{V}, V_{CIN} = 0\text{V}, I_C = 75\text{A}, T_j = 125^\circ\text{C}$	-	1.85	2.78	Volts
Inductive Load Switching Times	t_{on}		0.4	0.8	2.0	μS
	t_{rr}	$V_D = 15\text{V}, V_{CIN} = 0 \sim 15\text{V},$	-	0.15	0.3	μS
	$t_{C(on)}$	$V_{CC} = 300\text{V}, I_C = 75\text{A},$	-	0.4	1.0	μS
	t_{off}	$T_j = 125^\circ\text{C}, \text{ Inductive Load}$	-	2.0	2.9	μS
	$t_{C(off)}$		-	0.5	1.0	μS

Brake Sector

Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	$V_D = 15\text{V}, V_{CIN} = 0\text{V}, I_C = 30\text{A}, T_j = 25^\circ\text{C}$	-	1.8	2.7	Volts
		$V_D = 15\text{V}, V_{CIN} = 0\text{V}, I_C = 30\text{A}, T_j = 125^\circ\text{C}$	-	1.9	2.8	Volts
FWDi Forward Voltage	V_{EC}	$-I_C = 15\text{A}, V_D = 15\text{V}, V_{CIN} = 15\text{V}$	-	1.7	2.7	Volts
Collector-Emitter Cutoff Current	I_{CES}	$V_{CE} = V_{CES}, V_D = 15\text{V}, T_j = 25^\circ\text{C}$	-	-	1	mA
		$V_{CE} = V_{CES}, V_D = 15\text{V}, T_j = 125^\circ\text{C}$	-	-	10	mA

Thermal Characteristics

Characteristic	Symbol	Condition	Min.	Typ.	Max.	Units
Junction to Case Thermal Resistance	$R_{th(j-c)Q}$	Each Inverter IGBT	-	-	1.0	$^\circ\text{C/Watt}$
	$R_{th(j-c)D}$	Each Inverter FWDi	-	-	0.95	$^\circ\text{C/Watt}$
	$R_{th(j-c)Q}$	Each Brake IGBT	-	-	1.66	$^\circ\text{C/Watt}$
	$R_{th(j-c)D}$	Each Brake FWDi	-	-	1.9	$^\circ\text{C/Watt}$
Contact Thermal Resistance	$R_{th(c-f)}$	Case to Fin Per Module Thermal Grease Applied	-	-	0.036	$^\circ\text{C/Watt}$

Recommended Conditions for Use








Characteristic	Symbol	Condition	Value	Units
Supply Voltage	V_{CC}	Applied across P-N Terminals	0 ~ 800	Volts
	V_D	Applied between $V_{UP1}-V_{UPC}, V_{N1}-V_{NC}, V_{VP1}-V_{VPC}, V_{WP1}-V_{WPC}$	15 ± 1.5	Volts
Input ON Voltage	$V_{CIN(on)}$	Applied between	0 ~ 0.8	Volts
Input OFF Voltage	$V_{CIN(off)}$	$U_P, V_P, W_P, U_N, V_N, W_N, B_r$	$4.0 \sim V_D$	Volts
PWM Input Frequency	f_{PWM}	Using Application Circuit	5 ~ 20	kHz
Minimum Dead Time	t_{DEAD}	Input Signal	≥ 2.5	μS



Powerex, Inc., 200 Hillis Street, Youngwood, Pennsylvania 15697-1800 (724) 925-7272



PM75RSK060
Intellimod™ Module
Three Phase + Brake IGBT Inverter Output
75 Amperes/600 Volts

Inverter Sector

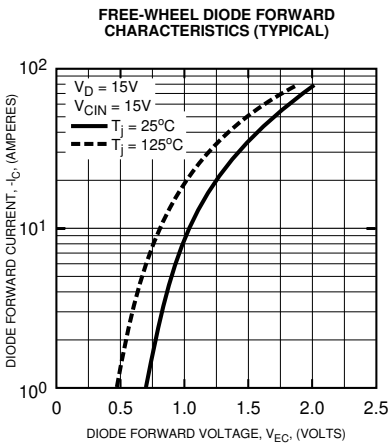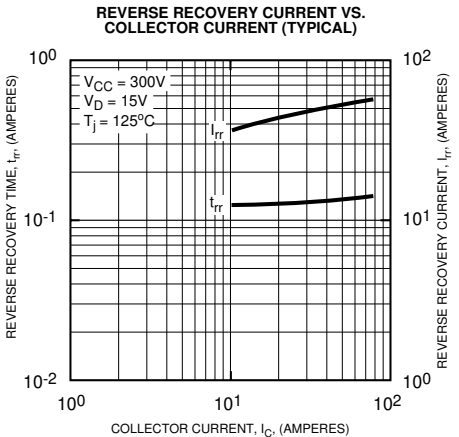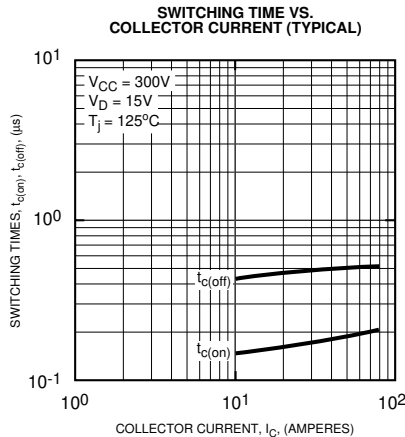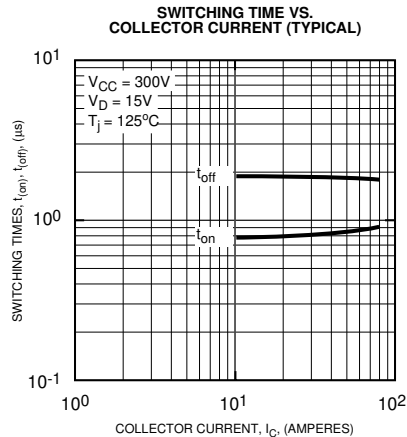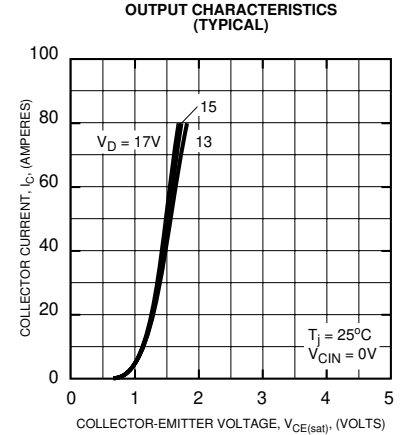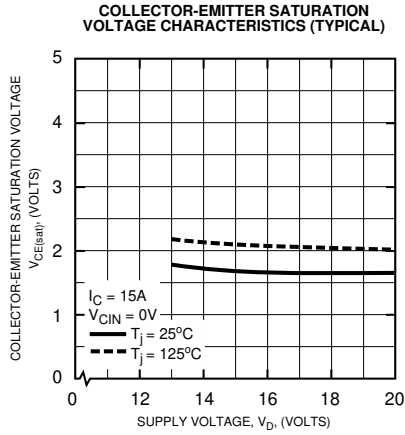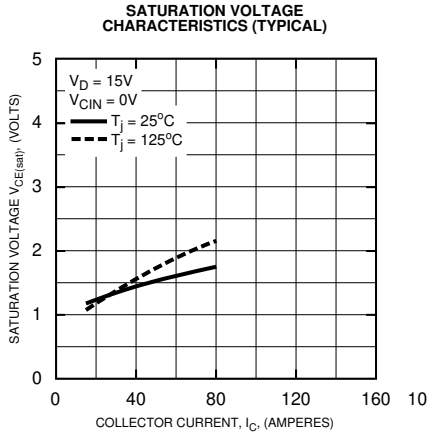

PM75RSK060
Intellimod™ Module
Three Phase + Brake IGBT Inverter Output
75 Amperes/600 Volts

Inverter Sector

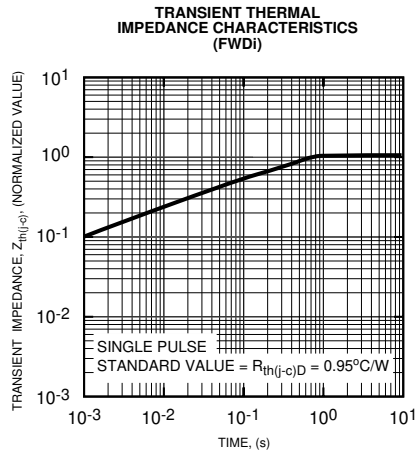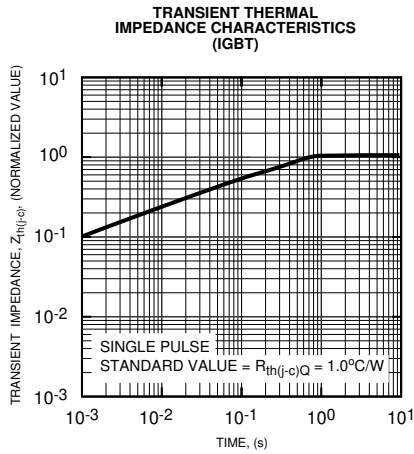

Brake Sector

