



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



# TDK·Lambda

## PXB15-xxWSxx

### Single Output 15 Watt DC/DC Converters

(with wide range input)



The PXB15 series is approved to UL/CSA/EN/IEC 60950-1.

#### Table of contents

Absolute Maximum Rating	P2	Short Circuit Protection	P26
Output Specification	P2	Thermal Consideration	P26
Input Specification	P3	Heat Sink Consideration	P26
General Specification	P4	Remote ON/OFF Control	P27
Characteristic Curves	P5	Mechanical Data	P28
Testing Configurations	P21	Recommended Pad Layout	P29
EMC Consideration	P22	Soldering Considerations	P30
Input Source Impedance	P24	Packaging Information	P30
Output Over Current Protection	P24	Part Number Structure	P31
Output Over Voltage Protection	P24	Safety and Installation Instruction	P31
Output Voltage Adjustment	P25	MTBF and Reliability	P31

Absolute Maximum Rating				
Parameter	Model	Min	Max	Unit
Input Voltage	24WSXX 48WSXX		36	V <sub>DC</sub>
			75	
Transient (100mS)	24WSXX 48WSXX		50	
			100	
Input Voltage Variation (complies with ETS300 132 part 4.4)	All		5	V/mS
Operating Ambient Temperature (with derating)	All	-40	85	°C
Operating Case Temperature			105	°C
Storage Temperature	All	-55	125	°C

Output Specification					
Parameter	Model	Min	Typ	Max	Unit
Output Voltage Range (Vin = Vin(nom) ; Full Load ; T <sub>A</sub> =25 °C)	XXWS3P3	3.267	3.3	3.333	V <sub>DC</sub>
	XXWS05	4.95	5	5.05	
	XXWS12	11.88	12	12.12	
	XXWS15	14.85	15	15.15	
Voltage Adjustability(See Page 25)	All	-10		+10	%
Output Regulation Line (Vin(min) to Vin(max) at Full Load) Load (0% to 100% of Full Load)	All	-0.2		+0.2	%
		-0.2		+0.2	
Output Ripple & Noise(See Page 21) Peak-to-Peak (20MHz bandwidth) (Measured with a 1uF M/C and a 10uF T/C )	XXWS3P3		75		mV <sub>PP</sub>
	XXWS05				
	XXWS12		100		
	XXWS15				
Temperature Coefficient	All	-0.02		+0.02	%/ °C
Output Voltage Overshoot (Vin(min) to Vin(max) ; Full Load ; T <sub>A</sub> =25 °C)	All		0	3	% V <sub>OUT</sub>
Dynamic Load Response (Vin = Vin(nom) ; T <sub>A</sub> =25 °C) Load step change from 75% to 100% or 100 to 75% of Full Load Peak Deviation Settling Time (V <sub>OUT</sub> □ 10% peak deviation)	All		300		mV
	All		250		μS
Output Current	XXWS3P3	0		4000	mA
	XXWS05	0		3000	
	XXWS12	0		1300	
	XXWS15	0		1000	
Output Over Voltage Protection (Voltage Clamped)	XXWS3P3	3.7		5.4	V <sub>DC</sub>
	XXWS05	5.6		7.0	
	XXWS12	13.5		19.6	
	XXWS15	16.8		20.5	
Output Over Current Protection	All		150		% FL
Output Short Circuit Protection	All	Hiccup, automatic recovery			


Input Specification					
Parameter	Model	Min	Typ	Max	Unit
Operating Input Voltage	24WSXX	9	24	36	V <sub>DC</sub>
	48WSXX	18	48	75	
Input Current (Maximum value at Vin = Vin(nom); Full Load)	24WS3P3			688	mA
	24WS05			762	
	24WS12			783	
	24WS15			753	
	48WS3P3			336	
	48WS05			382	
	48WS12			392	
Input Standby Current (Typical value at Vin = Vin(nom) ; No Load)	24WS3P3		50		mA
	24WS05		70		
	24WS12		20		
	24WS15		20		
	48WS3P3		40		
	48WS05		40		
	48WS12		15		
Under Voltage Lockout Turn-on Threshold	24WSXX			9	V <sub>DC</sub>
	48WSXX			18	
Under Voltage Lockout Turn-off Threshold	24WSXX		8		V <sub>DC</sub>
	48WSXX		16		
Input Reflected Ripple Current (See Page 21) (5 to 20MHz, 12μH source impedance)	All		30		mA <sub>P-P</sub>
Start Up Time (Vin = Vin(nom) and constant resistive load)					mS
	Power up	All		30	
	Remote ON/OFF			30	
Remote ON/OFF Control (See Page 27) (The ON/OFF pin voltage is referenced to -V <sub>IN</sub> )	All	Negative Logic DC-DC ON(Short)	0	1.2	V <sub>DC</sub>
		DC-DC OFF(Open)	3	15	
		Positive Logic DC-DC ON(Open)	3	15	
		DC-DC OFF(Short)	0	1.2	
Remote Off Input Current	All		2.5		mA
Input Current of Remote Control Pin	All	-0.5		1.0	mA

General Specification					
Parameter	Model	Min	Typ	Max	Unit
Efficiency(See Page 21) (Vin = Vin(nom) ; Full Load ; TA=25 °C)	24WS3P3		86		%
	24WS05		86		
	24WS12		87		
	24WS15		87		
	48WS3P3		86		
	48WS05		86		
	48WS12		87		
	48WS15		87		
Isolation Voltage Input to Output Input (Output) to Case	All	1600 1000			V <sub>DC</sub>
Isolation Resistance	All	1			GΩ
Isolation Capacitance	All			1000	pF
Switching Frequency	All		400		KHz
Weight	All		15		g
MTBF(See Page 31) Bellcore TR-NWT-000332, T <sub>C</sub> =40 °C MIL-HDBK-217F	All		1.330×10 <sup>6</sup> 5.630×10 <sup>5</sup>		hours




Characteristic Curves

All test conditions are at 25 °C. PXB15-24WS3P3

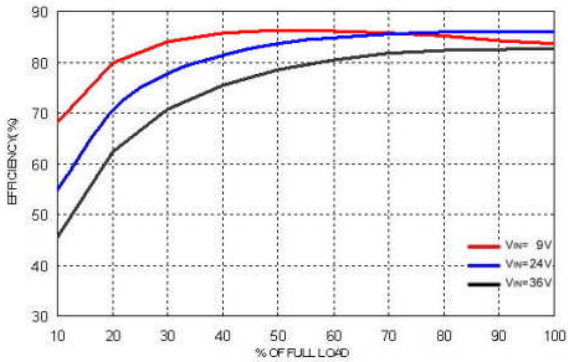


Efficiency versus Output Current

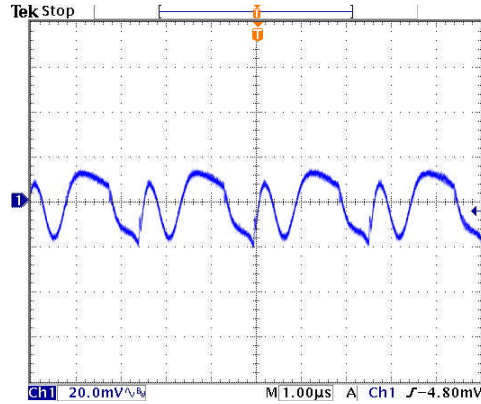


Typical Output Ripple and Noise.


Vin = Vin(nom) ; Full Load

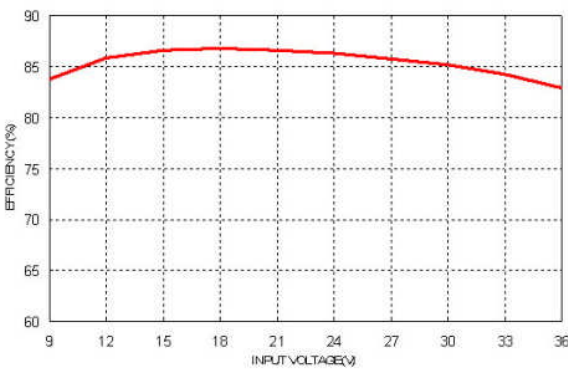

Efficiency versus Input Voltage. Full Load

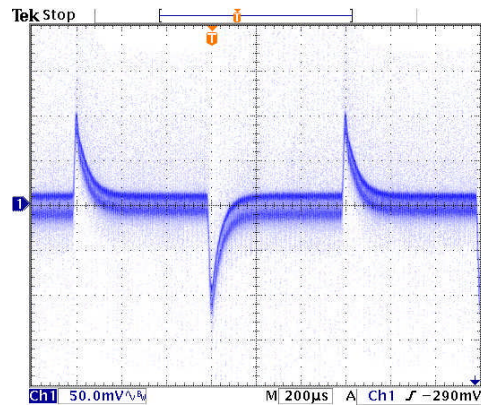


Transient Response to Dynamic Load Change from 100% to 75% to 100% of Full Load ; Vin = Vin(nom)

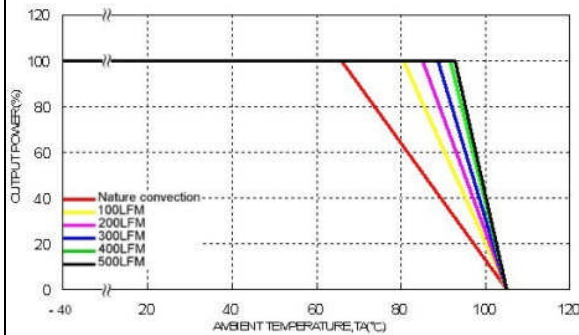

Derating Output Current versus Ambient Temperature and Airflow

Vin = Vin(nom)

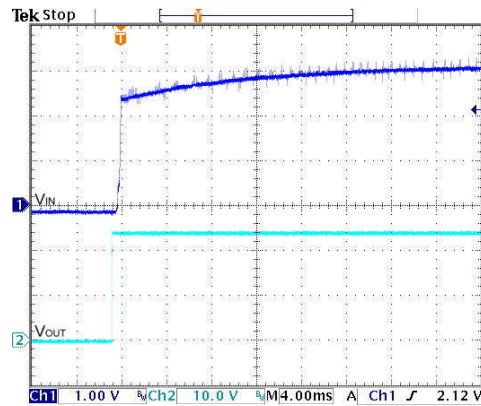


Typical Input Start-Up and Output Rise Characteristic


Vin = Vin(nom) ; Full Load

Characteristic Curves (Continued)


All test conditions are at 25 °C. PXB15-24WS3P3

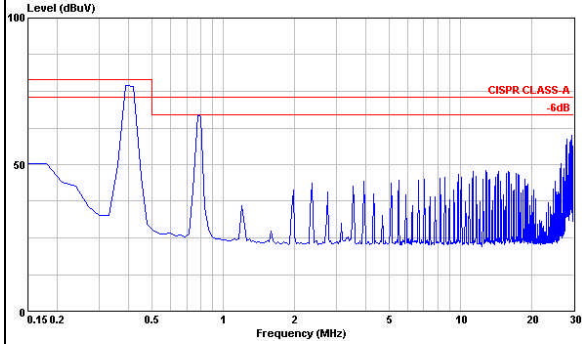


Conduction Emission of EN55022 Class A  
 $V_{in} = V_{in(nom)}$  ; Full Load

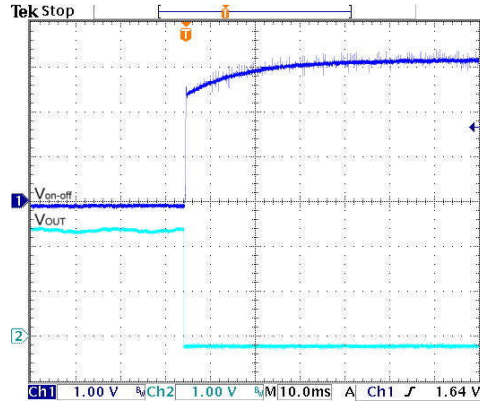


Using ON/OFF Voltage Start-Up and  $V_o$  Rise Characteristic  
 $V_{in} = V_{in(nom)}$  ; Full Load

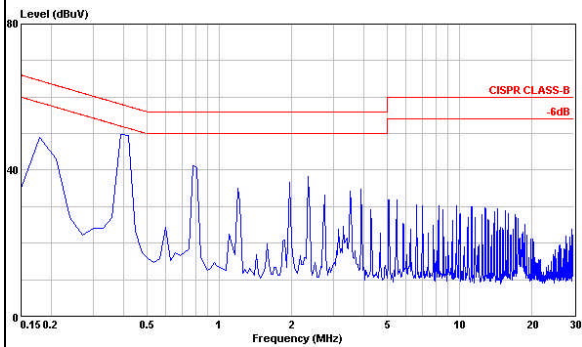

Conduction Emission of EN55022 Class B  
 $V_{in} = V_{in(nom)}$  ; Full Load

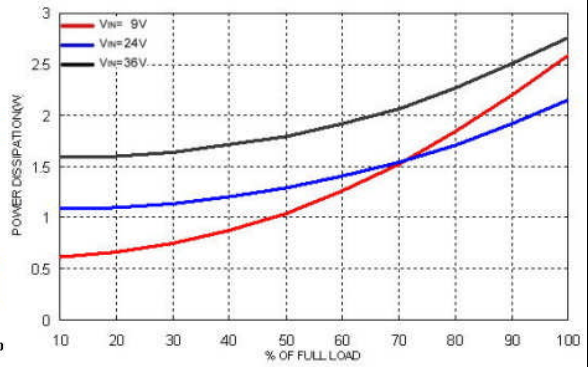


Power Dissipation versus Output Current

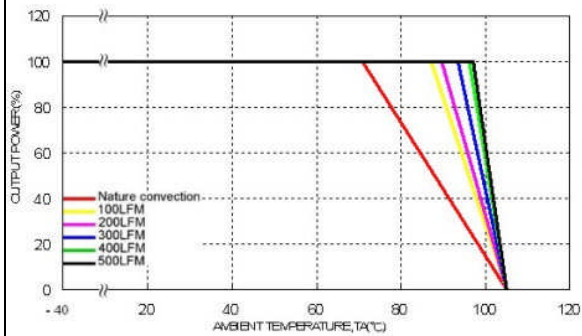


Derating Output Current Versus Ambient Temperature with Heat-Sink  
and Airflow,  $V_{in} = V_{in(nom)}$

Characteristic Curves (Continued)

All test conditions are at 25 °C. PXB15-24WS05

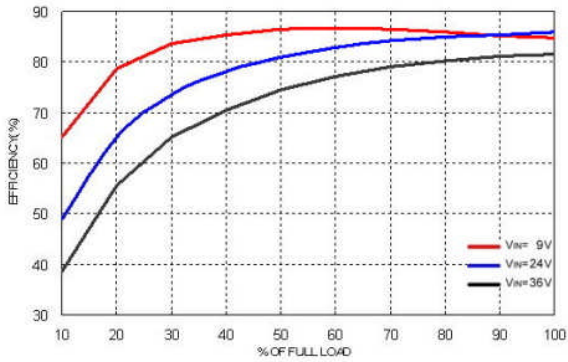


Efficiency versus Output Current

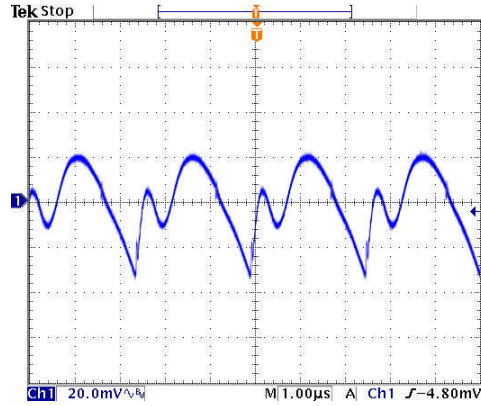


Typical Output Ripple and Noise.


Vin = Vin(nom) ; Full Load

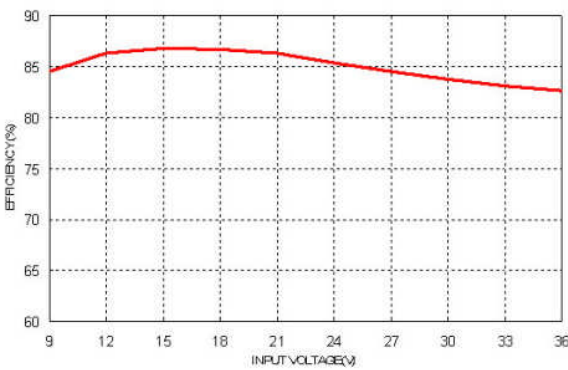


Efficiency versus Input Voltage. Full Load

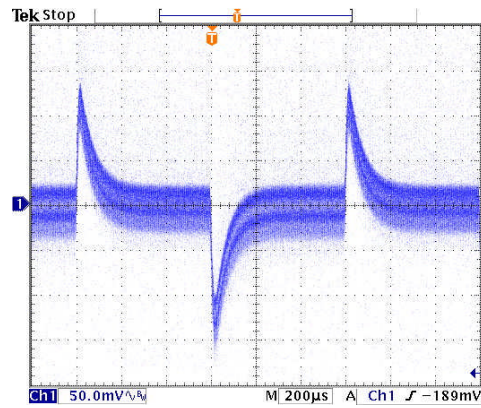

Transient Response to Dynamic Load Change from 100% to 75% to 100% of Full Load ; Vin = Vin(nom)

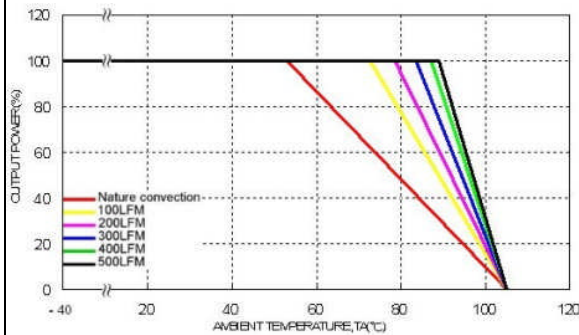

Derating Output Current versus Ambient Temperature and Airflow  
Vin = Vin(nom)

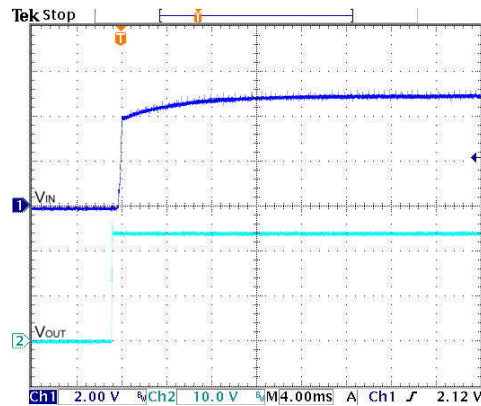


Typical Input Start-Up and Output Rise Characteristic  
Vin = Vin(nom) ; Full Load




Characteristic Curves (Continued)


All test conditions are at 25 °C. PXB15-24WS05

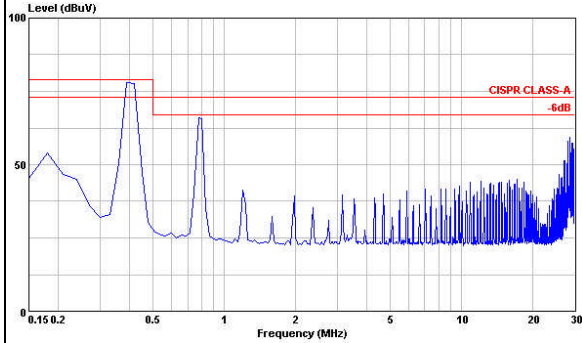


Conduction Emission of EN55022 Class A  
 $V_{in} = V_{in(nom)}$  ; Full Load

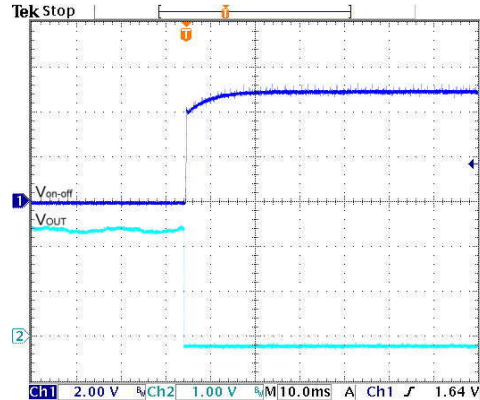


Using ON/OFF Voltage Start-Up and Vo Rise Characteristic  
 $V_{in} = V_{in(nom)}$  ; Full Load

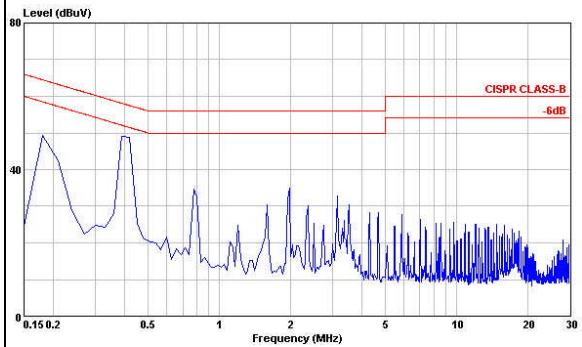

Conduction Emission of EN55022 Class B  
 $V_{in} = V_{in(nom)}$  ; Full Load

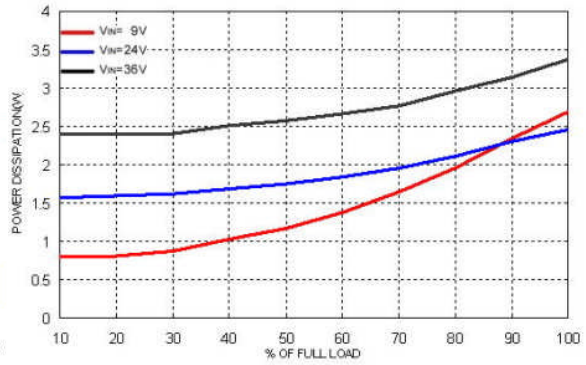


Power Dissipation versus Output Current

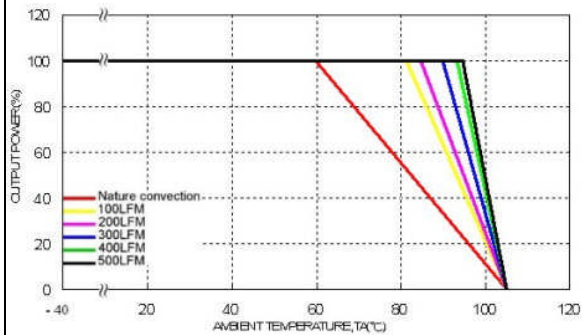


Derating Output Current Versus Ambient Temperature with Heat-Sink and Airflow,  $V_{in} = V_{in(nom)}$

Characteristic Curves (Continued)

All test conditions are at 25 °C. PXB15-24WS12

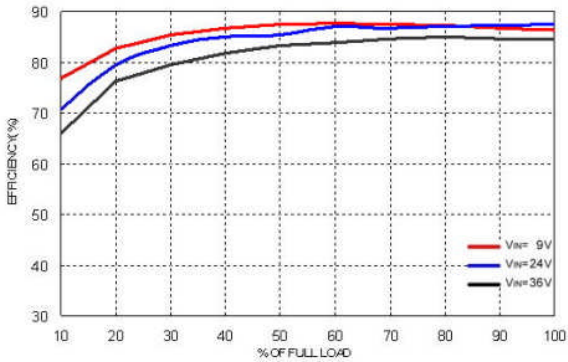


Efficiency versus Output Current

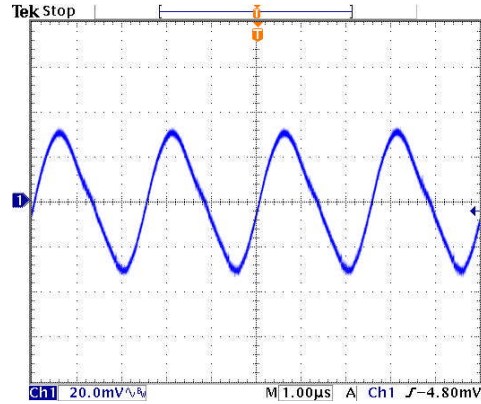


Typical Output Ripple and Noise.


$V_{in} = V_{in(nom)}$  ; Full Load

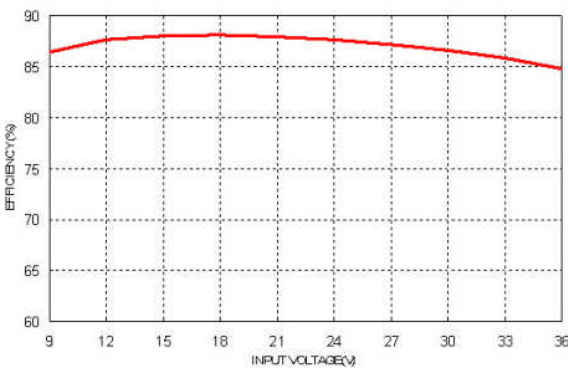


Efficiency versus Input Voltage. Full Load

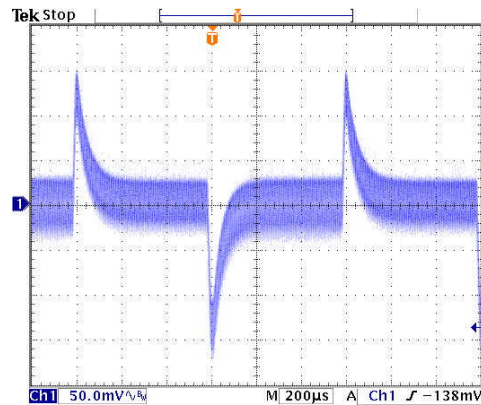

Transient Response to Dynamic Load Change from 100% to 75% to 100% of Full Load ;  $V_{in} = V_{in(nom)}$

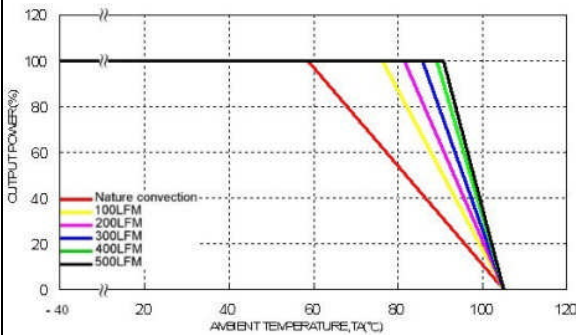


Derating Output Current versus Ambient Temperature and Airflow  
 $V_{in} = V_{in(nom)}$

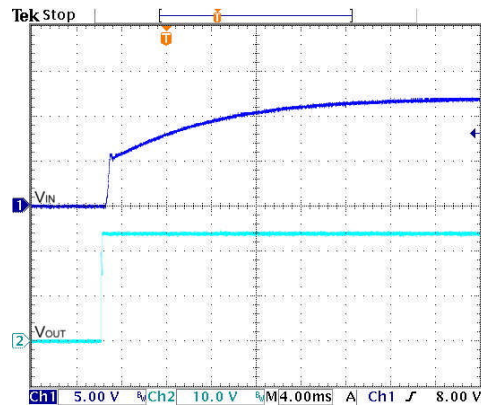


Typical Input Start-Up and Output Rise Characteristic  
 $V_{in} = V_{in(nom)}$  ; Full Load

Characteristic Curves (Continued)


All test conditions are at 25 °C. PXB15-24WS12

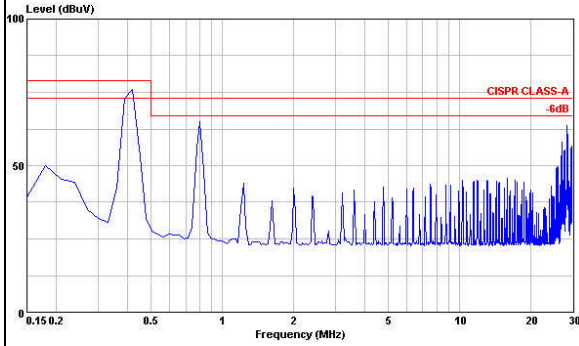


Conduction Emission of EN55022 Class A  
 $V_{in} = V_{in(nom)}$  ; Full Load

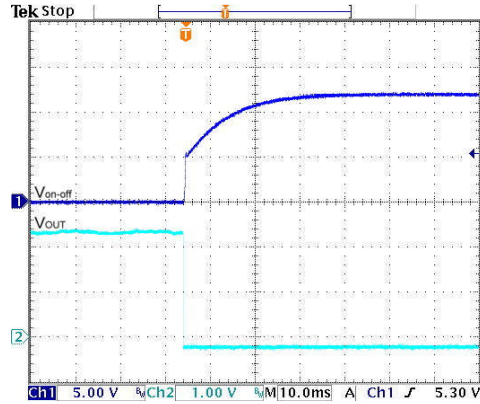


Using ON/OFF Voltage Start-Up and  $V_o$  Rise Characteristic  
 $V_{in} = V_{in(nom)}$  ; Full Load

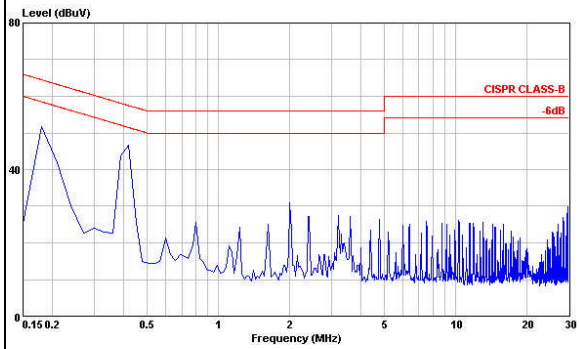

Conduction Emission of EN55022 Class B  
 $V_{in} = V_{in(nom)}$  ; Full Load

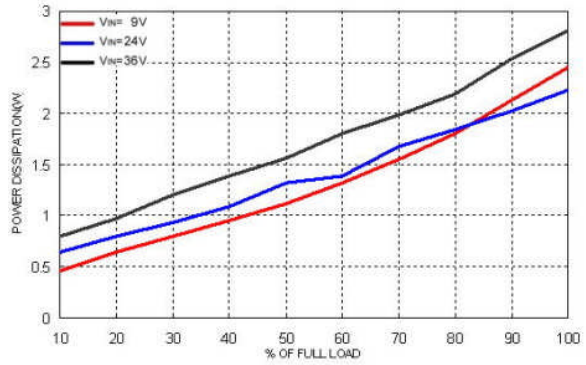


Power Dissipation versus Output Current

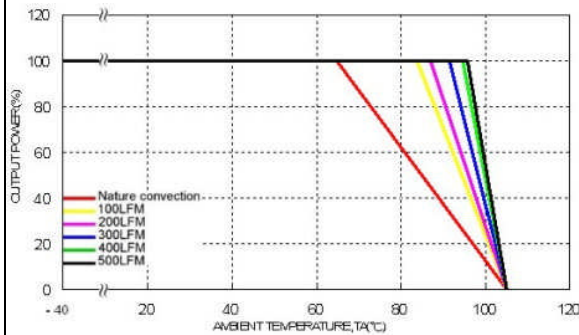


Derating Output Current Versus Ambient Temperature with Heat-Sink and Airflow,  $V_{in} = V_{in(nom)}$

Characteristic Curves (Continued)

All test conditions are at 25 °C. PXB15-24WS15

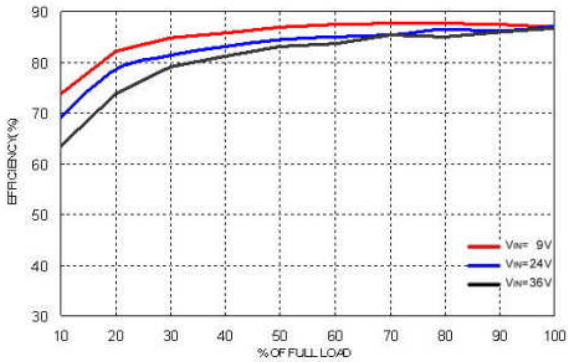


Efficiency versus Output Current

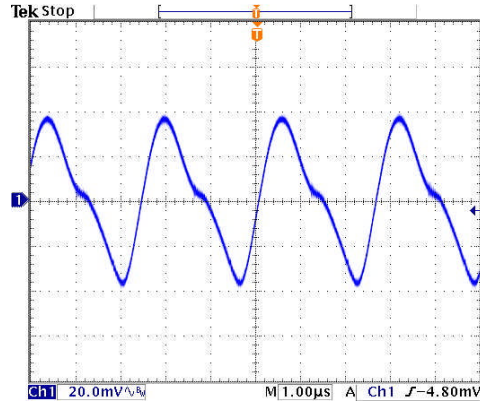


Typical Output Ripple and Noise.


Vin = Vin(nom) ; Full Load

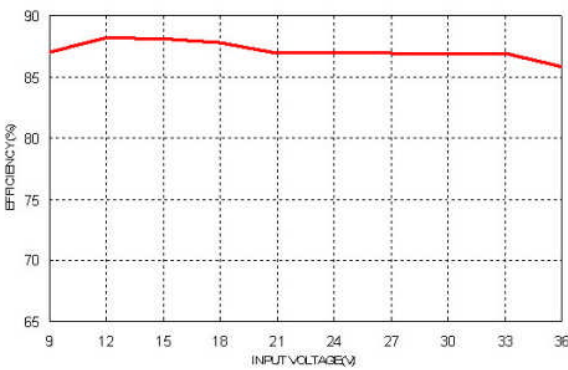


Efficiency versus Input Voltage, Full Load

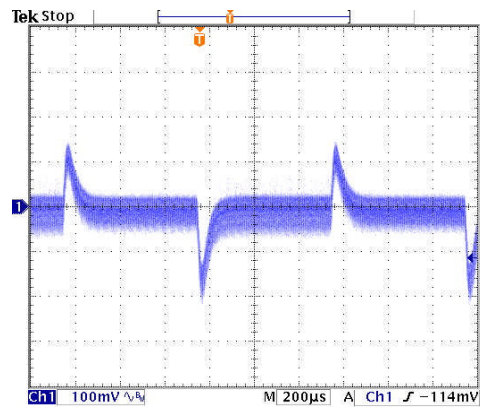

Transient Response to Dynamic Load Change from 100% to 75% to 100% of Full Load ; Vin = Vin(nom)

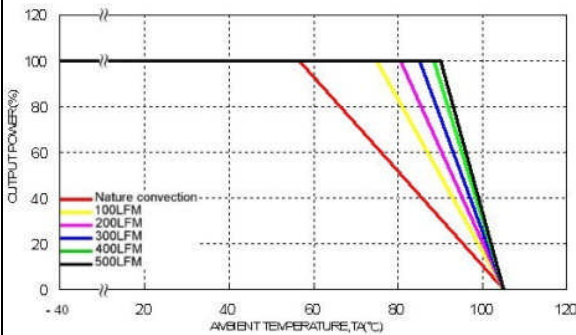

Derating Output Current versus Ambient Temperature and Airflow  
Vin = Vin(nom)

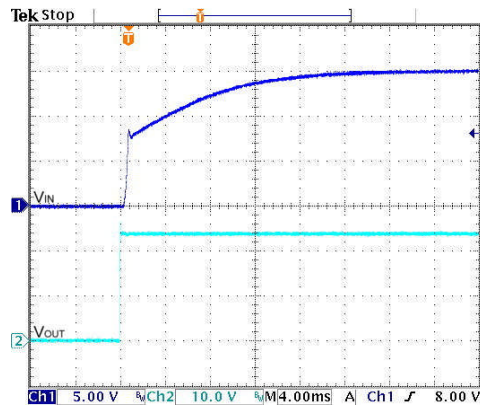


Typical Input Start-Up and Output Rise Characteristic  
Vin = Vin(nom) ; Full Load




Characteristic Curves (Continued)


All test conditions are at 25 °C. PXB15-24WS15

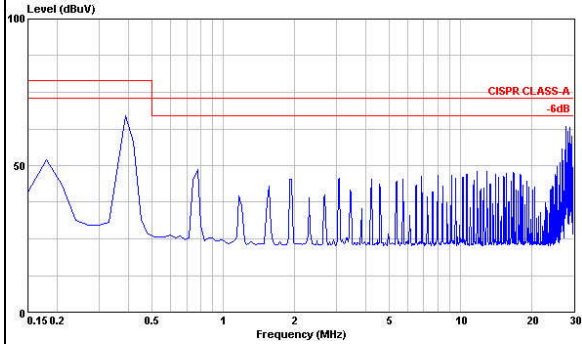


Conduction Emission of EN55022 Class A  
 $V_{in} = V_{in(nom)}$  ; Full Load

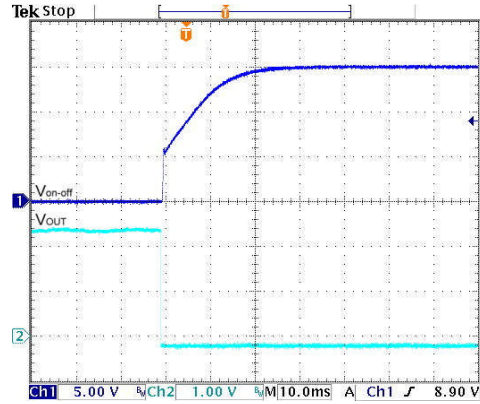


Using ON/OFF Voltage Start-Up and Vo Rise Characteristic  
 $V_{in} = V_{in(nom)}$  ; Full Load

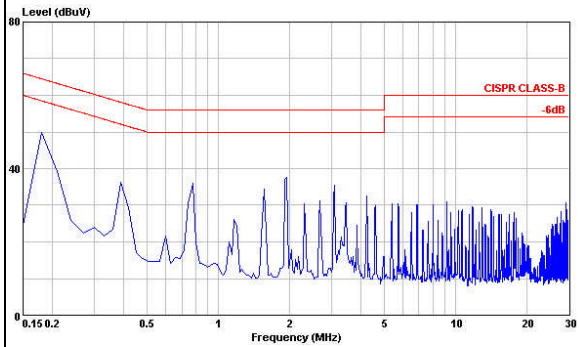

Conduction Emission of EN55022 Class B  
 $V_{in} = V_{in(nom)}$  ; Full Load

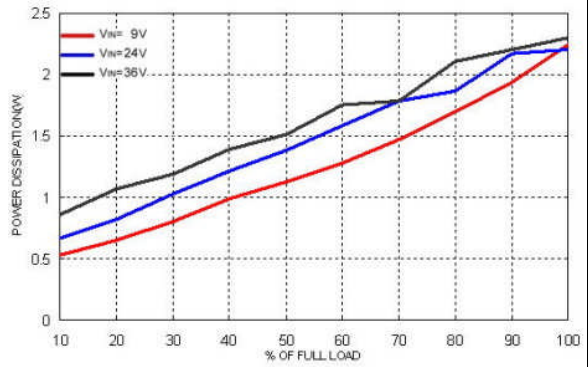


Power Dissipation versus Output Current

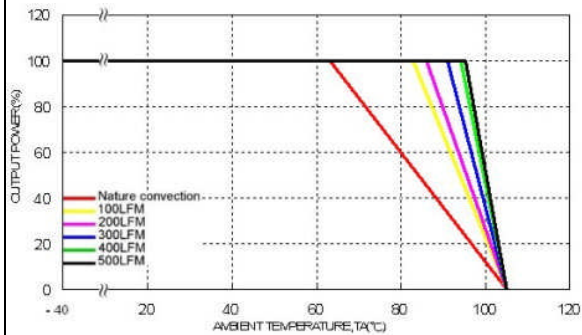


Derating Output Current Versus Ambient Temperature with Heat-Sink  
and Airflow,  $V_{in} = V_{in(nom)}$

Characteristic Curves (Continued)

All test conditions are at 25 °C. PXB15-48WS3P3

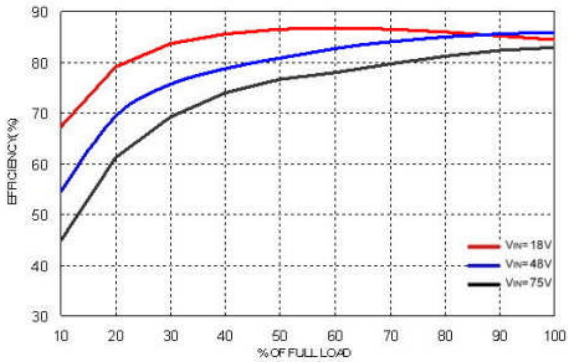


Efficiency versus Output Current

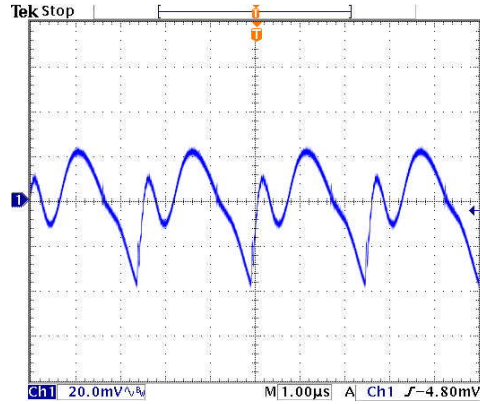


Typical Output Ripple and Noise.


$V_{in} = V_{in(nom)}$  ; Full Load

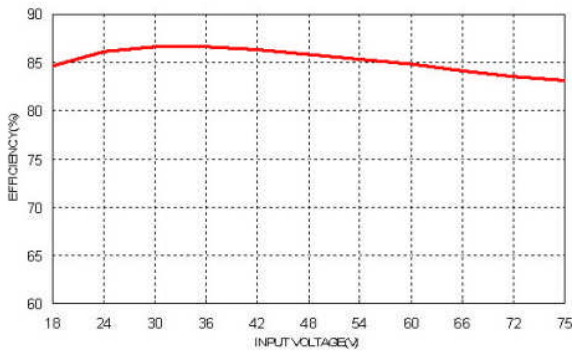


Efficiency versus Input Voltage. Full Load

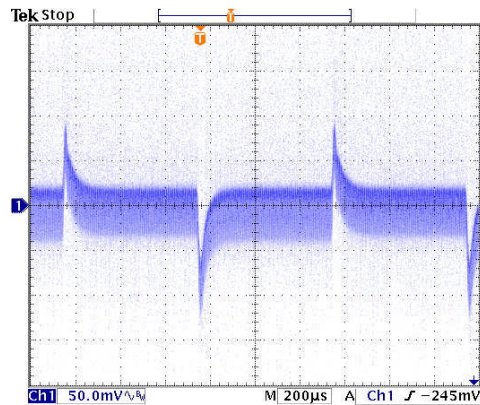

Transient Response to Dynamic Load Change from 100% to 75% to 100% of Full Load ;  $V_{in} = V_{in(nom)}$

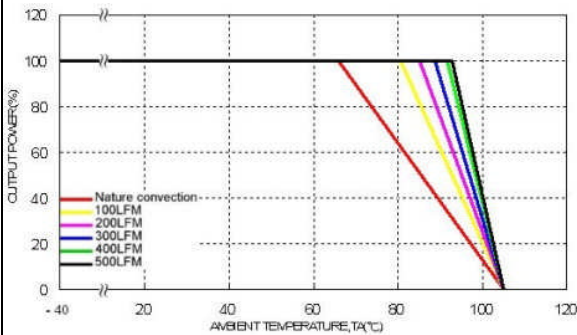


Derating Output Current versus Ambient Temperature and Airflow  
 $V_{in} = V_{in(nom)}$

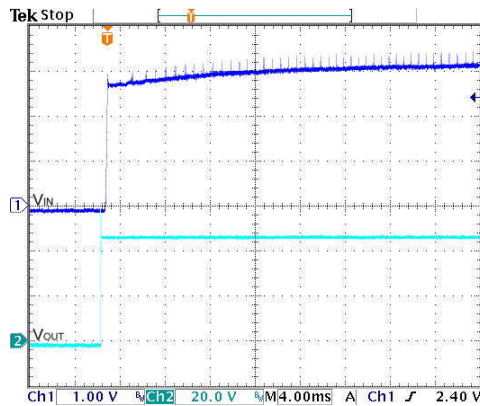


Typical Input Start-Up and Output Rise Characteristic  
 $V_{in} = V_{in(nom)}$  ; Full Load

Characteristic Curves (Continued)


All test conditions are at 25 °C. PXB15-48WS3P3

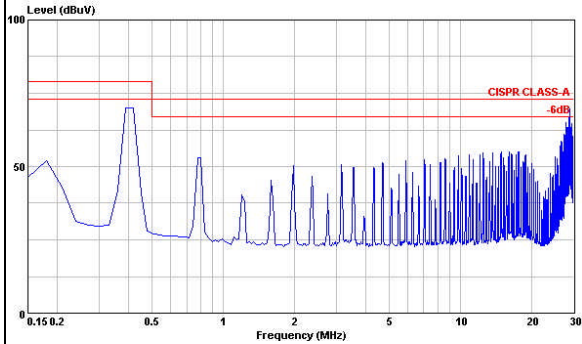


Conduction Emission of EN55022 Class A  
 $V_{in} = V_{in(nom)}$  ; Full Load

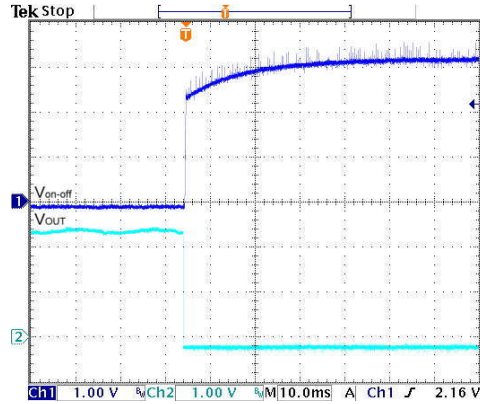


Using ON/OFF Voltage Start-Up and Vo Rise Characteristic  
 $V_{in} = V_{in(nom)}$  ; Full Load

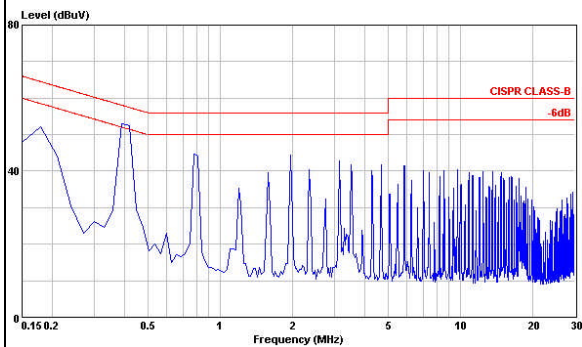

Conduction Emission of EN55022 Class B  
 $V_{in} = V_{in(nom)}$  ; Full Load

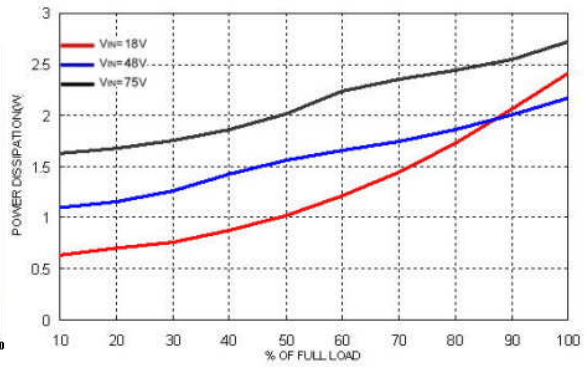


Power Dissipation versus Output Current

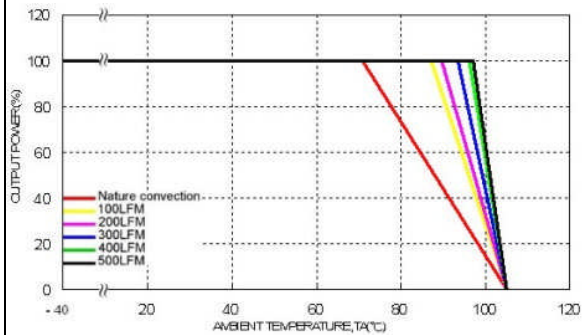


Derating Output Current Versus Ambient Temperature with Heat-Sink  
and Airflow,  $V_{in} = V_{in(nom)}$

Characteristic Curves (Continued)

All test conditions are at 25 °C. PXB15-48WS05

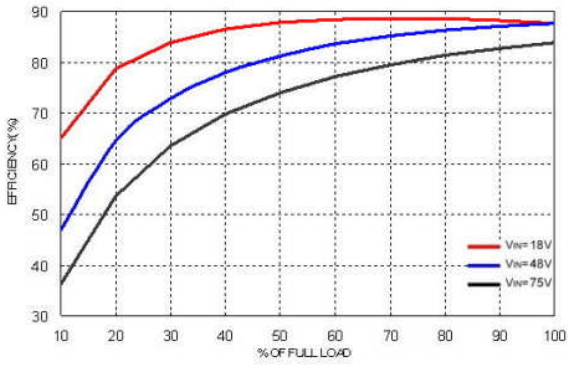


Efficiency versus Output Current

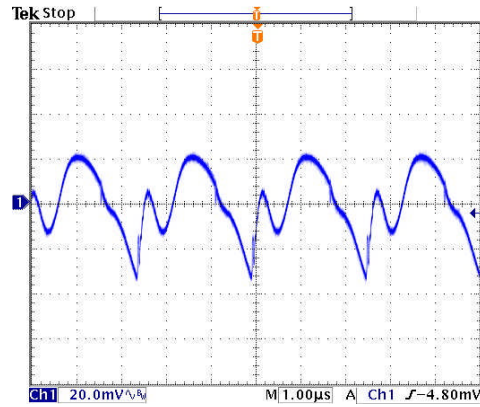


Typical Output Ripple and Noise.


Vin = Vin(nom); Full Load

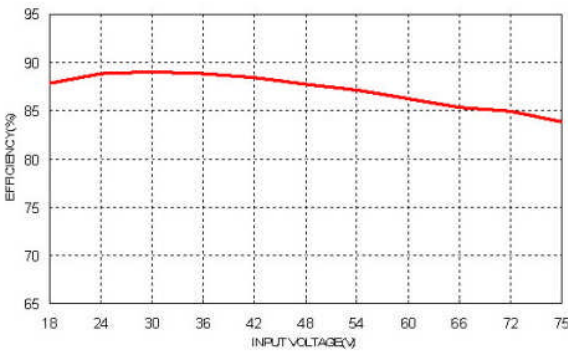

Efficiency versus Input Voltage. Full Load

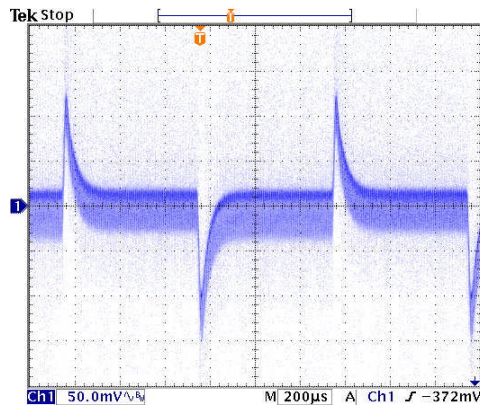


Transient Response to Dynamic Load Change from 100% to 75% to 100% of Full Load ; Vin = Vin(nom)

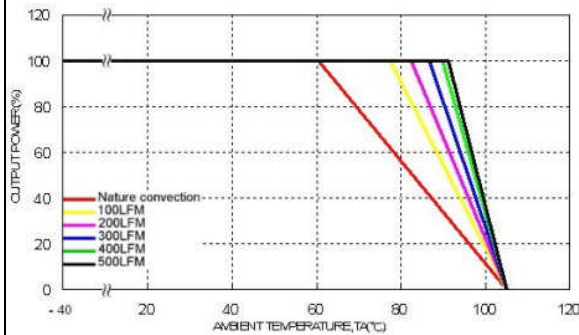

Derating Output Current versus Ambient Temperature and Airflow

Vin = Vin(nom)

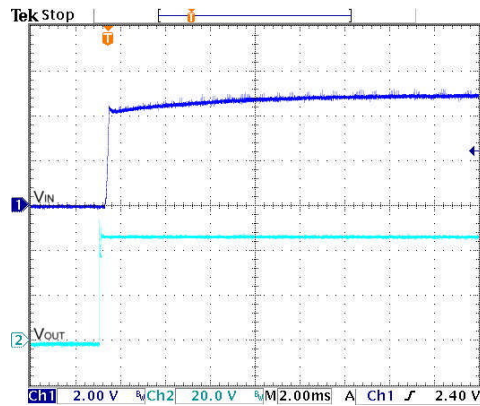


Typical Input Start-Up and Output Rise Characteristic

Vin = Vin(nom) ; Full Load




Characteristic Curves (Continued)


All test conditions are at 25 °C. PXB15-48WS05

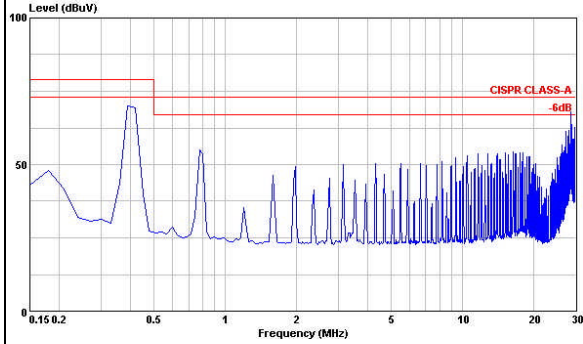


Conduction Emission of EN55022 Class A  
 $V_{in} = V_{in(nom)}$  ; Full Load

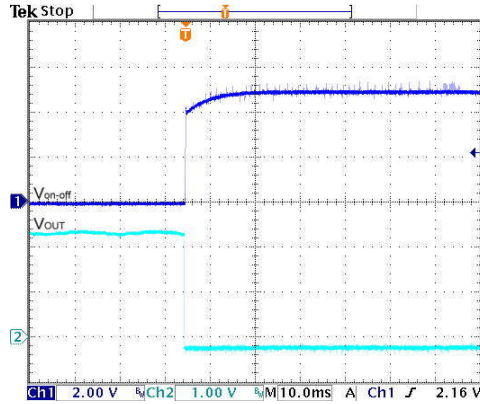


Using ON/OFF Voltage Start-Up and Vo Rise Characteristic  
 $V_{in} = V_{in(nom)}$  ; Full Load

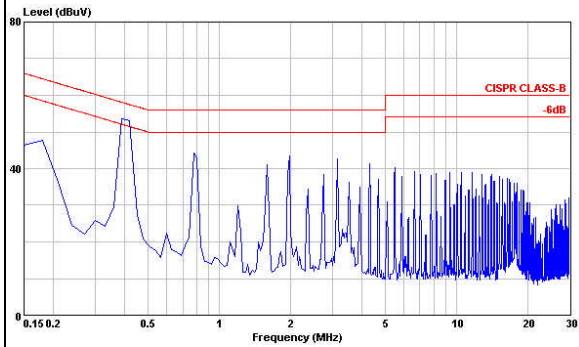

Conduction Emission of EN55022 Class B  
 $V_{in} = V_{in(nom)}$  ; Full Load

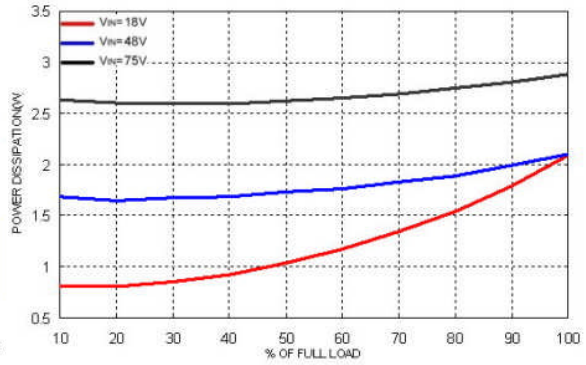


Power Dissipation versus Output Current

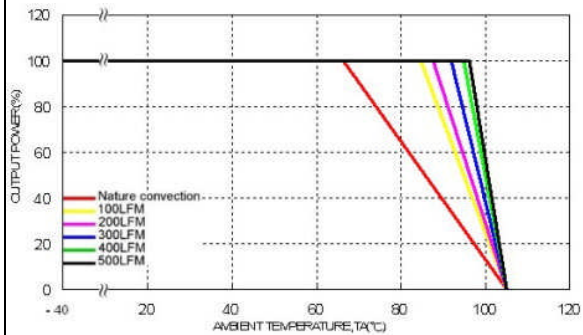


Derating Output Current Versus Ambient Temperature with Heat-Sink  
and Airflow,  $V_{in} = V_{in(nom)}$

Characteristic Curves (Continued)

All test conditions are at 25 °C. PXB15-48WS12

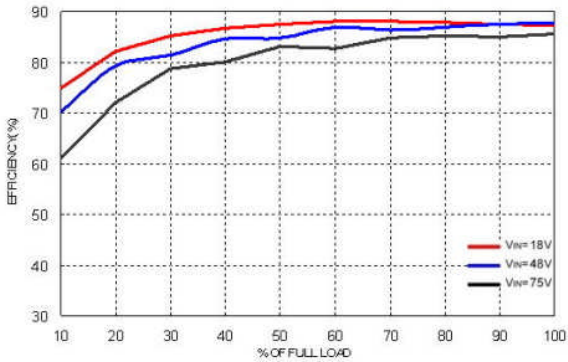


Efficiency versus Output Current

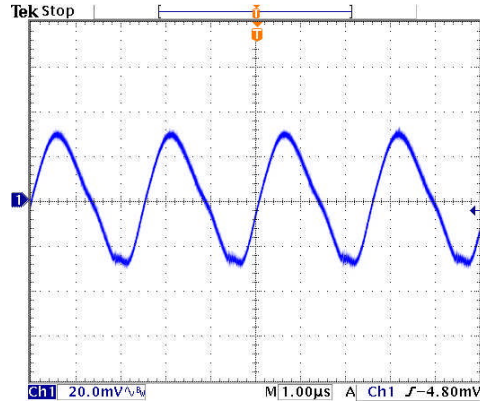


Typical Output Ripple and Noise.


$V_{in} = V_{in(nom)}$  ; Full Load

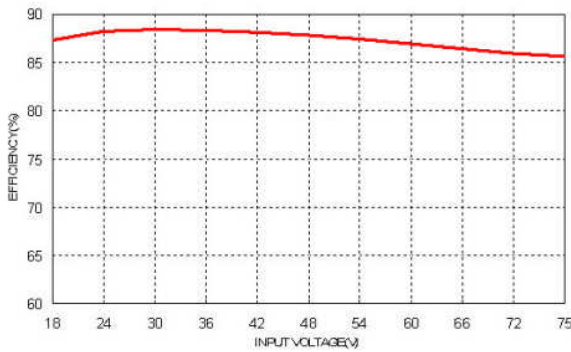


Efficiency versus Input Voltage. Full Load

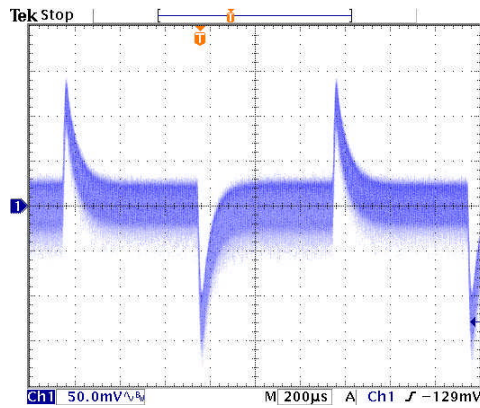

Transient Response to Dynamic Load Change from 100% to 75% to 100% of Full Load ;  $V_{in} = V_{in(nom)}$

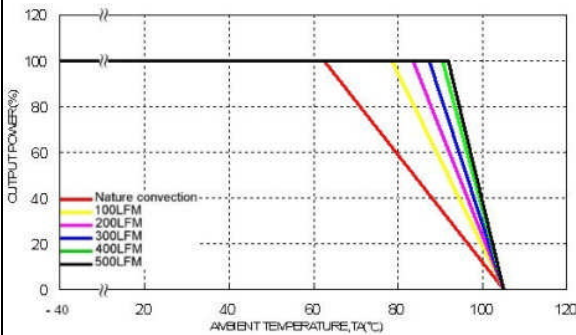


Derating Output Current versus Ambient Temperature and Airflow  
 $V_{in} = V_{in(nom)}$

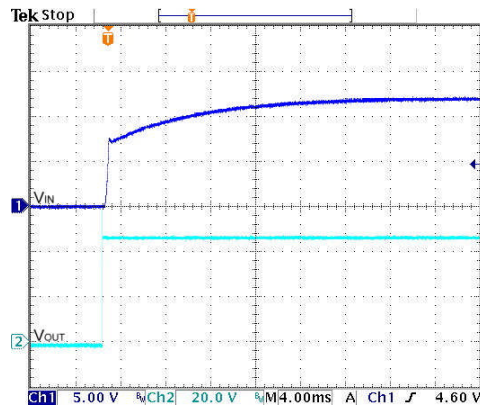


Typical Input Start-Up and Output Rise Characteristic  
 $V_{in} = V_{in(nom)}$  ; Full Load

Characteristic Curves (Continued)


All test conditions are at 25 °C. PXB15-48WS12

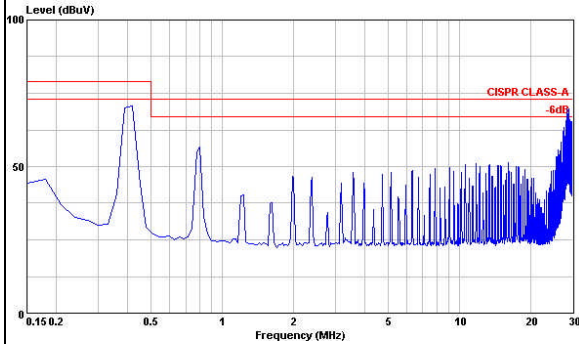


Conduction Emission of EN55022 Class A  
 $V_{in} = V_{in(nom)}$  ; Full Load

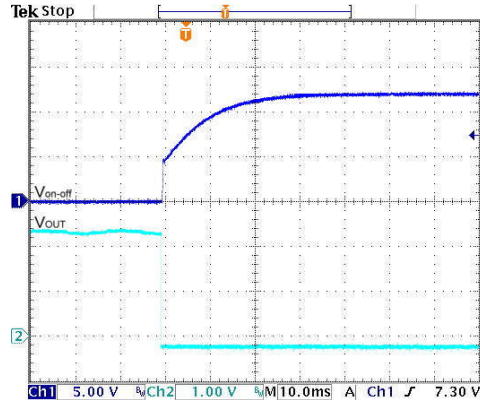


Using ON/OFF Voltage Start-Up and Vo Rise Characteristic  
 $V_{in} = V_{in(nom)}$  ; Full Load

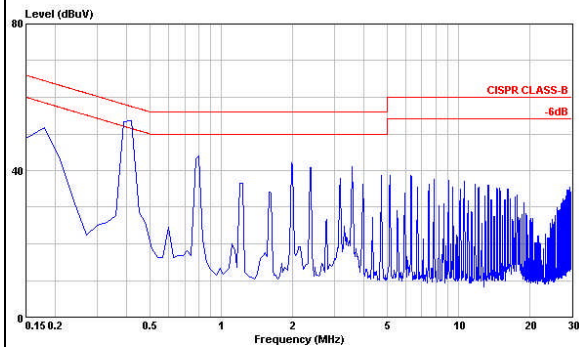

Conduction Emission of EN55022 Class B  
 $V_{in} = V_{in(nom)}$  ; Full Load

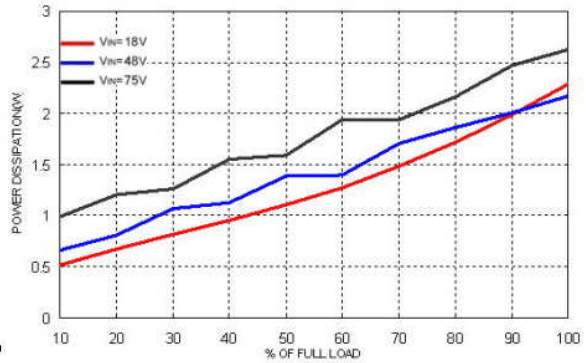


Power Dissipation versus Output Current

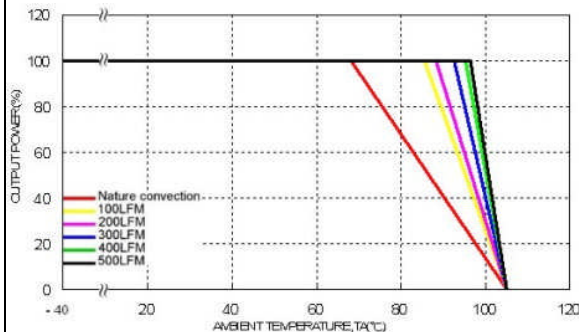


Derating Output Current Versus Ambient Temperature with Heat-Sink  
and Airflow,  $V_{in} = V_{in(nom)}$

Characteristic Curves (Continued)

All test conditions are at 25 °C. PXB15-48WS15

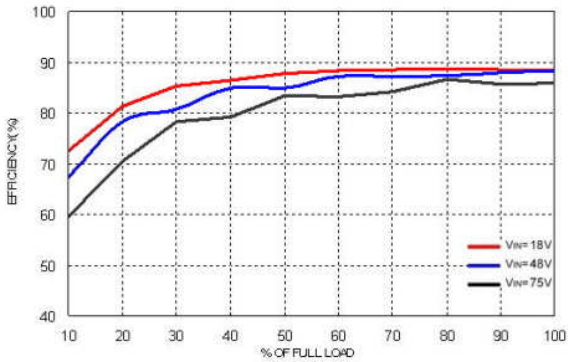


Efficiency versus Output Current

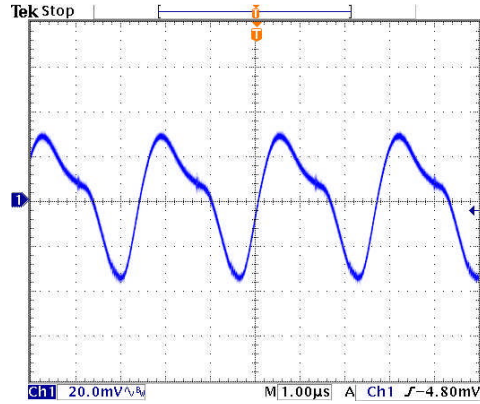


Typical Output Ripple and Noise.


$V_{in} = V_{in(nom)}$  ; Full Load

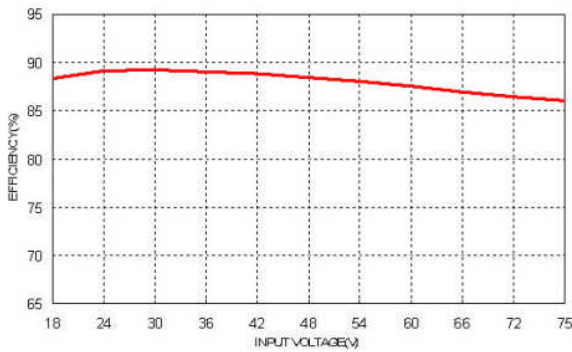

Efficiency versus Input Voltage. Full Load

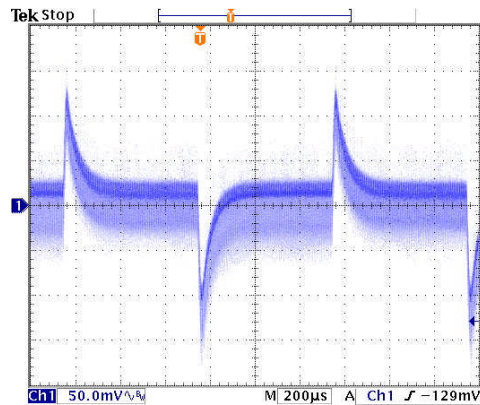


Transient Response to Dynamic Load Change from 100% to 75% to 100% of Full Load ;  $V_{in} = V_{in(nom)}$

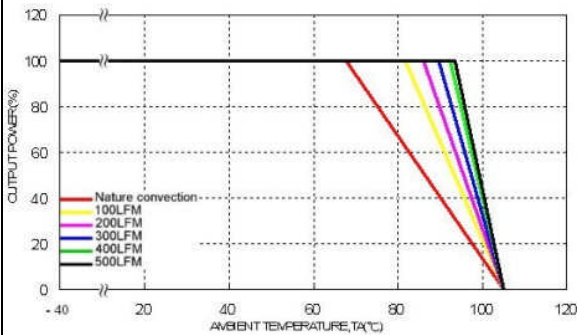

Derating Output Current versus Ambient Temperature and Airflow

$V_{in} = V_{in(nom)}$

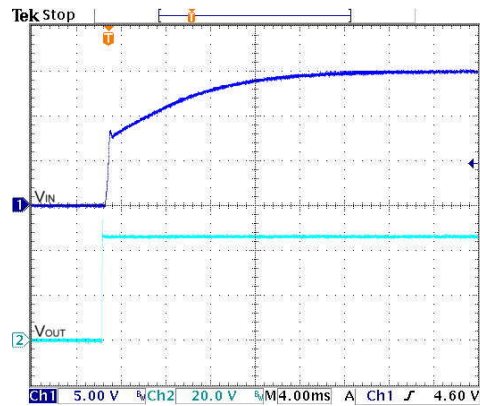


Typical Input Start-Up and Output Rise Characteristic

$V_{in} = V_{in(nom)}$  ; Full Load




Characteristic Curves (Continued)


All test conditions are at 25 °C. PXB15-48WS15

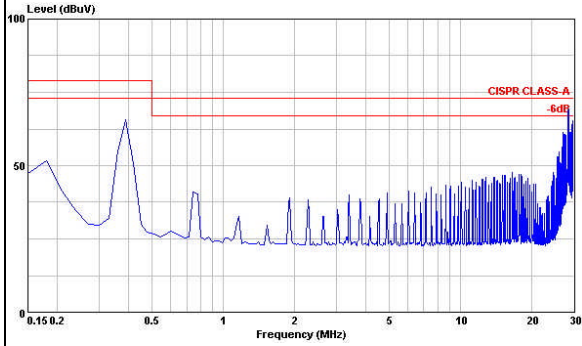


Conduction Emission of EN55022 Class A  
 $V_{in} = V_{in(nom)}$  ; Full Load

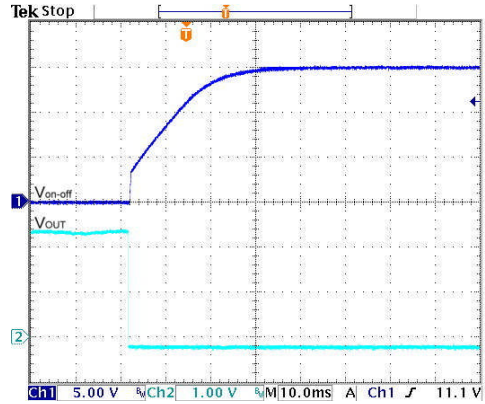


Using ON/OFF Voltage Start-Up and Vo Rise Characteristic  
 $V_{in} = V_{in(nom)}$  ; Full Load

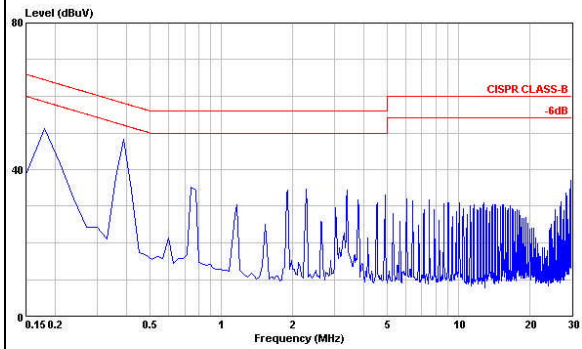

Conduction Emission of EN55022 Class B  
 $V_{in} = V_{in(nom)}$  ; Full Load

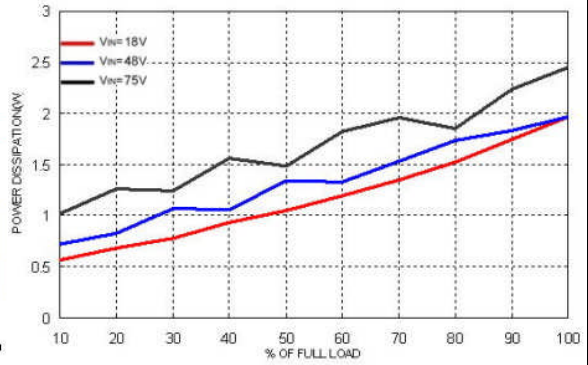


Power Dissipation versus Output Current

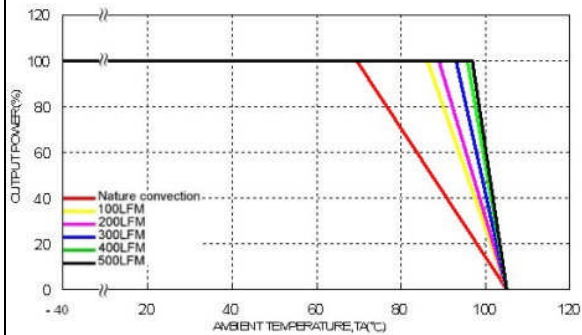

Derating Output Current Versus Ambient Temperature with Heat-Sink and Airflow,  $V_{in} = V_{in(nom)}$


### Testing Configurations

#### Input reflected-ripple current measurement

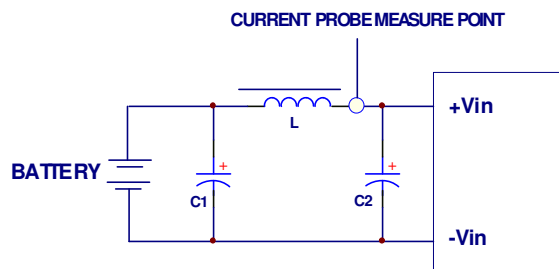


Component	Value	Voltage	Reference
L	12μH	---	---
C1	10μF	100V	Aluminum Electrolytic Capacitor
C2	10μF	100V	Aluminum Electrolytic Capacitor

#### Peak-to-peak output ripple & noise measurement

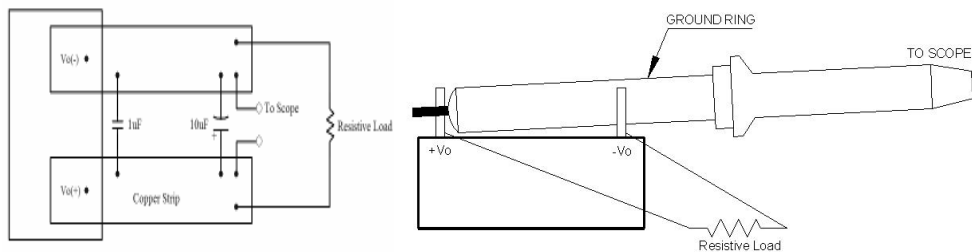


#### Output voltage and efficiency measurement

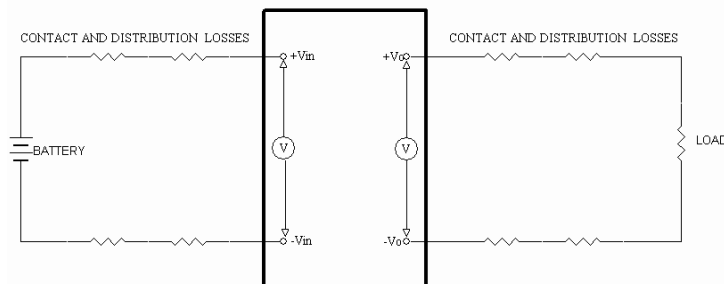


Note: All measurements are taken at the module terminals.

$$\text{Efficiency} = \left( \frac{V_o \times I_o}{V_{in} \times I_{in}} \right) \times 100\%$$

EMC considerations

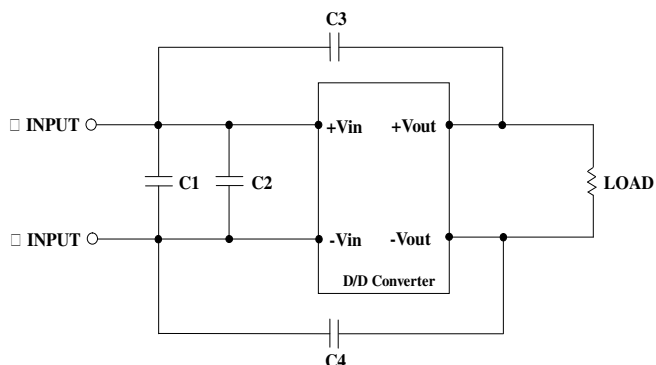

Suggested schematic for EN55022 conducted emission Class A limits

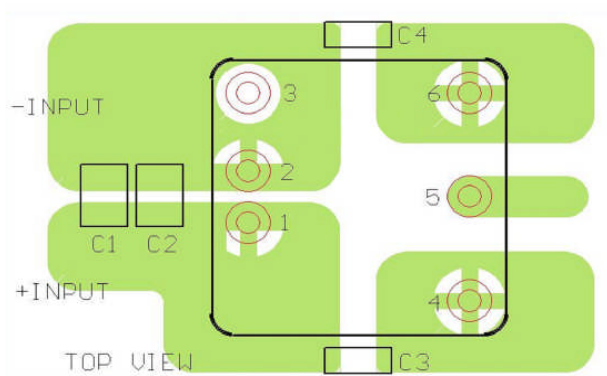

Recommended layout with input filter

To meet conducted emissions EN55022 CLASS A, the following components are needed:


PXB15-24WSXX

Component	Value	Voltage	Reference
C1	6.8uF	50V	1812 MLCC
C2	6.8uF	50V	1812 MLCC
C3,C4	470pF	2KV	1808 MLCC


PXB15-48WSXX

Component	Value	Voltage	Reference
C1	2.2uF	100V	1812 MLCC
C2	2.2uF	100V	1812 MLCC
C3,C4	470pF	2KV	1808 MLCC

EMC considerations (Continued)

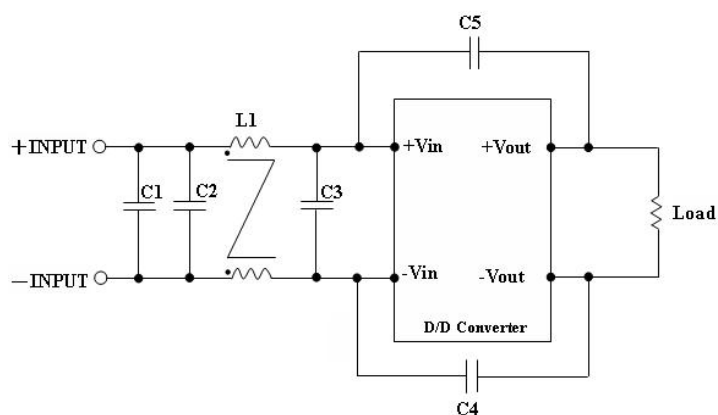

Suggested schematic for EN55022 conducted emission Class B limits

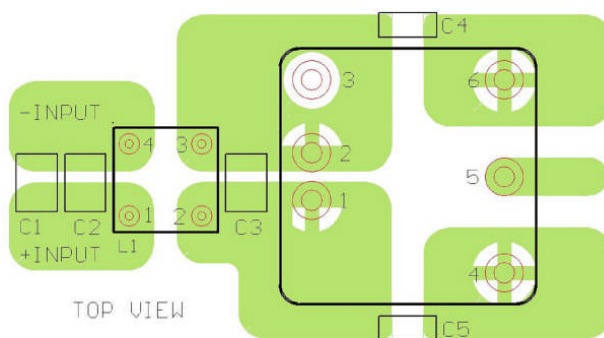

Recommended layout with input filter

To meet conducted emissions EN55022 CLASS B, the following components are needed:

PXB15-24WSXX

Component	Value	Voltage	Reference
C1,C3	6.8 $\mu$ F	50V	1812 MLCC
C2	----	----	----
C4,C5	470pF	2KV	1808 MLCC
L1	325 $\mu$ H	----	Common Choke

PXB15-48WSXX


Component	Value	Voltage	Reference
C1,C3	2.2 $\mu$ F	100V	1812 MLCC
C2	2.2 $\mu$ F	100V	1812 MLCC
C4,C5	1000pF	2KV	1808 MLCC
L1	325 $\mu$ H	----	Common Choke



**EMC considerations (Continued)**

This Common Choke L1 is defined as follow:

- L:  $325\mu\text{H}\pm 35\%$  / DCR:  $35\Omega$ , max  
**A** height: 8.8 mm, Max
- Test condition: 100KHz / 100mV
- Recommended through hole:  $\Phi 0.8\text{mm}$
- All dimensions in millimeters

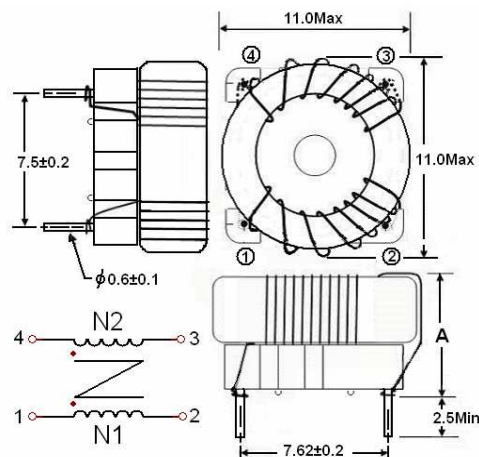

**Input Source Impedance**

The power module should be connected to a low impedance input source. Highly inductive source impedance can affect the stability of the power module. The addition of an external C-L-C filter is recommended to minimize input reflected ripple current. The inductor is simulated source impedance of  $12\mu\text{H}$  and capacitor is Nippon chemi-con KZE series  $10\mu\text{F}/100\text{V}$  &  $10\mu\text{F}/100\text{V}$ . The capacitor must be located as close as possible to the input terminals of the power module for lower impedance.

**Output Over Current Protection**

When excessive output currents occur in the system, circuit protection is required on all power supplies. Normally, overload current is maintained at approximately 150 percent of rated current for PXB15W single output series.

Hiccup-mode is a method of operation in a power supply whose purpose is to protect the power supply from being damaged during an over-current fault condition. It also allows the power supply to restart when the fault is removed.

One of the problems resulting from over current is that excessive heat may be generated in power devices; especially MOSFET and Schottky diodes and the temperature of those devices may exceed their specified limits. A protection mechanism has to be used to prevent those power devices from being damaged.

**Output Over Voltage Protection**

The output over-voltage protection consists of a Zener diode that monitors the output voltage on the feedback loop. If the voltage on the output terminals exceeds the over-voltage protection threshold, then the Zener diode will send a signal to the control IC to limit the output voltage.

### Output Voltage Adjustment

Output voltage set point adjustment allows the user to increase or decrease the output voltage set point of a module. This is accomplished by connecting an external resistor between the TRIM pin and either the Vo (+) or Vo (-) pins. With an external resistor between the TRIM and Vo (-) pin, the output voltage set point increases. With an external resistor between the TRIM and Vo (+) pin, the output voltage set point decreases.

- **Trim up equation**


$$R_U = \left[ \frac{G \times L}{(V_{O,up} - L - K)} - H \right] \Omega$$

- **Trim down equation**

$$R_D = \left[ \frac{(V_{O,down} - L) \times G}{(V_O - V_{O,down})} - H \right] \Omega$$

- **Trim constants**

Module	G	H	K	L
PXB15-XXWS3P3	5110	2050	0.8	2.5
PXB15-XXWS05	5110	2050	2.5	2.5
PXB15-XXWS12	10000	5110	9.5	2.5
PXB15-XXWS15	10000	5110	12.5	2.5

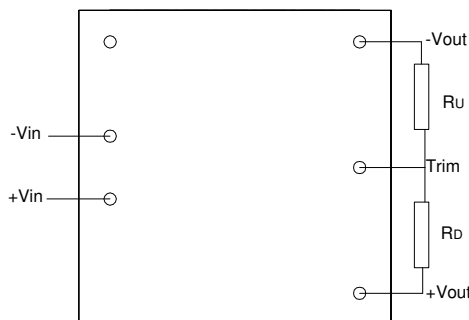

TRIM TABLE

PXB15-XXWS3P3

Trim up (%)	1	2	3	4	5	6	7	8	9	10
V <sub>OUT</sub> (Volts)=	3.333	3.366	3.399	3.432	3.465	3.498	3.531	3.564	3.597	3.630
R <sub>U</sub> (K Ohms)=	385.071	191.511	126.990	94.730	75.374	62.470	53.253	46.340	40.963	36.662
Trim down (%)	1	2	3	4	5	6	7	8	9	10
V <sub>OUT</sub> (Volts)=	3.267	3.234	3.201	3.168	3.135	3.102	3.069	3.036	3.003	2.970
R <sub>D</sub> (K Ohms)=	116.719	54.779	34.133	23.810	17.616	13.486	10.537	8.325	6.604	5.228

PXB15-XXWS05

Trim up (%)	1	2	3	4	5	6	7	8	9	10
V <sub>OUT</sub> (Volts)=	5.050	5.100	5.150	5.200	5.250	5.300	5.350	5.400	5.450	5.500
R <sub>U</sub> (K Ohms)=	253.450	125.700	83.117	61.825	49.050	40.533	34.450	29.888	26.339	23.500
Trim down (%)	1	2	3	4	5	6	7	8	9	10
V <sub>OUT</sub> (Volts)=	4.950	4.900	4.850	4.800	4.750	4.700	4.650	4.600	4.550	4.500
R <sub>D</sub> (K Ohms)=	248.340	120.590	78.007	56.715	43.940	35.423	29.340	24.778	21.229	18.390

PXB15-XXWS12

Trim up (%)	1	2	3	4	5	6	7	8	9	10
V <sub>OUT</sub> (Volts)=	12.120	12.240	12.360	12.480	12.600	12.720	12.840	12.960	13.080	13.200
R <sub>U</sub> (K Ohms)=	203.223	99.057	64.334	46.973	36.557	29.612	24.652	20.932	18.038	15.723
Trim down (%)	1	2	3	4	5	6	7	8	9	10
V <sub>OUT</sub> (Volts)=	11.880	11.760	11.640	11.520	11.400	11.280	11.160	11.040	10.920	10.800
R <sub>D</sub> (K Ohms)=	776.557	380.723	248.779	182.807	143.223	116.834	97.985	83.848	72.853	64.057

PXB15-XXWS15

Trim up (%)	1	2	3	4	5	6	7	8	9	10
V <sub>OUT</sub> (Volts)=	15.150	15.300	15.450	15.600	15.750	15.900	16.050	16.200	16.350	16.500
R <sub>U</sub> (K Ohms)=	161.557	78.223	50.446	36.557	28.223	22.668	18.700	15.723	13.409	11.557
Trim down (%)	1	2	3	4	5	6	7	8	9	10
V <sub>OUT</sub> (Volts)=	14.850	14.700	14.550	14.400	14.250	14.100	13.950	13.800	13.650	13.500
R <sub>D</sub> (K Ohms)=	818.223	401.557	262.668	193.223	151.557	123.779	103.938	89.057	77.483	68.223