



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




1. MATERIALS AND FINISHES:
BODY, BUSHING - BRASS, NICKEL PLATING
CONTACT - PHOSPHOR BRONZE, GOLD PLATING
INSULATOR - PTFE, NATURAL
2. ELECTRICAL:
A. DIELECTRIC WITHSTANDING VOLTAGE: 1500 VRMS, MIN.
3. MECHANICAL:
A. DURABILITY: 500 CYCLES MIN.
B. TEMPERATURE RANGE: -65° C TO +165° C
4. SOLDER CONTACT TO CABLE,
WHEN CRIMPING CONTACT TO CABLE, CRIMP WITH AMPHENOL TOOL
227-944(M22520/5-01) AND DIE SET 227-1221-57, CAVITY 'B'
(M22520/5-57, CLOSURE 'B')
5. CRIMP FERRULE OVER BRAID AND BODY WITH AMPHENOL TOOL
277-944(M22520/5-01) AND DIE SET 227-1221-57, CAVITY 'A'
(M22520/5-57, CLOSURE 'A')
6. THIS CONNECTOR CAN BE USED ON CABLE:
RG58/U, 58A/U, 58B/U, 58C/U, 141/U & 141A/U CABLES.
7. MAX. PANEL THICKNESS = 6.35 MM [.250 INCH]

REVISIONS


REV	DESCRIPTION	DATE	ECO	APPR
A	RELEASE TO MFG.	4/4/66	13253	
N	REDRAWN TO UPDATE FORMAT	16-Mar-10	47687	SH
P	SYNC THE DRAWING TO MATCH MRP SYSTEM AND ROUTING	29-Jul-11	48696	SH
R	SYNC THE DRAWING WITH DANBURY, PLATING FOR CONTACT PIN WAS CHANGED	09-May-12	49054	SH

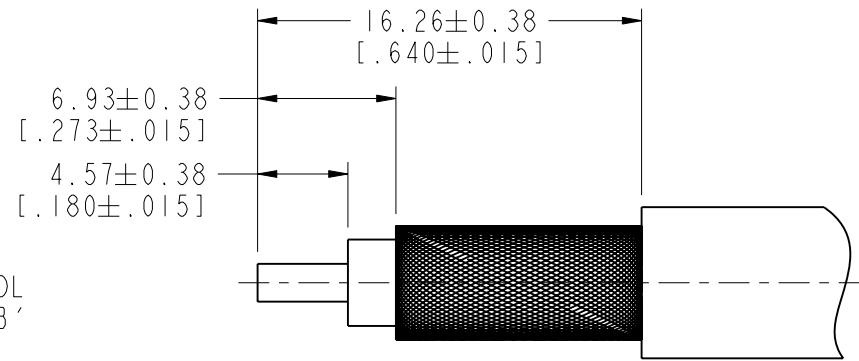



RECOMMENDED CABLE STRIPPING DIMENSIONS

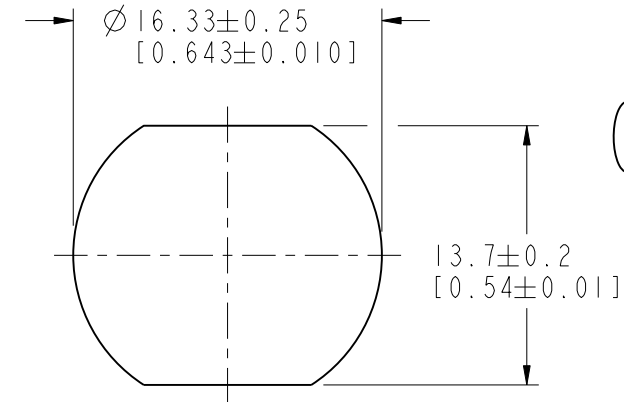

RECOMMENDED MOUNTING HOLE DIMENSIONS

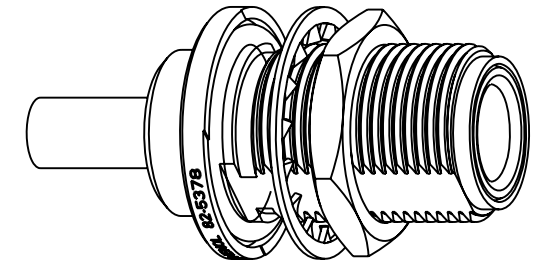

SCALE 1.500

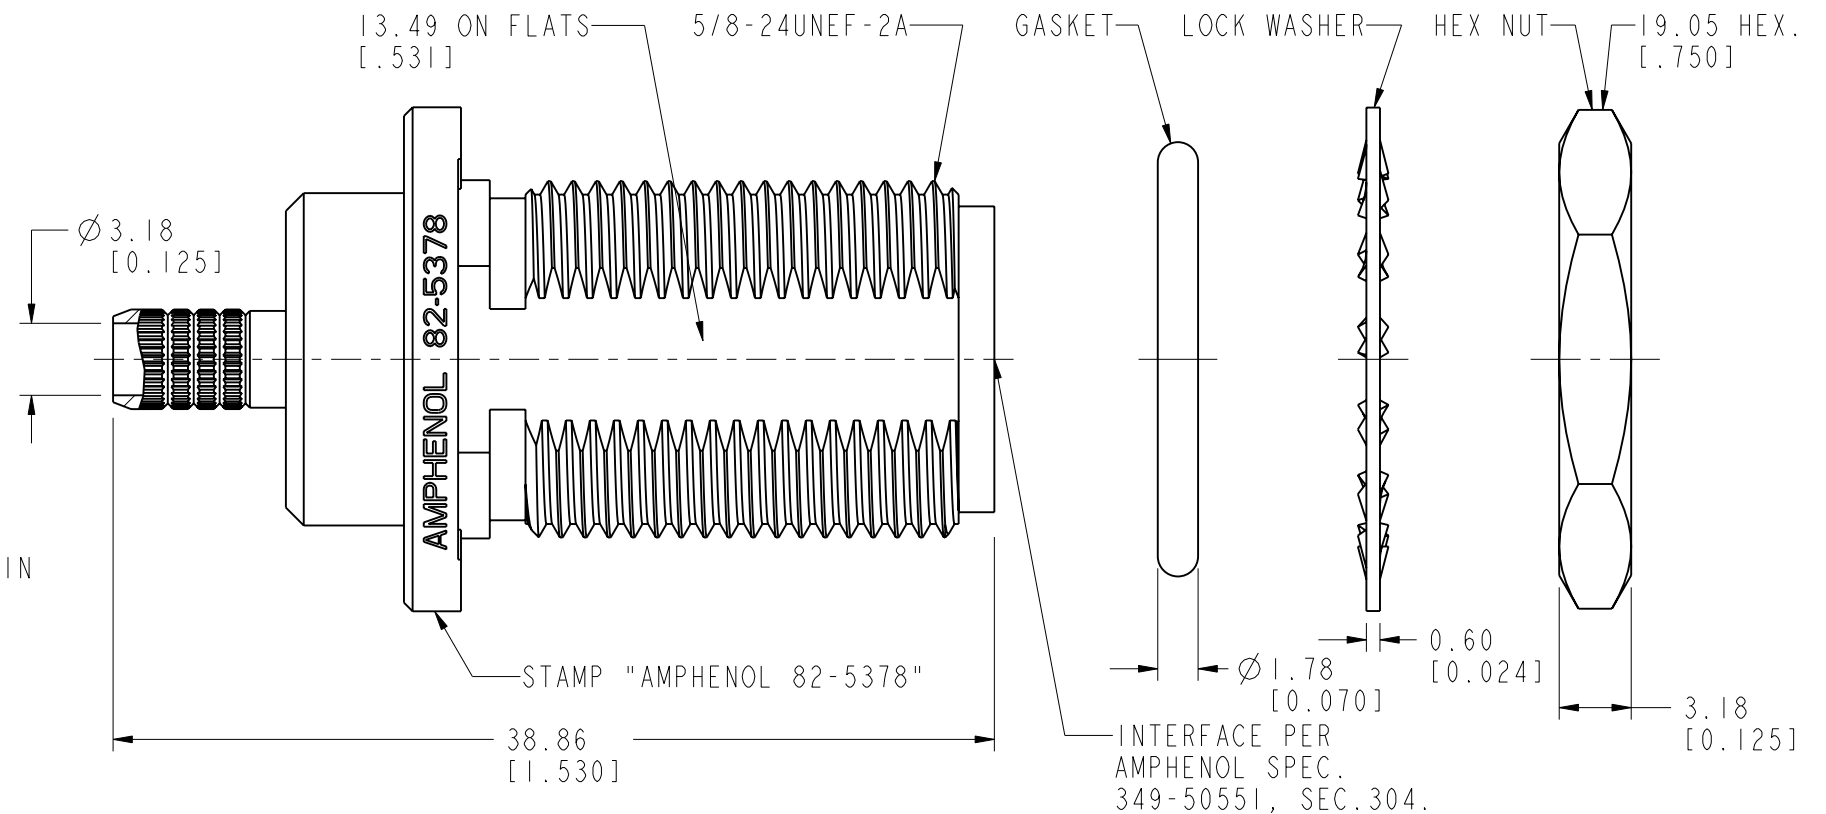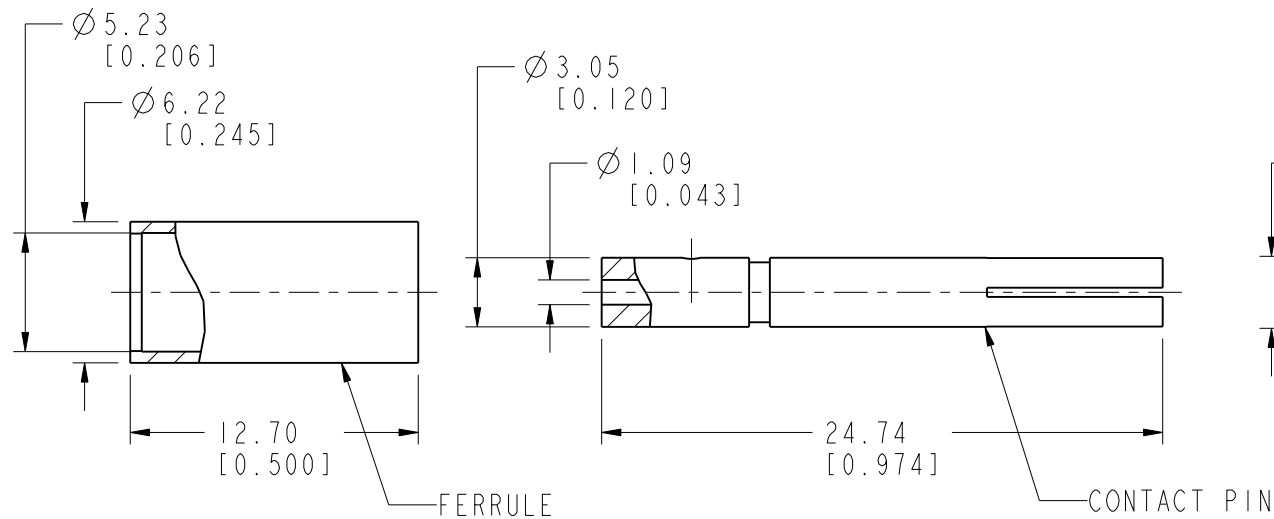

CUSTOMER OUTLINE DRAWING

THIS CONNECTOR IS COVERED BY U.S. PATENT 3,439,294 & 3,474,391

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN METRIC AND TOLERANCES ARE: <0.5mm 0.5 - 6mm 6 - 30mm 30 - 120mm ANGLES ± 0.05mm ± 0.1mm ± 0.2mm ± 0.3mm ± 1°	MATERIAL	DRAWN	DATE	TITLE QUICK CRIMP 'N' BULKHEAD JACK FOR RG58/U, 58A/U, 58B/U, 58C/U, 141/U & 141A/U CABLES		Amphenol RF Danbury CT USA, Tainan, Taiwan, Shenzhen, China www.amphenolrf.com
NOTICE - These drawings, specifications, or other data (1) are, and remain the property of Amphenol corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. the furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights to permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.	-	ENGINEER	DATE			
	REFERENCE EPA 802145-51	APPROVED	DATE	SCALE: 3.0:1.0	SHEET 2 OF 2	
	FINISH	CAD FILE			DWG SIZE	
		I: /N/82-5378		B	R	DRAWING NO.82-5378
						ITEM NO.82-5378
						PART NO.82-5378