



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!




Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



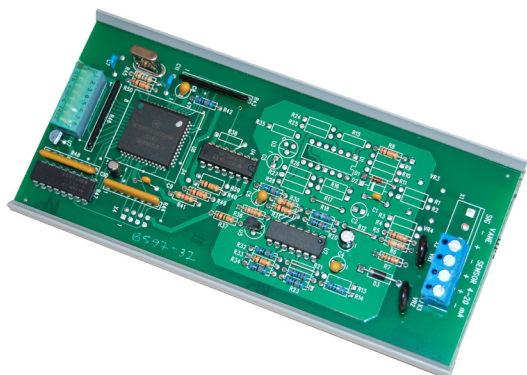

Track mounted transmitter

DESCRIPTION & FEATURES

The RLT converts the output of a tipping bucket rain gauge to a 4-20 mA signal. The RLT rain gauge is fabricated of heavy duty PVC, aluminum and stainless steel. It consists of an outer funnel, screen, inner funnel and tipping bucket. Precipitation entering the collection orifice fills the calibrated tipping bucket assembly. When the bucket fills to the calibrated amount, the bucket tips. Another bucket is brought into place and the precipitation sample is discharged through the dump tubes to the ground below. This produces a switch closure which is detected by the electronics in the separate transmitter. The 4-20 mA transmitter board is track mounted and powered by the milliamp loop. Each tip of the bucket causes the output signal to increase 1% of full scale. The rain gauge range is 0-1.00" over the 4-20 mA output. The transmitter will reset after 100 bucket tips or 1" of precipitation.



Rain Gauge

ORDERING INFO

PART NUMBER

RLT Rainfall Gauge with 20' 2 conductor cable and 4-20 mA transmitter

ACCESSORIES

SA2W Wall mount 2 wire Surge/Lightning Arrestor
 SA4W Wall mount 4 wire Surge/Lightning Arrestor
 DK191 Loop Powered Display Series
 DK190F Loop Powered Display
 DK807/907 Loop Powered Display Series
 BDR-924/999 4-20 mA Controlled Display Series
 PW1.0 Power Supply
 PW1.5 Power Supply
 PW2-24 Power Supply
 CVC 4-20 mA Calibrator

SPECIFICATIONS

Range:	0-1.00" = 4-20 mA output
Electronics Accuracy:	+/-1%
Rain Gauge Accuracy:	+/-4%
Transmitter Dimensions:	Track Mount 2.5"W x 6.25"L x 1.5"H
Rain Gauge Dimensions:	8.4" Diameter x 12.0"H
Shipping Weight:	8 lbs.
Operating Temperature:	Rain Gauge -40 to 60° C Transmitter 0 to 60° C
Transmitter Connections:	Screw terminals for 12AWG or smaller
Transmitter Power:	Powered by the 4-20 mA loop current
Rain Gauge Mounting:	3 equally spaced legs with 1/4" bolt holes on 9.5" diameter bolt circle
Accessories:	Surge/Lightning Arrestors

