



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Simple Encoder Kit

RS030

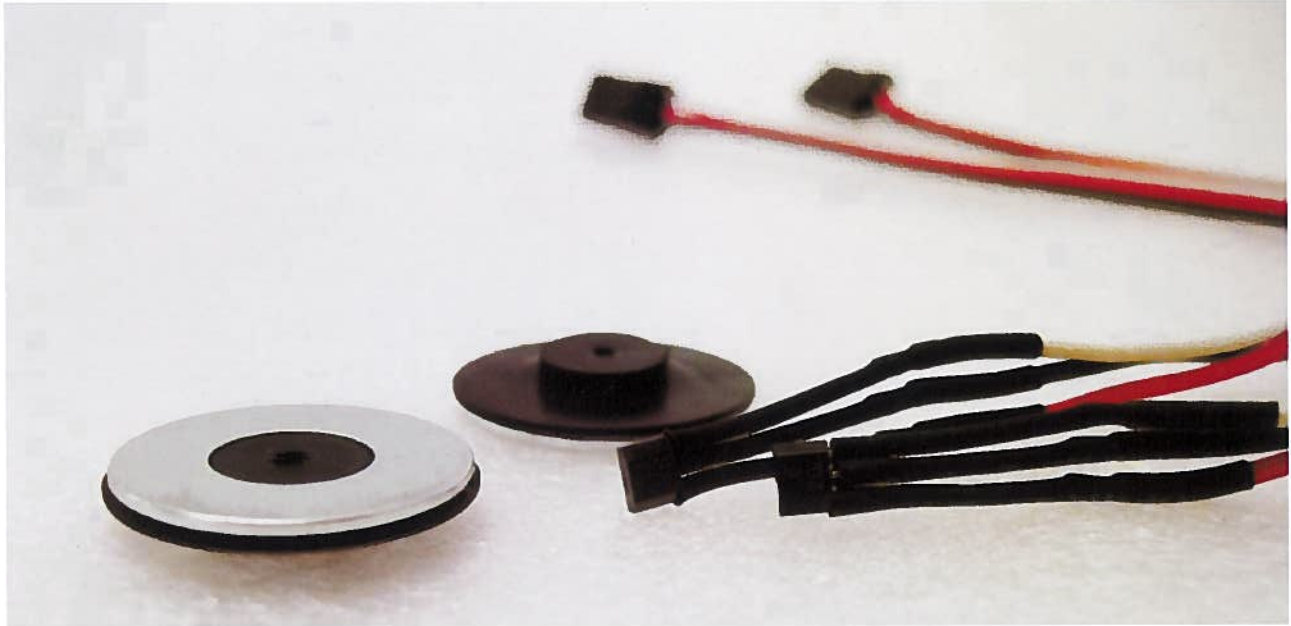

The simple encoder kit from DAGU consists of two neodymium 8-pole magnets with rubber hubs and two hall-effect sensors terminated with 150mm (6inch) cable and 3 pin female servo headers.

The magnets have 4 north poles and 4 south poles and are strong enough that the sensor can detect the poles from more than 3mm (1/8inch). This means that the sensors do not need to be precisely mounted to detect the poles. The rubber hubs will press fit over most small motor and drive shafts used in low power gearboxes. A small screw may also be used to attach the magnets in some cases.

The hall-effect sensors will work on voltages from 3V to 24V and include reverse polarity protection. The open drain output, when fitted with an external pullup resistor will drive any logic circuit from 3V to 24V and can also drive a LED or any other small load less than 25mA.


These sensors can plug directly into any DAGU, Arduino compatible controller and use the processors internal pullup resistors eliminating the need for any external components or wiring.

Specifications:

Supply voltage: 3V-24V
Supply current: 4mA per sensor
Output voltage: 26V maximum
Output current: 25mA continuous
Output type: Open drain

Wiring:

White wire: Output
Red wire: +3V to 24V
Black wire: Ground (0V)

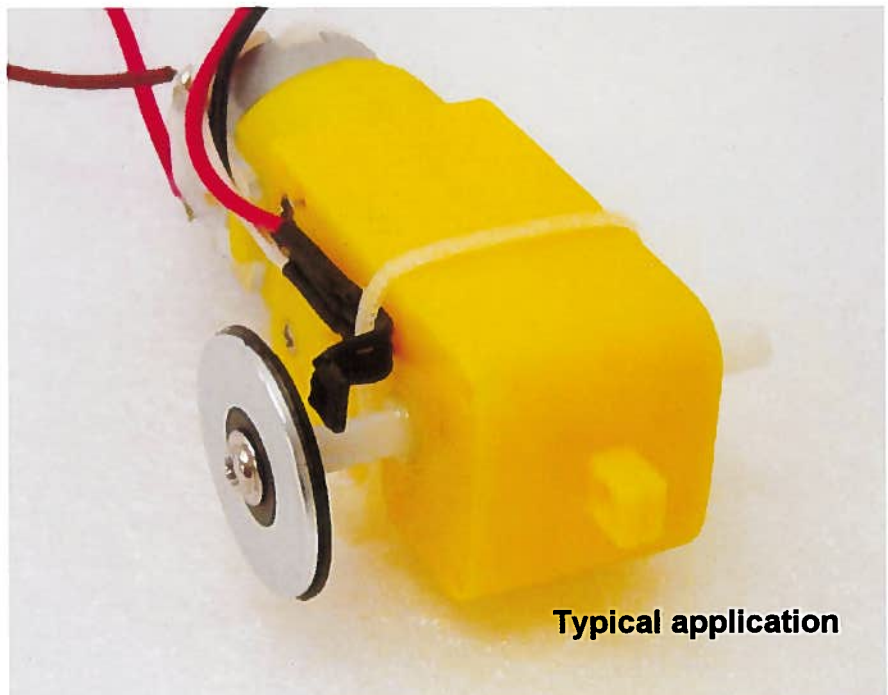

Typical application