



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!





## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



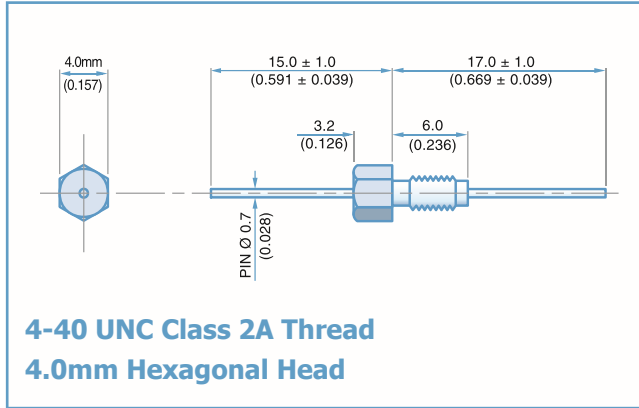

**Electrical Details**

Electrical Configuration	C Filter	
Capacitance Measurement	@ 1000hr Point	
Current Rating	10A	
Insulation Resistance (IR)	10GΩ or 1000ΩF	
Temperature Rating	-55°C to +125°C	
Ferrite Inductance (Typical)	Not Applicable	

**Mechanical Details**

Head (A/F)	4mm (0.157")
Nut A/F	Not Applicable
Washer diameter	Not Applicable
Mounting Torque	Not Applicable
Mounting Hole Diameter	4-40 UNC Class 2B tapped hole
Max. Panel Thickness	Not Applicable
Weight (Typical)	0.5g (0.017oz)
Finish	Silver plate on copper undercoat

Product Code	Capacitance (±20%) UOS	Dielectric	Rated Voltage (Vdc)	DWV (Vdc)	Typical No-Load Insertion Loss (dB)								
					0.01MHz	0.1MHz	1MHz	10MHz	100MHz	1GHz			
*SFAAC5000100ZC	10pF -20% / +80%	COG/NP0	500#	750	-	-	-	-	-	4			
SFAAC5000150ZC	15pF -20% / +80%				-	-	-	-	-	7			
SFAAC5000220ZC	22pF -20% / +80%				-	-	-	-	-	10			
SFAAC5000330ZC	33pF -20% / +80%				-	-	-	-	-	12			
*SFAAC5000470ZC	47pF -20% / +80%				-	-	-	-	1	15			
*SFAAC5000680MC	68pF				-	-	-	-	2	18			
*SFAAC5000101MC	100pF				-	-	-	-	4	22			
SFAAC5000151MC	150pF				-	-	-	-	7	25			
*SFAAC5000221MC	220pF				-	-	-	-	10	29			
*SFAAC5000331MC	330pF				-	-	-	-	13	33			
*SFAAC5000471MX	470pF	†X7R	500#	750	-	-	-	1	16	35			
SFAAC5000681MX	680pF				-	-	-	2	19	36			
*SFAAC5000102MX	1.0nF	X7R	500#	750	-	-	-	4	23	41			
SFAAC5000152MX	1.5nF				-	-	-	7	26	45			
*SFAAC5000222MX	2.2nF				-	-	-	10	30	50			
SFAAC5000332MX	3.3nF				-	-	-	13	33	52			
*SFAAC5000472MX	4.7nF				-	-	1	16	36	55			
*SFAAC5000682MX	6.8nF				-	-	2	19	39	57			
*SFAAC5000103MX	10nF				-	-	4	22	41	60			
*SFAAC5000153MX	15nF				-	-	7	25	44	62			
*SFAAC5000223MX	22nF				-	-	10	29	46	65			
SFAAC5000333MX	33nF				-	-	13	33	48	68			
*SFAAC2000473MX	47nF				-	200	500	-	1	16	35	50	70
SFAAC2000683MX	68nF				-	200	500	-	2	19	39	54	>70
*SFAAC1000104MX	100nF				-	100	250	-	4	22	41	57	>70
*SFAAC0500154MX	150nF				-	50	125	-	7	25	45	60	>70

# Also rated for operation at 115Vac 400Hz. Self heating will occur - evaluation in situ recommended. \* Recommended values. † Also available in COG/NP0.

**Ordering Information - SFAAC range**

SF	A	A	C	500	0333	M	X	O
Type	Case style	Thread	Electrical configuration	Voltage (dc)	Capacitance in picofarads (pF)	Tolerance	Dielectric	Hardware
Syfer Filter	4.0mm Hex Head	4-40 UNC	C = C Filter	<b>050</b> = 50V <b>100</b> = 100V <b>200</b> = 200V <b>500</b> = 500V	First digit is 0. Second and third digits are significant figures of capacitance code. The fourth digit is number of zeros following Example: <b>0101</b> = 100pF <b>0332</b> = 3300pF	<b>M</b> = ±20% <b>Z</b> = -20+80%	<b>C</b> = COG/NP0 <b>X</b> = X7R	<b>O</b> = Without

Note: The addition of a 4-digit numerical suffix code can be used to denote changes to the standard part. Options include for example: change of finish / alternative voltage rating / non-standard intermediate capacitance values / test requirements. Please refer specific requests to the factory.