



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



# SI-3000LSA Series Surface-Mount, Low Current Consumption, Low Dropout Voltage

## ■ Features

- Compact surface-mount package (SOP8)
- Output current: 1 A
- Low circuit current at output OFF:  $I_{Q(OFF)} \leq 1 \mu\text{A}$  ( $V_C = 0 \text{ V}$ )
- Low dropout voltage:  $V_{DIF} \leq 0.8 \text{ V}$  (at  $I_O = 1 \text{ A}$ )  
 $V_{DIF} \leq 1.2 \text{ V}$  ( $I_O = 1 \text{ A}$ ) for SI-3018LSA
- 4 types of output voltages (1.8 V, 2.5 V, 3.3 V, 5.0 V) available
- Output ON/OFF control terminal voltage compatible with LS-TTL
- Built-in foldback-type-overcurrent and thermal protection circuits

## ■ Absolute Maximum Ratings

( $T_a = 25^\circ\text{C}$ )

Parameter	Symbol	Ratings	Unit
DC Input Voltage	$V_{IN}$	16	V
Output control terminal voltage	$V_C$	$V_{IN}$	V
DC Output Current	$I_O$	1	A
Power Dissipation	$P_{D1}^{*1}$	1.16	W
	$P_{D2}^{*2}$	1.1	W
Junction Temperature	$T_J^{*3}$	-30 to +150	$^\circ\text{C}$
Operating Ambient Temperature	$T_{OP}$	-30 to +150	$^\circ\text{C}$
Storage Temperature	$T_{STG}$	-30 to +150	$^\circ\text{C}$
Thermal Resistance (Junction to Lead (pin 8))	$\theta_{J-L}$	36	$^\circ\text{C/W}$
Thermal Resistance (Junction to Ambient Air)	$\theta_{J-a}^{*2}$	100	$^\circ\text{C/W}$

\*1: When mounted on glass-epoxy board 56.5 × 56.5 mm (copper laminate area 100%).

\*2: When mounted on glass-epoxy board 40 × 40 mm (copper laminate area 100%).

\*3: Thermal protection circuits may be activated if the junction temperature exceeds 135 $^\circ\text{C}$ .

## ■ Applications

- Auxiliary power supplies for PC
- Battery-driven electronic equipment

## ■ Recommended Operating Conditions

Parameter	Symbol	Ratings				Unit
		SI-3018LSA	SI-3025LSA	SI-3033LSA	SI-3050LSA	
DC Input Voltage Range	$V_{IN}$	3.1 to 3.5 <sup>*1</sup>	<sup>*2</sup> to 3.5 <sup>*1</sup>	<sup>*2</sup> to 5.2 <sup>*1</sup>	<sup>*2</sup> to 8.0	V
DC Output Current Range	$I_O$	0 to 1				A
Operating Junction Temperature	$T_{JP}$	-20 to +125				$^\circ\text{C}$
Operating Ambient Temperature	$T_{AP}$	-30 to +85				$^\circ\text{C}$

\*1:  $V_{IN}$  (max) and  $I_O$  (max) are restricted by the relation  $P_D = (V_{IN} - V_O) \times I_O$ .

Please calculate these values referring to the reference data on page 71.

\*2: Refer to the Dropout Voltage parameter.

## ■ Electrical Characteristics

( $T_a = 25^\circ\text{C}$ ,  $V_C = 2\text{V}$ , unless otherwise specified)

Parameter	Symbol	Ratings												Unit
		SI-3018LSA			SI-3025LSA			SI-3033LSA			SI-3050LSA			
		min.	typ.	max.	min.	typ.	max.	min.	typ.	max.	min.	typ.	max.	
Output Voltage	$V_O$	1.764	1.800	1.836	2.450	2.500	2.550	3.234	3.300	3.366	4.90	5.00	5.10	V
	Conditions	$V_{IN} = 3.3\text{V}$ , $I_O = 0.5\text{A}$			$V_{IN} = 3.3\text{V}$ , $I_O = 0.5\text{A}$			$V_{IN} = 5\text{V}$ , $I_O = 0.5\text{A}$			$V_{IN} = 6\text{V}$ , $I_O = 0.5\text{A}$			
Dropout Voltage	$V_{DIF}$	-			0.4			0.4			0.4			V
	Conditions	-			$I_O \leq 0.5\text{A}$			$I_O \leq 0.5\text{A}$			$I_O \leq 0.5\text{A}$			
	Conditions	0.6	1.2				0.8			0.8			0.8	
Line Regulation	$\Delta V_{LINE}$	2			2			3			3			mV
	Conditions	$V_{IN} = 3.1$ to $3.5\text{V}$ , $I_O = 0.3\text{A}$			$V_{IN} = 3.1$ to $3.5\text{V}$ , $I_O = 0.3\text{A}$			$V_{IN} = 4.5$ to $5.5\text{V}$ , $I_O = 0.3\text{A}$			$V_{IN} = 6$ to $7\text{V}$ , $I_O = 0.3\text{A}$			
Load Regulation	$\Delta V_{LOAD}$	10			10			10			10			mV
	Conditions	$V_{IN} = 3.3\text{V}$ , $I_O = 0$ to $1\text{A}$			$V_{IN} = 3.3\text{V}$ , $I_O = 0$ to $1\text{A}$			$V_{IN} = 5\text{V}$ , $I_O = 0$ to $1\text{A}$			$V_{IN} = 6\text{V}$ , $I_O = 0$ to $1\text{A}$			
Temperature Coefficient of Output Voltage	$\Delta V_O / \Delta T_a$	$\pm 0.3$			$\pm 0.3$			$\pm 0.3$			$\pm 0.5$			mV/ $^\circ\text{C}$
	Conditions	$V_{IN} = 3.3\text{V}$ , $I_O = 5\text{mA}$ , $T_J = 0$ to $100^\circ\text{C}$			$V_{IN} = 3.3\text{V}$ , $I_O = 5\text{mA}$ , $T_J = 0$ to $100^\circ\text{C}$			$V_{IN} = 5\text{V}$ , $I_O = 5\text{mA}$ , $T_J = 0$ to $100^\circ\text{C}$			$V_{IN} = 6\text{V}$ , $I_O = 5\text{mA}$ , $T_J = 0$ to $100^\circ\text{C}$			
Ripple Rejection	$R_{REJ}$	60			57			55			55			dB
	Conditions	$V_{IN} = 3.3\text{V}$ , $f = 100$ to $120\text{Hz}$			$V_{IN} = 3.3\text{V}$ , $f = 100$ to $120\text{Hz}$			$V_{IN} = 5\text{V}$ , $f = 100$ to $120\text{Hz}$			$V_{IN} = 6\text{V}$ , $f = 100$ to $120\text{Hz}$			
Quiescent Circuit Current	$I_Q$	1.7			1.7			1.7			1.7			mA
	Conditions	$V_{IN} = 3.3\text{V}$ , $I_O = 0\text{A}$			$V_{IN} = 3.3\text{V}$ , $I_O = 0\text{A}$			$V_{IN} = 5\text{V}$ , $I_O = 0\text{A}$			$V_{IN} = 6\text{V}$ , $I_O = 0\text{A}$			
Circuit Current at Output OFF	$I_{Q(OFF)}$	1			1			1			1			$\mu\text{A}$
	Conditions	$V_{IN} = 3.3\text{V}$ , $I_O = 0\text{A}$ , $V_C = 0\text{V}$			$V_{IN} = 3.3\text{V}$ , $I_O = 0\text{A}$ , $V_C = 0\text{V}$			$V_{IN} = 5\text{V}$ , $I_O = 0\text{A}$ , $V_C = 0\text{V}$			$V_{IN} = 6\text{V}$ , $I_O = 0\text{A}$ , $V_C = 0\text{V}$			
Overcurrent Protection Starting Current <sup>*1,3</sup>	$I_{S1}$	1.2			1.2			1.2			1.2			A
	Conditions	$V_{IN} = 3.3\text{V}$			$V_{IN} = 3.3\text{V}$			$V_{IN} = 5\text{V}$			$V_{IN} = 6\text{V}$			
$V_C$ Terminal	Control Voltage (Output ON) <sup>*2</sup>	$V_C, IH$	2.0		2.0		2.0		2.0		2.0		V	
	Control Voltage (Output OFF) <sup>*2</sup>	$V_C, IL$	0.8		0.8		0.8		0.8		0.8			
	Control Current (Output ON)	$I_C, IH$	40		40		40		40		40			
	Conditions	$V_C = 2\text{V}$												
	Control Current (Output OFF)	$I_C, IL$	0		0		0		0		0			
Conditions	$V_C = 0\text{V}$													

\*1:  $I_{S1}$  is specified at the 5% drop point of output voltage  $V_O$  on the condition that  $V_{IN} = 3.3 \text{ V}$  (5 V for SI-3033LSA), and  $I_O = 0.5 \text{ A}$ .


\*2: Output is OFF when the output control terminal  $V_C$  is open. Each input level is equivalent to LS-TTL level. Therefore, the device can be driven directly by LS-TTLs.

\*3: These products cannot be used in the following applications. Because these applications require a certain current at start-up and so the built-in foldback-type overcurrent protection may cause errors during start-up stage.

(1) Constant current load (2) Positive and negative power supply (3) Series-connected power supply (4)  $V_O$  adjustment by raising ground voltage

External Dimensions (SOP8)

(Unit : mm)

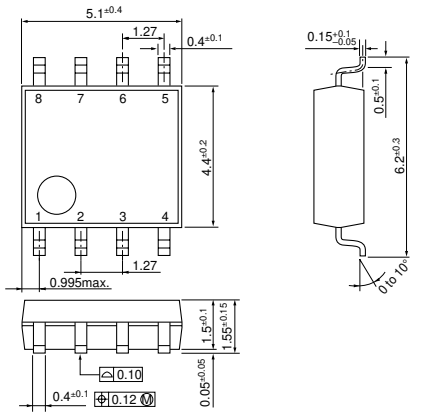


Pin Assignment


- ① VIN
- ② NC (Leave open)
- ③ VIN
- ④ Vc
- ⑤ GND
- ⑥ GND
- ⑦ Vo
- ⑧ Vo

Plastic Mold Package Type  
 Flammability: UL94V-0  
 Product Mass: Approx. 0.1g

Block Diagram

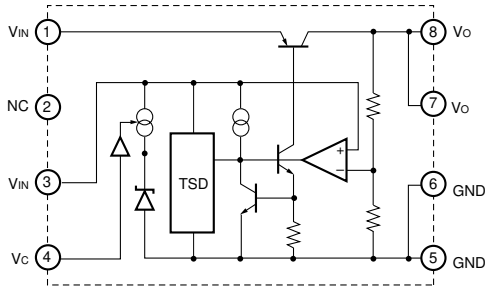


Typical Connection Diagram

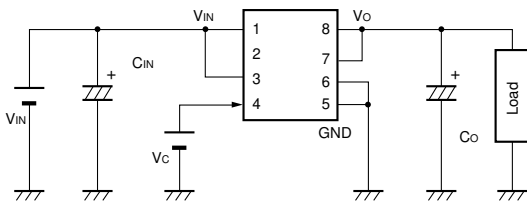


Co: Output capacitor (22  $\mu$ F or larger)  
 CIN: Input capacitor (10  $\mu$ F)  
 This capacitor is required in the case of an inductive input line or long wiring.  
 Tantalum capacitors are recommended for CIN and Co, particularly at low temperatures.  
 \* Leave pin 2 open.

Reference Data

PCB Copper Laminate Area vs. Junction to Ambient Air Thermal Resistance

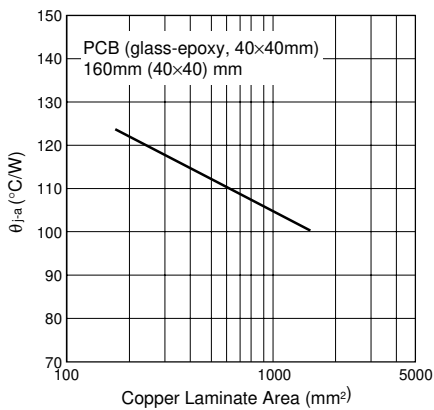

Allowable Output Current (vs. VIN-VOUT Voltage Difference) VIN-Io max

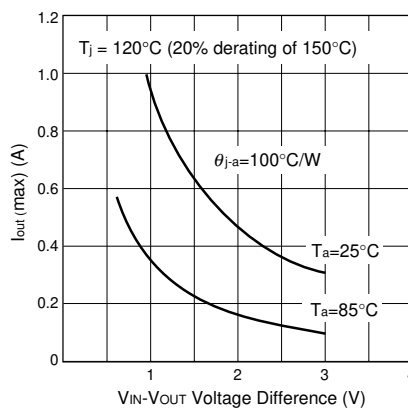

The inner frame stage, on which the PTR is mounted, is directly connected to the Vout pin. Therefore, enlarging the copper laminate area around the Vout pin is really effective for a heat radiation.